


FROM BELGIUM WITH LOVE



WEVER & DUCRÉ
LIGHTING

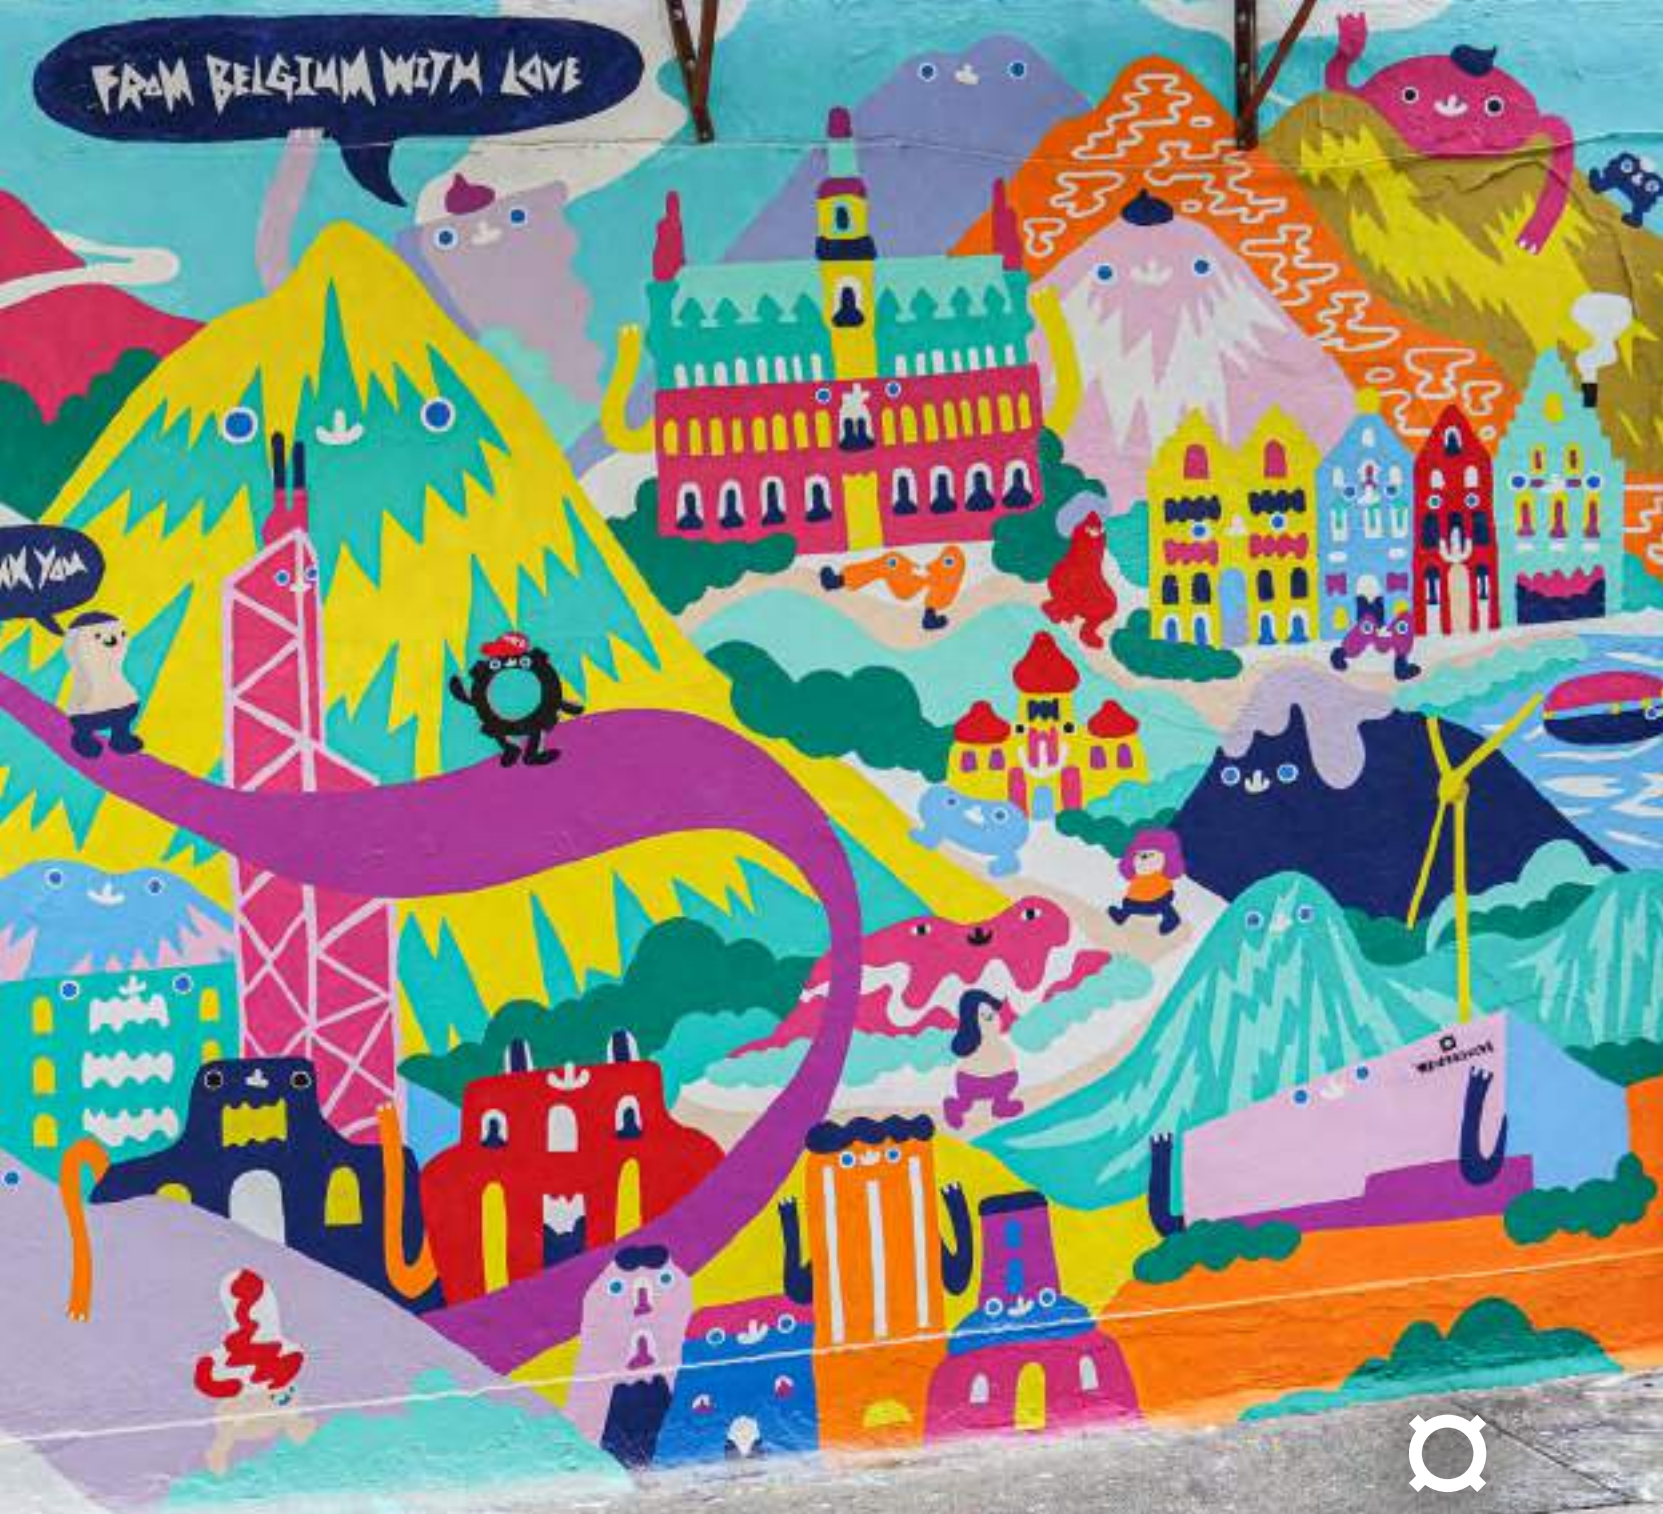

It's a mild November day in the middle of Hong Kong, where Zoie Lam is working on one of her brightly coloured murals. The street artist grew up in the vibrant metropolis and is bringing a slice of Belgian joie de vivre to the city for Wever & Ducré. "From Belgium with love" is the message that Zoie illustrates in her intense, colourful style. The result is a fictional world of Belgian and local architecture that fits perfectly into her ZLISM universe. "I just want people to feel good when they see my mural", says Zoie and lets us feel this positive energy with every brushstroke.

Es ist ein lauer Novembertag inmitten von Hongkong, wo Zoie Lam gerade an einem ihrer leuchtend-bunten Murals arbeitet. Die Street-Art-Künstlerin ist in der pulsierenden Metropole groß geworden und holt für Wever & Ducré ein Stückchen belgischer Lebensfreude in die Stadt. „From Belgium with love“ lautet die Botschaft, die Zoie in ihrem dichten, farbenfrohen Stil illustriert. So entsteht eine fiktive Welt aus belgischer und lokaler Architektur, die perfekt in ihr ZLISM-Universum passt. „Die Menschen sollen sich einfach gut fühlen, wenn sie mein Mural sehen“, meint Zoie und lässt uns diese positive Energie mit jedem Pinselstrich spüren.

THE MESSAGE IS LOVE

Beam us up, Zoie

WELCOME TO PLANET ZLISM

A small, brightly coloured planet where only good people live – that is Zoie Lam's vision of a different, better society. And the Hong Kong-born artist paints it on the wall in bright colours. She calls this extraordinary place ZLISM, a dense maze of streets and houses in which the inhabitants constantly experience new adventures. Zoie continues these stories in each work, spreading her own personal message of love, respect, and joie de vivre. Where does the name ZLISM come from? It is made up of her initials "ZL" and "LISM", and stands for the artist's very own, positive philosophy.

Ein kleiner knallbunter Planet, auf dem nur gute Menschen leben, das ist Zoie Lams Vision einer anderen, besseren Gesellschaft. Und die malt die aus Hongkong stammende Künstlerin in leuchtenden Farben an die Wand. ZLISM nennt sie diesen außergewöhnlichen Ort, der aus einem dichten Gewirr von Straßen und Häusern besteht, in dem die Bewohner immer neue Abenteuer erleben. Woher der Name ZLISM kommt? Er setzt sich aus ihren Initialen „ZL“ und „LISM“ zusammen und steht für die ganz eigene positive Philosophie der Künstlerin.



HAVE A LOOK AT OUR LIMITED ARTIST EDITION

weverducre.com/artist-edition24



CEILING RECESSED




























































52 – 159





















































						DEEP ADJUST		
MATCH POINT 57	DEEP POINT 59	DEEP BIJOU 61	DEEP PETIT 63	DEEP 65	DEEPER 67	PETIT 69	DEEP ADJUST 71	
DEEP ADJUST TRIMLESS 75	DEEP ADJUST ASYM 77	DEEP ADJUST FORT 79	SPINEO 81	RONY POINT 83	RONY 85	RON 87	PIRRO PETIT 91	PIRRO 93
		STRANGE PETIT TRIMLESS						
PLANO PETIT 97	PLANO 99	STRANGE PETIT TRIMLESS 101		STRANGE TRIMLESS 103	SNEAK 105	SNEAK TRIMLESS 107	LECA 109	MATCH 113
CENO 119	BLIEK PETIT TRIMLESS 123	BLIEK PETIT 123	BLIEK ROUND 127	BLIEK SQUARE 129	RUVI 131	DEEP POINT IP44 135	DEEP BIJOU IP65 137	DEEP PETIT IP65 139
		MATCH POINT IP44						
DEEP IP65 IP44 141	DEEPER IP44 143	MATCH POINT IP44 145		TAIO IP65 147	RINI SNEAK IP44 149	LUNA ROUND IP44 151	LUNA SQUARE IP44 151	PLANO IP44 153
				CEILING SURFACE 160 – 289				
MIRBI IP44 1.0 157	MIRBI IP44 2.0 157	CITY IP44 159						
MIRBI IP44 1.0 157	MIRBI IP44 2.0 157	CITY IP44 159		BOX MINI 165	BOX 169	DOCUS MINI 173	DOCUS 175	HEXO MINI 179
HEXO 181	RAY MINI 185	RAY 189	SOLID BIJOU 193	SOLID PETIT 195	SOLID 197	TRACE 201	PIRRO PETIT 203	PIRRO SPOT 205




















































PIRRO OPAL 211	PLANO PETIT 213	PLANO 215	SIRRO 217	LECA 221	MATCH 223	CENO 227	BLIEK PETIT 235	MICK 237
SARA ON BASE 241	SQUBE ON BASE 243	FIL SPIN 251		TRACE SPIN 253	PERLEZ SPIN 255	TRACE GRID 257	PERLEZ GRID 259	VENN 261
WIRO 265	MIRRO 267	CLEA 271	J.J.W. 273	ROOMOR OFFICE 275	FINLIN 277	PERLEZ IP44 279	TAIO IP65 281	MIRBI IP44 1.0 283
				STREX TRACKS 290 – 329				
MIRBI IP44 2.0 283	ROB IP44 285	ROBY IP44 287	TOWNA IP44 289	STREX TRACKS 290 – 329				
BOX 311				DOCUS 313	HEXO 315	RAY 317	DOT LIGHT MODULE 319	OPAL LIGHT MODULE 319
MATCH 321					ODREY 323	SOLLI 329	48V TRACKS 295	
CENO 303					MATCH 307	MICK 309	CENO 303	
1-PHASE TRACKS 331					SARA 333	SQUBE 337	PIRRO 339	DRO 341
HEXO 343					RAY 343	ODREY 345	HEXO 343	
3-PHASE TRACKS 349					SQUBE 351	CENO FORT 353	HEXO 355	RAY 355
					MORE ON THE NEXT PAGE			
ROOMOR OFFICE 357					MORE ON THE NEXT PAGE			

Indoor

Indoor

SYSTEMS 358 – 369		 PIRRO SYSTEM 361	 ELLO SYSTEM 362	 ILANE 367	CEILING SUSPENDED 370 – 495				 TRACE CHANDELIER 373	 NET 377	 FINELLE 381	 FIL 383					
 FINLIN 385	 KUJO 387	 DARF 391	 ELLO 395	 GIGANT 397	 TRACE 1.1 399	 TRACE 2.0 401	 CONE 403	 CORK 405	 MATCH 407	 SOLLI 409	 DRO 413	 WIRO CONE 417	 WIRO 417	 WIRO DIAMOND 423	 WIRO GLOBE 427	 MIRRO 431	 J.J.W. 437
 ROOMOR 445	 ROOMOR OFFICE 451	 BISHOP 455	 ODREY 461	 ODREY MULTI 461	 RAY 469	 RAY MULTI 469	 HEXO 471	 HEXO MULTI 471	 WETRO 475	 WETRO MULTI 475	 CLEA 483	 CLEA MULTI 483	 SHIEK 2.0 487	 SHIEK MULTI 487	 SHIEK 3.0 489	 SHIEK 4.0 491	 DINOR 1.0 493
 DINOR 2.0 493	 DINOR 3.0 493	WALL RECESSED 497 – 509		 RETO 499	 LITO 1.0 501	 LITO 2.0 501	 STRIPE 503	 STRANGE TRIMLESS 505	 THEMIS 507								
 ORIS 509	WALL SURFACE 510 – 643		 CENO 513	 MATCH 515	 TRACE 517	 TRACE SLIM 521	 ODREY 525	 BOX MINI 533	 BOX 535								

 DOCUS MINI 539	 HEXO MINI 541	 RAY MINI 543	 RAY 545	 TRAIN 549	 CENTRAL 551	 LEENS 553	 BENTO 555	 DRO 557
 DARF 559	 ROOMOR 1.1 561	 ROOMOR 3.1 563	 WIRO 569	 CLEA 571	 J.J.W. 573	 MIRRO 581	 DOT 587	 TAPIS 591
 MILES ROUND 601	 MILES CARRÉ 605	 MILES 607	 FINLIN 1.0 609	 FINLIN 4.0 609	 FINLIN ROUND 613	 FIL SPIN 615	 VENN 617	 SARA SNOOZE 621
 MATCH SNOOZE 623	 MICK SNOOZE 625	 MICK WALL 627	 DOMINO 629	 SCAVA 631	 PERLEZ IP44 635	 RUVI IP44 639	 MIRBA IP44 641	 MIRBI LONG IP44 643
TABLE 645 – 655		 DRO 647	 DRO 649	 MIRRO 651	 ROOMOR 653	 REVER 655		
FLOOR 656 – 665		 DRO 647	 FINLIN 657	 MATCH 659	 DRO 661	 MIRRO 663	 ROOMOR 665	
SOFT ACOUSTICS		 MIRRO SOFT 269	 MIRRO SOFT 433	 SOLLI COCOON 411	 MIRRO SOFT 585	 TAPIS SOFT 597		

CEILING RECESSED 669 – 679	 DEEP BIJOU IP65 671	 DEEP PETIT IP65 673	 DEEP IP65 675	 TAIO IP65 677	 INTRA 679	CEILING SURFACE 681 – 699	 TRAM 683	 TUBE 685
	 TAIO 687	 RAY 689	 TRAIN 691	 TUBE CARRÉ 693	 BOX 695		 BLAS 1.0 697	 BLAS 2.0 697
WALL RECESSED 701 – 709	 RETO 703	 ORIS 707	WALL SURFACE 710 – 747	 TRAM 713	 TUBE 715	 TAIO 719	 RAY 721	 TRAIN 723
	 KIOSK 725	 CENTRAL 727		 TUBE CARRÉ 729	 BOX 733	 X-BEAM 737	 RETO 739	 PALOS 741
FLOOR RECESSED 749 – 763	 SWAM 747	 CARD 0.1 751	 CARD 0.2 751	 BLINK 753	 MAP 755	 MAP ASYM 759	 CHART 761	 CHART ASYM 763
	FLOOR SURFACE 764 – 803	 GEO 769	 REED 771	 POLA 773	 KIOSK 775	 SWAM 777	 TAPE 781	 STIPO 783
 STAKE FOLD 785		 X-BEAM 787	 GATE 789	 PALOS ROUND 791	 PALOS CARRÉ 795	 LINUS 799	 COSTA 1.0 801	 COSTA 2.0 803



HOW TO PRONOUNCE IT RIGHT

Weferantdookray, that's how it sounds when Anna from Germany pronounces our Franco-Flemish name. But how do our other colleagues say it? Find out in our "Say-our-name" challenge which shows how differently "Wever & Ducré" is pronounced around the world. Of course, you'll also find out how it's pronounced correctly.

Weferantdükreeh, so klingt's, wenn Anna aus Deutschland unseren französisch-flämischen Namen ausspricht. Doch wie machen's die anderen Kollegen? Das verrät Ihnen unsere „Say-our-name“-Challenge, die zeigt, wie unterschiedlich Wever & Ducré rund um den Erdball ausgesprochen wird. Wie's richtig gemacht wird, erfahren Sie dabei natürlich auch.



weverducre.com/pronunciation


Welcome to our *world*

We all know it, the famous glimpse at the ceiling during which you think: "Well, everyone really does have that light." That's why we strive to achieve lighting solutions that first and foremost fit the description: unique. Who inspires us in the process? People like you, who share our enthusiasm for beautiful things and attach as much importance to noble design as to high-quality workmanship. Does it sound passionate? Well, that's what it is. After all, life is simply far too short for boring lighting.

Wir kennen ihn alle, den berühmten Blick an die Decke, bei dem man sich denkt: „Also die Leuchte hat wirklich jeder“. Deshalb kämpfen wir für Lichtlösungen, die vor allem eines sind: einzigartig. Von wem wir uns dabei inspirieren lassen? Von Menschen wie Ihnen, die unsere Begeisterung für schöne Dinge teilen und auf edles Design ebenso viel Wert legen wie auf eine hochwertige Verarbeitung. Klingt leidenschaftlich? Ist es auch. Denn für langweilige Leuchten ist das Leben einfach viel zu kurz.



Exciting Belgian *design lighting* for everyone, delivered fast.

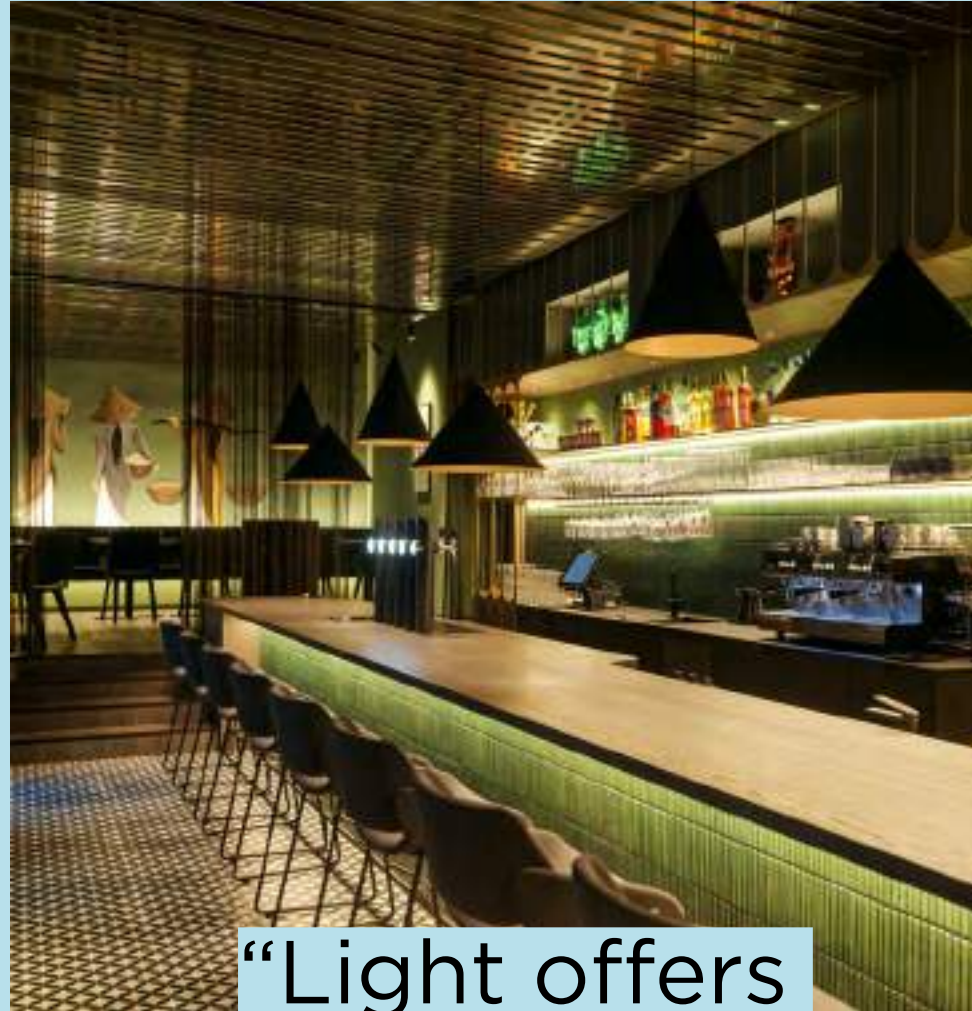

“Light offers
endless possibilities
to architects.”

CLEMENS HAMMER *Product Manager*

MAKES YOUR HEART BEAT FASTER

Don't worry, this can easily happen with our unusual designs. After all, we love to surprise you with new shapes, colours, and materials and create lights that are so much more than a simple light source. How do we achieve this? With many exciting collaborations and a team of international architects, artists, and in-house designers who make each of our lights truly unique.

Keine Sorge, das kann bei unseren außergewöhnlichen Designs schnell mal passieren. Schließlich lieben wir es, Sie mit neuen Formen, Farben und Materialien zu überraschen und Leuchten zu kreieren, die so viel mehr sind als eine simple Lichtquelle. Wie wir das hinbekommen? Mit vielen spannenden Kooperationen und einem Team aus internationalen Architekten, Künstlern und Inhouse-Designern, das jede unserer Leuchten zu einem echten Unikat macht.



Exciting Belgian *design lighting*



JUST WHAT YOU'VE BEEN LOOKING FOR

Whether you want to set creative accents or design entire interiors in a uniform design language – anything is possible thanks to our modern LED lights. And it's super easy. After all, their shape, colour, and size can be adapted to your needs and their installation options are incredibly versatile.

Egal, ob Sie kreative Akzente setzen oder ganze Interieurs in einer einheitlichen Designsprache gestalten möchten – mit unseren modernen LED-Leuchten ist alles möglich. Und das super-easy. Schließlich passen sie sich in Form, Farbe und Größe ganz an Ihre Bedürfnisse an und zeigen sich auch in Sachen Montage absolut flexibel.

READY FOR AN ONLINE DATE

Well, that's the way it is with our lights: Once you've fallen in love with a design, you naturally want to have it with you immediately. The good news is that we dispatch all products within just 48 hours. So simply check your favourite design's availability online. In the meantime, you can already put the champagne on ice.

Tja, so ist das mit unseren Leuchten: Hat man sich erst mal in ein Design verliebt, will man es natürlich sofort bei sich haben. Die gute Nachricht: Wir versenden alle Produkte innerhalb von nur 48 Stunden. Checken Sie die Verfügbarkeit Ihres Lieblings also einfach online. Den Champagner können Sie in der Zwischenzeit ja schon mal kaltstellen.




weverducre.com/products

IT'S ALL SYSTEMS GO IN 48 HOURS

For everyone, delivered fast

We love beautiful design because of its unusual shape, its special materials, and because it makes our lives easier. That's why we make sure our products are intuitive to use, easy to install, and simple to maintain right from the development stage. Even if you don't have a great deal of technical knowledge. So don't worry about complicated instructions and incomprehensible installation plans – our smart LED technology makes everything run smoothly. Whether in a cosy micro-apartment or the hippest club in town.

Wir lieben schönes Design nicht nur wegen seiner außergewöhnlichen Form oder der besonderen Materialien, sondern auch, weil es unser Leben leichter macht. Deshalb achten wir schon bei der Entwicklung unserer Produkte darauf, dass sie sich intuitiv bedienen, einfach montieren und problemlos warten lassen. Und das auch, wenn man über kein großes technisches Wissen verfügt. Also keine Angst vor komplizierten Anleitungen und unverständlichen Montageplänen – mit unserer smarten LED-Technik läuft alles ganz entspannt. Ob im kuscheligen Micro-Apartment oder im hippestem Club der Stadt.

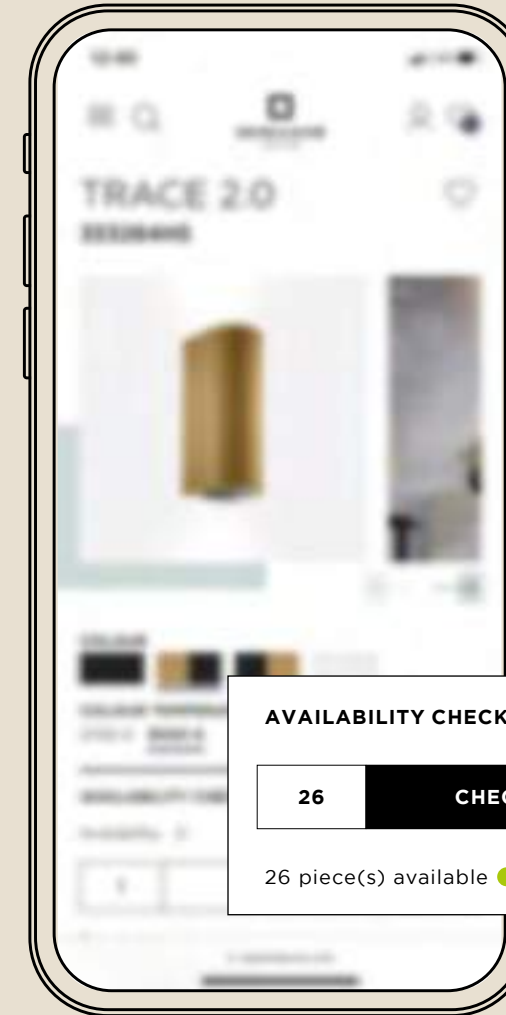

AVAILABILITY CHECK

26

CHECK AVAILABILITY

26 piece(s) available ●



It's not all about *chocolate.*



It's true: The smell of fresh waffles and sweet chocolate wafts around your nose on almost every corner in Belgium. But the enthusiasm for cool design is also in the air here. That's why there's no better place for us to be inspired by new colours, shapes, and materials. Preferably with a crispy waffle in our hands.

Es stimmt schon: Der Duft von frischen Waffeln und süßer Schokolade weht einem in Belgien an fast jeder Ecke um die Nase. Aber auch die Begeisterung für ausgefallenes Design liegt hier förmlich in der Luft. Deshalb gibt es für uns keinen schöneren Ort, um sich von neuen Farben, Formen und Materialien inspirieren zu lassen. Am besten mit einer knusprigen Waffel in der Hand.




weverducre.com/about

OUR HERITAGE STORY

From *Belgium* with love

Every story has to have a beginning. Ours begins in the early eighties, when a handful of young Belgians decide to start a new lighting company. So far, so good. Yet what name should the company be given? Since several official languages are spoken in Belgium – including Flemish and French – there was only one choice: The name would need to be equally at home in both worlds, phonetically. Then, by chance, a document fell into the hands of the company's founders: a little guide to a successful life. His advice: hard work ("WERklust"), trust ("VERtrouwen"), and enthusiasm ("ENthousiasme"), but also courage ("Durf") and a good dose of creativity ("CREativiteit"). Today, these five points still constitute our company philosophy.

Jede Geschichte braucht einen Anfang. Unsere beginnt in den frühen Achtzigern, als eine Handvoll junger Belgier beschließt, eine neue Leuchtenfirma zu gründen. So weit, so gut. Doch welchen Namen sollte das Unternehmen bekommen? Da in Belgien mehrere Amtssprachen – darunter Flämisch und Französisch – gesprochen werden, blieb nur eine Möglichkeit: Der Name musste phonetisch in beiden Welten zuhause sein. Da fiel den Firmengründern zufällig ein Schriftstück in die Hände: ein kleiner Leitfaden für ein erfolgreiches Leben. Sein Rat: harte Arbeit (WERklust), Vertrauen (VERtrouwen), Begeisterung (ENthousiasme), gepaart mit Mut (Durf) und einer gehörigen Portion Kreativität (CREativiteit). Diese fünf Punkte bilden bis heute unsere Firmenphilosophie.

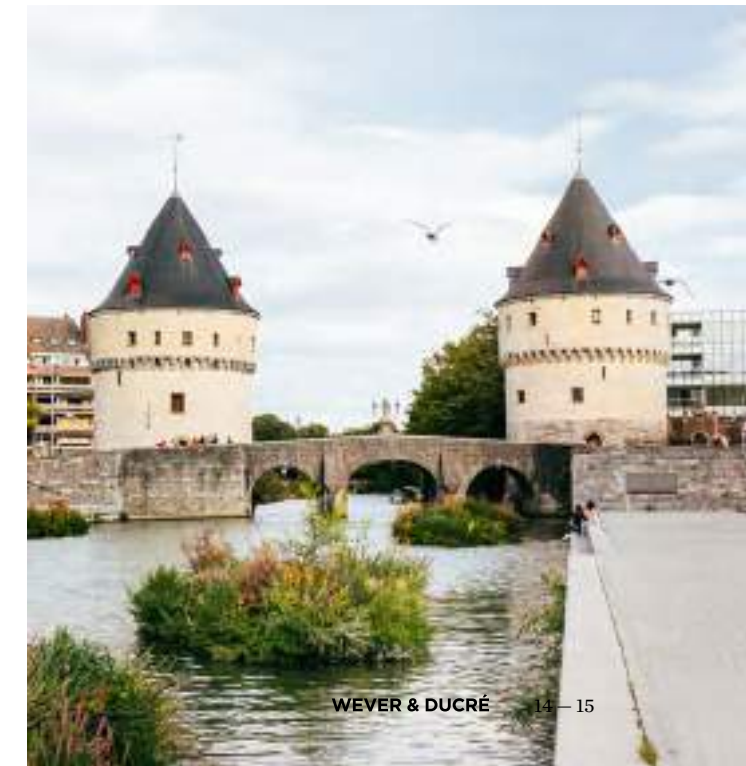

Austria
GRAZ | VIENNA

Belgium
BRUSSELS | KORTRIJK

Finland
HELSINKI

France
LYON | PARIS

Germany
COLOGNE | FRANKFURT AM MAIN
STUTTGART

Italy
VENEZIA

The Netherlands
AMSTERDAM

Norway
OSLO

Poland
WARSAW

Spain
BARCELONA

Sweden
STOCKHOLM

Switzerland
LUCERNE

United Kingdom
LONDON

China
HONG KONG

India
DELHI

UAE
DUBAI

To all around the world

What makes Wever & Ducré luminaires so fantastic? Simply that they feel at home in 60 countries around the world. They shine just as comfortably in a London rooftop bar as in an ultra-modern high-rise apartment in Hong Kong. What is the secret of their success? Exceptional design and high-quality materials give each luminaire a personal appeal for everyone. Sound perfect? Then you will be delighted to learn not just about the super-fast delivery for our products but also about the plastic-free packaging for shipping we have been using for four years, even for the smallest screws. Just take a look to the left and select one of the various showrooms. Our new collection is ready and waiting for you.

Das Tolle an Wever & Ducré-Leuchten? Sie sind in 60 Ländern der Welt zuhause. Und fühlen sich in der Londoner Rooftop-Bar genauso wohl wie in einem trendigen City-Apartment in Hongkong. Ihr Erfolgsgeheimnis? Außergewöhnliches Design und hochwertige Materialien, die jede Leuchte zum ganz persönlichen Lieblingsstück machen. Klingt perfekt? Dann wird es Sie freuen, dass unsere Produkte nicht nur superschnell, sondern seit vier Jahren auch ganz ohne Plastikverpackung geliefert werden. Und das bis zur kleinsten Schraube. Also gleich einen Blick nach links werfen und sich einen der verschiedenen Showrooms aussuchen. Unsere neue Kollektion wartet schon auf Sie.

READY TO PLAN YOUR TRIP?

Every trip has its own charm, especially when you combine it with a visit to one of our showrooms. It makes every trip special. With our showroom travel guides, the planning of your city trip is almost completed. In addition to the classic highlights, our guides include culinary and exciting tips from locals to make your city trip anything but boring.

Jede Reise hat ihren ganz besonderen Charme, vor allem wenn man einen Städtetrip mit einem Besuch in einem unserer Schauräume verbindet. Damit wird jede Reise zu etwas ganz Besonderem, neben den klassischen Highlights beinhalten unsere Travel-Guides kulinarische und spannende Geheimtipps, die Ihren City-Trip alles andere als langweilig machen.



weverducre.com/travel-guides



weverducre.com/locations



“Making products with a long lifetime is part of our *sustainability concept*.”

JOHAN DE SMEDT *Managing Director*



WE ARE COMMITTED

Sustainable by *function*

The key for us is to give you luminaires that still have a friendly glow even after many years of service. How do we do that? By ensuring product quality that meets the standards of the Ecodesign Directive and making spare parts available for a particularly long lifespan. So should you ever need to replace your LED engine, you can do so for 20 years without any problems. Sound like a fair deal? Then you will also be pleased to know that we give you a 5-year guarantee* on every product and that your luminaire comes to you in 100% plastic-free packaging.



weverducre.com/sustainability

Das Wichtigste für uns sind Leuchten, die Ihnen auch nach vielen Jahren noch freundlich entgegenstrahlen. Wie wir das hinbekommen? Mit einer Produktqualität, die den Standards der Ökodesign-Richtlinie entspricht, und Ersatzteilen, die besonders lange verfügbar sind. Sollten Sie Ihre LED-Engine also einmal austauschen müssen, ist das 20 Jahre lang problemlos möglich. Klingt nach einem fairen Deal? Dann wird es Sie auch freuen, dass wir Ihnen auf jedes Produkt 5 Jahre Garantie* gewähren und Ihre Leuchte in einer 100% plastikfreien Verpackung zu Ihnen kommt.

*The applicable conditions of guarantee are available to view at weverducre.com.
Es gelten die auf weverducre.com verfügbaren Garantiebedingungen.



dive deep!



feel jade!



pay attention!



give warmth!



stay together!



be rooted!



come closer!



live simple!

**COLOR
NET
WORK®**

WE ARE COMMITTED

Sustainable by colour

Can colour be more than just a passing trend? It can: At least according to COLORNETWORK®. The interior design collective specialises entirely in sustainable colours and materials. We loved this idea so much that we included it in our luminaire collections. Certain luminaires are exclusively available in the “Sustained Colors”, so they can therefore be combined particularly well with other products of this type of colour. Incidentally, this is equally true of our standard collection of luminaires, which also blend harmoniously into the colourful world of “Sustained Colors”.

Kann Farbe mehr sein als nur ein flüchtiger Trend? Sie kann. Zumindest wenn es nach dem Interieur-Kollektiv COLORNETWORK® geht, das sich ganz auf nachhaltige Farben und Materialien spezialisiert hat. Eine Idee, die wir so toll fanden, dass wir sie in unsere Leuchtenkollektionen aufgenommen haben. Manche Leuchten sind exklusiv in den „Sustained Colors“ erhältlich und lassen sich so besonders gut mit anderen Produkten dieses Farbtyps kombinieren. Das funktioniert übrigens auch mit den Leuchten unserer Standardkollektion, die sich harmonisch in die Farbwelt der „Sustained Colors“ einfügen.



weverducre.com/sustainability-products



“*Live simple!:* the sustainable choice, an elegant off-white colour that never goes out of style.”

KOBE JACXSENS *Sales Director*



First it was a bottle,
now it *reduces noise*.



We go for a run with headphones, dance to loud electronic beats, and struggle to concentrate on a conversation with a customer in a crowded restaurant. In our modern world we are constantly surrounded by sound. It's no wonder that we sometimes long for silence. Especially when we want to withdraw, work undisturbed, or have important conversations. We prefer to do all this in rooms where we feel comfortable and which "sound" good to us. That's why pleasant acoustics are important in hotels, restaurants, and offices. They also play a major role in our well-being within our own four walls. What does this have to do with our lights? A lot. Because Wever & Ducré's new soft collection provides atmospheric light and beautiful design accents, and also better acoustics.

Wir gehen mit Kopfhörern laufen, tanzen zu lauten Electro-Beats und versuchen, uns im überfüllten Restaurant mühsam auf ein Kundengespräch zu konzentrieren. In unserer modernen Welt sind wir ständig von Geräuschen umgeben. Da ist es kein Wunder, dass wir uns manchmal nach der Stille sehnen. Vor allem, wenn wir uns zurückziehen, ungestört arbeiten oder wichtige Gespräche führen möchten. All das tun wir am liebsten in Räumen, in denen wir uns wohlfühlen. Und die für uns gut „klingen“. Deshalb ist eine angenehme Akustik nicht nur in Hotels, Restaurants oder Büros wichtig. Auch in den eigenen vier Wänden spielt sie für unser Wohlbefinden eine große Rolle. Was das mit unseren Leuchten zu tun hat? Viel. Denn die neue Wever & Ducré-Soft-Kollektion sorgt nicht nur für stimmungsvolles Licht und schöne Designakzente, sondern auch für eine bessere Akustik.


SOFT ACOUSTICS

How soft can we get?



weverducre.com/soft-acoustics





MORE PROJECT INSPIRATIONS ONLINE

Projects to fall in *love* with



weverducre.com/picture-gallery



“*Lighting design* is the process of integrating light into the elements of architecture.”

SAM REYNAERT *Team Lead Lighting Design*

IT IS THE MEANS OF EXPRESSING THE DESIRED FUNCTIONAL AND AESTHETIC CHARACTER OF A SPACE



The principles of *lighting design*

How we perceive a room and whether we feel comfortable in it depends strongly on the right lighting. The lighting mood, and thus the atmosphere of a room, should always be adapted to its function. So one of the most important questions is: What do I want to use it for? For working and playing, or rather for retreating and relaxing? Already decided? Perfect, then you can start planning. No idea where to start? Then simply click through our *Lightguide*, where we have summarised all the important basics for you.

Wie wir einen Raum empfinden und ob wir uns darin wohlfühlen, hängt auch von der richtigen Beleuchtung ab. Daher sollte man die Lichtstimmung und damit auch die Atmosphäre eines Raumes immer an seine Funktion anpassen. Eine der wichtigsten Fragen lautet also: Wofür möchte ich ihn nutzen? Zum Arbeiten und Spielen oder doch eher zum Zurückziehen und Entspannen? Ist dieser Punkt einmal geklärt, kann man eigentlich schon mit der detaillierten Planung loslegen. Noch keine Idee, womit Sie beginnen sollen? Dann klicken Sie sich einfach mal durch unseren *Lightguide*. Hier haben wir alle wichtigen Basics für Sie zusammengefasst.



weverducre.com/basic-lightguide



READY TO GET STARTED?

Light not only influences our mood, but also our perception. And this applies to every single room. That's why very distinct criteria are key when it comes to lighting the living room, bedroom, or dining room. Find out what these criteria are in our *Space Lightguide*.

Licht beeinflusst schließlich nicht nur unsere Stimmung, sondern auch unsere Wahrnehmung. Und das in jedem einzelnen Raum. Deshalb kommt es bei der Beleuchtung von Wohn-, Schlaf- oder Esszimmern auf ganz unterschiedliche Kriterien an. Und genau die möchten wir Ihnen mit unserem *Space Lightguide* verraten.




weverducre.com/guide-spaces

HOW TO CREATE A LIGHTING PLAN

Be your own *designer*

An old industrial loft with high ceilings and brick walls, or a modern new build with impressive, understated, minimalist elements? Wherever you choose to live is essential when planning your lighting. Therefore, completely different rules apply to existing buildings or buildings undergoing renovation than to a newly built home. So before you start planning the lighting, you should first analyse your home room by room. Our *Lightguide* helps you figure out what is important and which five steps you need to take to create your own personal lighting plan. Step-by-step and super easy.


Ein altes Industrie-Loft mit hohen Räumen und Backsteinwänden oder doch lieber ein moderner Neubau, der vor allem mit zurückgenommenen, minimalistischen Elementen überzeugt – wofür auch immer wir uns beim Wohnen entscheiden, ist auch für die Planung der Beleuchtung wesentlich. So gelten für existierende oder in Renovierung befindliche Gebäude ganz andere Regeln als bei einer Wohnung, die gerade neu gebaut wurde. Bevor es mit der Lichtplanung losgeht, sollten Sie Ihren Wohnbereich also erst einmal Raum für Raum analysieren. Worauf es dabei ankommt und mit welchen 5 Steps man zu seinem individuellen Lichtplan kommt, zeigen wir Ihnen in unserem *Lightguide*. Step-by-Step und supereasy.

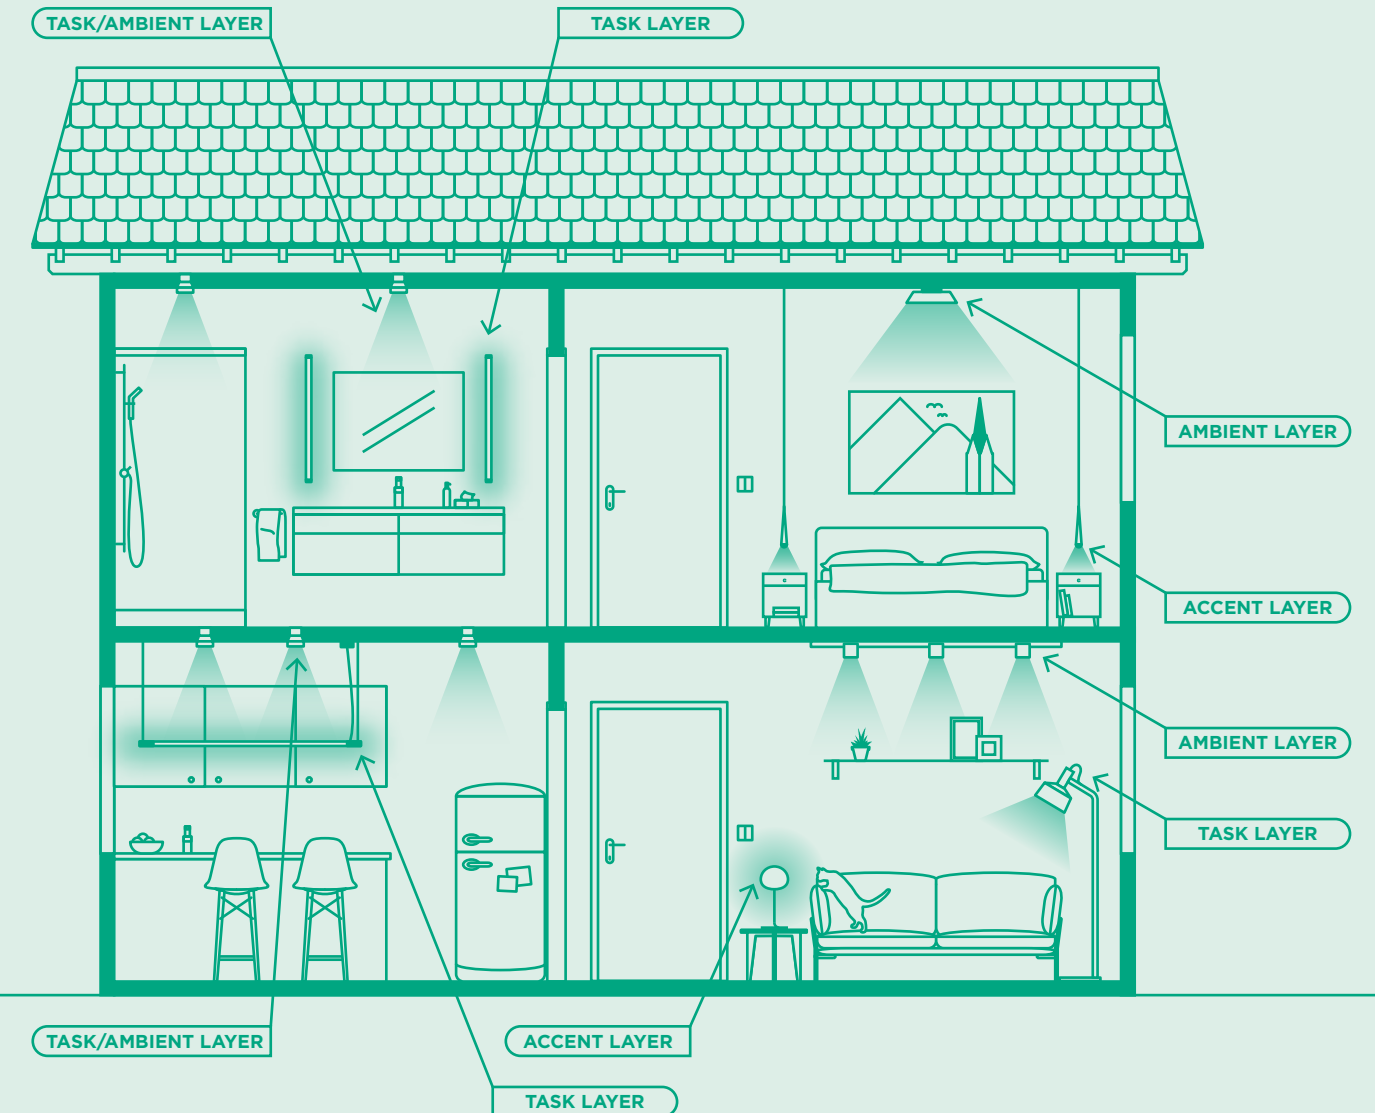

WE ARE MORE THAN ONE

Have you discovered our family icon? Yay! Then your favourite luminaire is available in at least three variants.

Sie haben unser Family-Icon entdeckt? Yey! Dann ist Ihre Lieblingsleuchte in mindestens drei Varianten erhältlich.

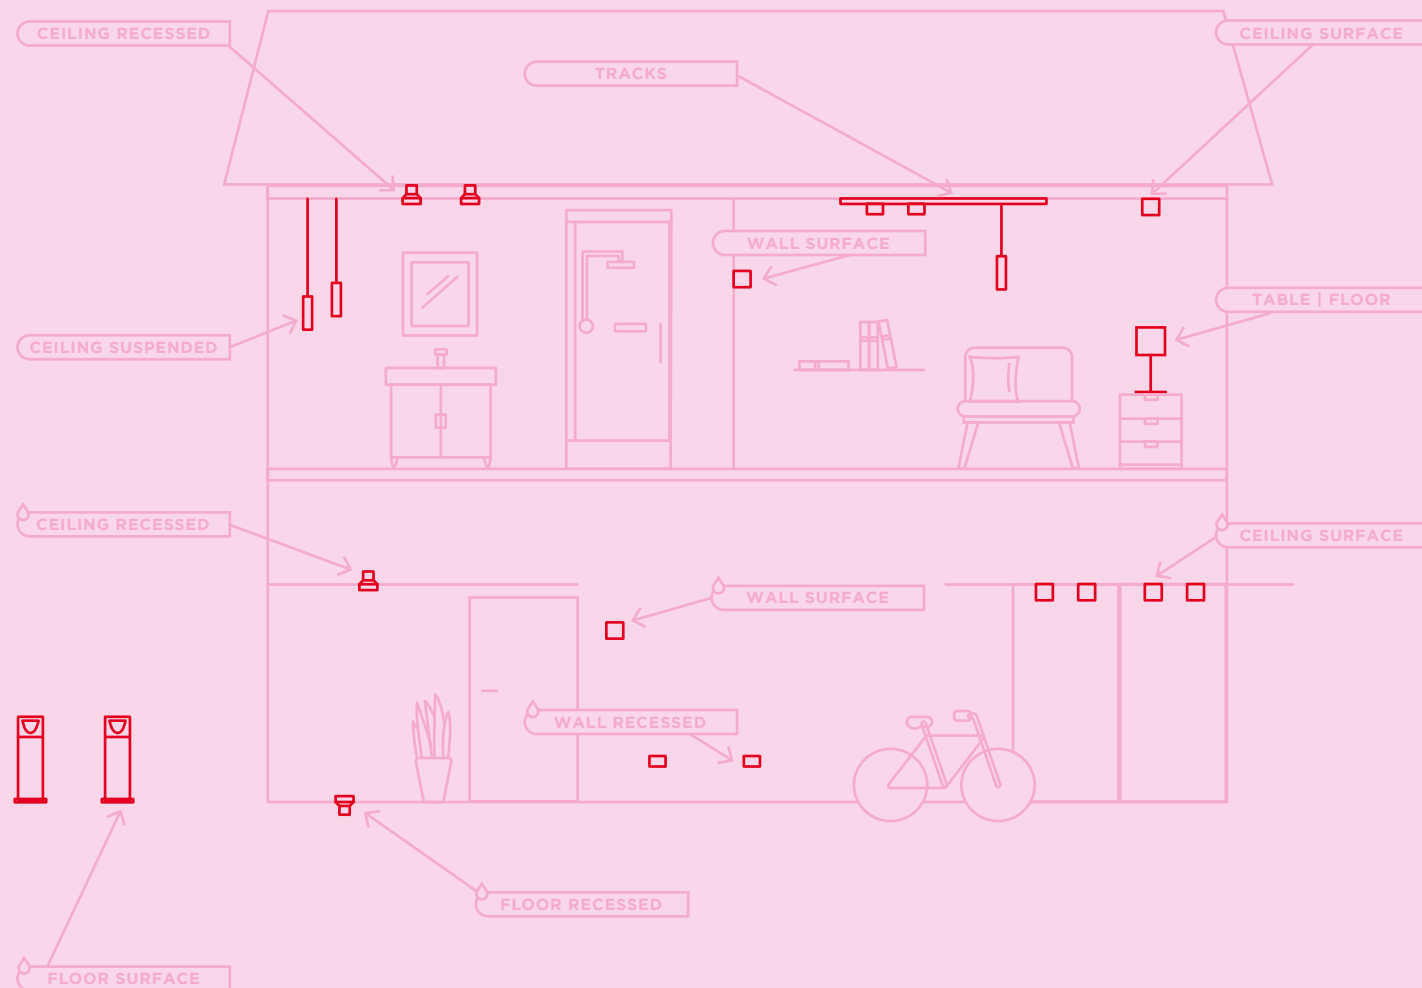

Have you fallen in love with a design so much that you wish you were surrounded by it all the time? No problem. Just take a quick look to see if the family icon is there and there's nothing standing in the way of your wish. After all, lights with this icon are available in at least three variants. In this way, rooms can be designed in a completely uniform style. By the way: Of course you can also pursue your need for harmony outdoors. Our outdoor variants make it possible.

Sie haben sich so sehr in ein Design verliebt, dass Sie es am liebsten ständig um sich hätten? Kein Problem. Einfach kurz nachsehen, ob Sie das Family-Icon entdecken, und schon steht Ihrem Wunsch nichts mehr im Wege. Schließlich sind Leuchten mit dieser Kennung in mindestens drei Varianten erhältlich. So lassen sich Räume in einem ganz einheitlichen Stil gestalten. Übrigens: Ihrem Harmoniebedürfnis können Sie natürlich auch im Außenbereich nachgehen. Unsere Outdoor-Varianten machen's möglich.

WE THOUGHT THAT

Three of us is a *product family*



PRODUCT FAMILIES



CEILING RECESSED



CEILING SURFACE



TRACKS



CEILING SUSPENDED



WALL RECESSED



WALL SURFACE



TABLE | FLOOR



CEILING RECESSED



CEILING SURFACE



WALL RECESSED



WALL SURFACE



















































































FLOOR RECESSED




FLOOR SURFACE


Highlight families

CENO 34 – 35	 SEMI-RECESSED 119	 CEILING 227	 ON STREX 303	 FORT ON 3-PHASE TRACK 353	 WALL 513			
MATCH	 RECESSED 57	 SEMI-RECESSED 113	 CEILING 223	 ON STREX 307	 SUSPENDED 407	 SNOOZE 623	 WALL 515	 FLOOR 659
PIRRO 36 – 37	 RECESSED 93	 CEILING 205	 ON 1-PHASE TRACK 339	 SYSTEM 361				
TRACE	 CEILING 201	 SPIN 253	 GRID 257	 SUSPENDED 399	 CHANDELIER 373	 WALL 517	 SLIM 521	
FINLIN 44 – 45	 CEILING 277	 SUSPENDED 385	 WALL 609	 WALL ROUND 613	 FLOOR 657			
ODREY	 ON STREX 323	 ON 1-PHASE TRACK 345	 SUSPENDED 461	 MULTI 461	 WALL 525			
CLEA 48 – 49	 SURFACE 271	 SUSPENDED 483	 MULTI 483	 WALL 571				

FIL	 CEILING 251	 SUSPENDED 383	 WALL 615					
PERLEZ 46 – 47	 SEMI-RECESSED 155	 SURFACE 279	 SPIN 255	 GRID 259	 WALL 635	 MIRROR CLIP 637		
ROOMOR 38 – 39	 OFFICE CEILING 275	 OFFICE ON TRACK 357	 SUSPENDED 445	 OFFICE SUSPENDED 451	 WALL 561	 TABLE 653	 FLOOR 665	
DRO 40 – 41	 CEILING 263	 ON TRACK 341	 SUSPENDED 413	 WALL 557	 TABLE 649	 TABLE / FLOOR 647	 FLOOR 661	
MIRRO	 CEILING 267	 CEILING SOFT 269	 SUSPENDED 431	 SUSPENDED SOFT 433	 WALL 581	 WALL SOFT 585	 TABLE 651	 FLOOR 663
WIRO	 CEILING 265	 CONE 417	 WIRO 417	 DIAMOND 423	 GLOBE 427	 WALL 569		
J.J.W. 42 – 43	 CEILING 273	 SUSPENDED 437	 SUSPENDED 439	 WALL 573	 WALL 577			

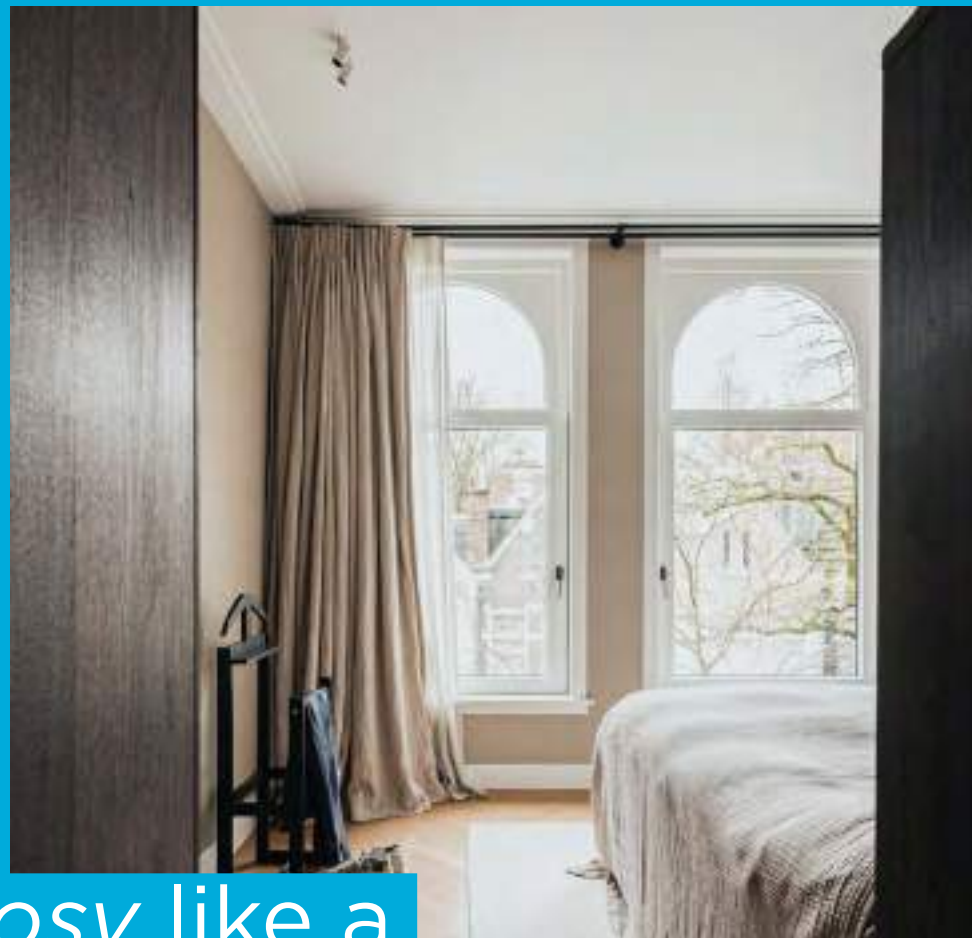

Cosy like a
Sunday morning.

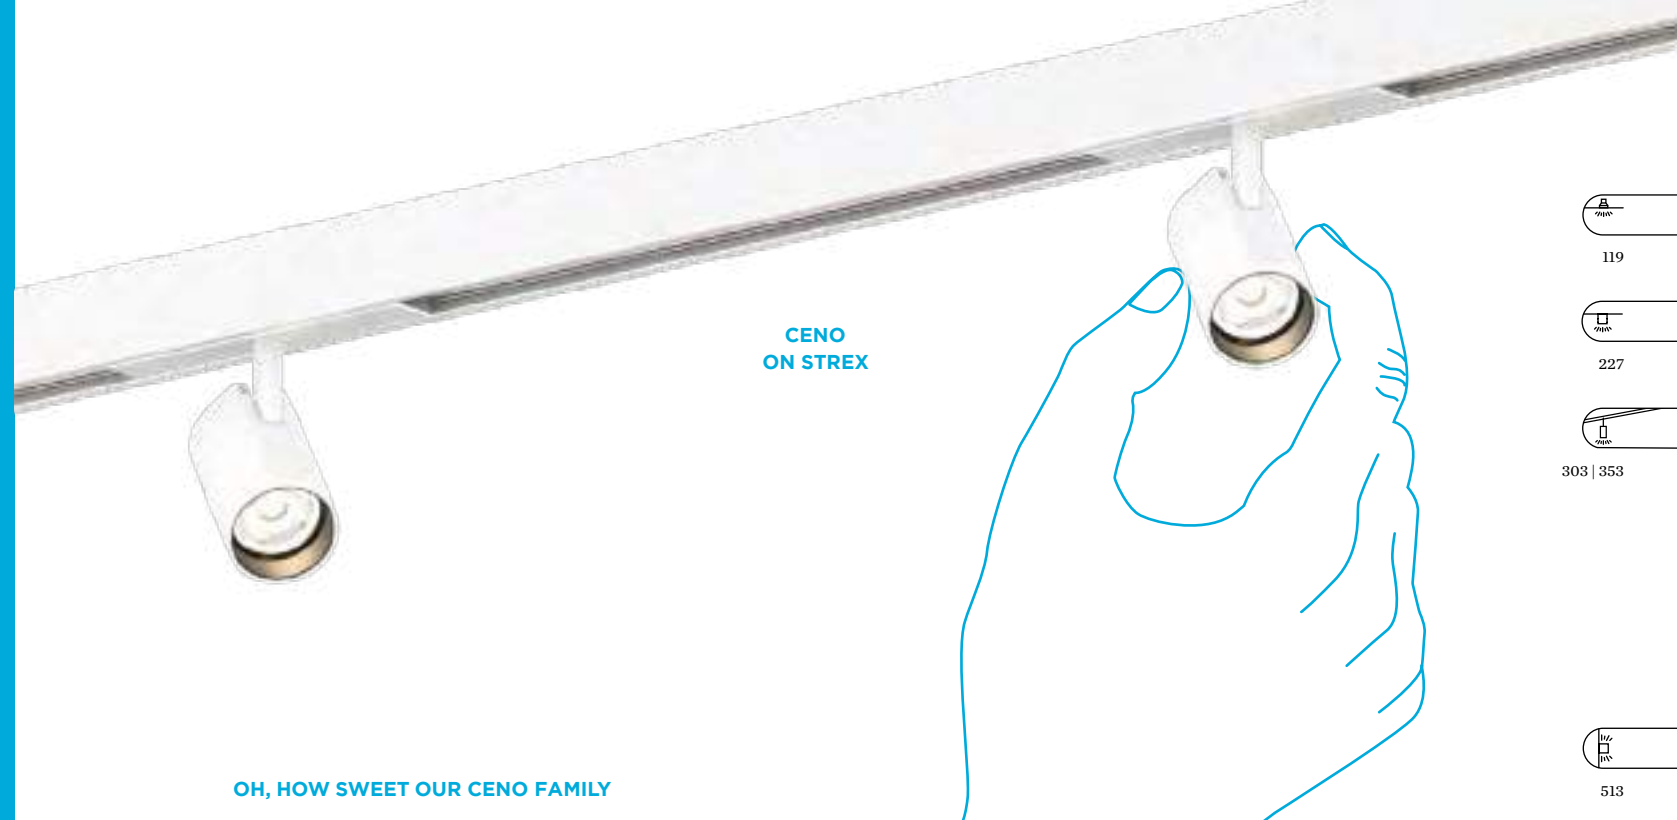

OH, HOW SWEET OUR CENO FAMILY

Small spots, massive impact

The spots of the CENO family being small and inconspicuous has nothing to do with shyness. Our designers wanted to create a range of luminaires that would effortlessly make even tiny or winding spaces shine, without taking up much space. Perfectly done. That's why our CENOs are also available in many surface-mounted and recessed versions and even as insets for our STREX system. Are you looking for a discreet wall luminaire? Then we recommend the Wall Edition with indirect light. Like all CENOs, it is also available in many colours.



weverducre.com/ceno

Dass die Spots der CENO-Familie so dezent sind, hat nichts mit Schüchternheit zu tun. Unsere Designer wollten einfach nur Leuchten entwerfen, die selbst kleine oder verwinkelte Räume mühelos zum Strahlen bringen. Deshalb gibt's unsere CENOs auch in vielen Auf- und Einbauvarianten und sogar als Insets für unser STREX-System. Sie suchen nach einer dezenten Wandleuchte? Dann empfehlen wir die Wall Edition mit indirektem Licht. Auch sie ist, wie alle CENOs, in vielen Farben erhältlich.



119



227



303 | 353



513



PIRRO 4.0
OPAL | SPOT
ON 1-PHASE TRACK

PERFECT ANGLES WITH THE PIRRO FAMILY


We love *sharp lines*

Especially when they look as stunning as the PIRRO family. That's why the Bauhaus-style light is one of our absolute favourites, both in the elegant recessed or surface-mounted variant, and also as a flexible track system. How does it work? Simply assemble SPOT or OPAL insets as a SYSTEM on the prefabricated track to create a small work of art on the ceiling. Want even more creative design options? Then you can combine the various insets with a track or bring even more light into the room with the PIRRO petit multi-spot.



weverducre.com/pirro

Vor allem, wenn sie so toll aussehen wie bei der PIRRO-Family. Deshalb gehört die im Bauhaus-Stil designte Leuchte auch zu unseren absoluten Favourites. Und zwar nicht nur in der formschönen Ein- oder Aufbauvariante, sondern auch als flexibles Schienensystem. Wie's funktioniert? Einfach SPOT- oder OPAL-Insets als SYSTEM auf der vorgefertigten Schiene zusammenstellen und schon entsteht ein kleines Kunstwerk an der Decke. Noch mehr kreative Gestaltungsmöglichkeiten gewünscht? Dann können Sie die verschiedenen Insets auch mit einer Stromschiene kombinieren oder mit dem Multi-Spot PIRRO petit noch mehr Licht in den Raum bringen.

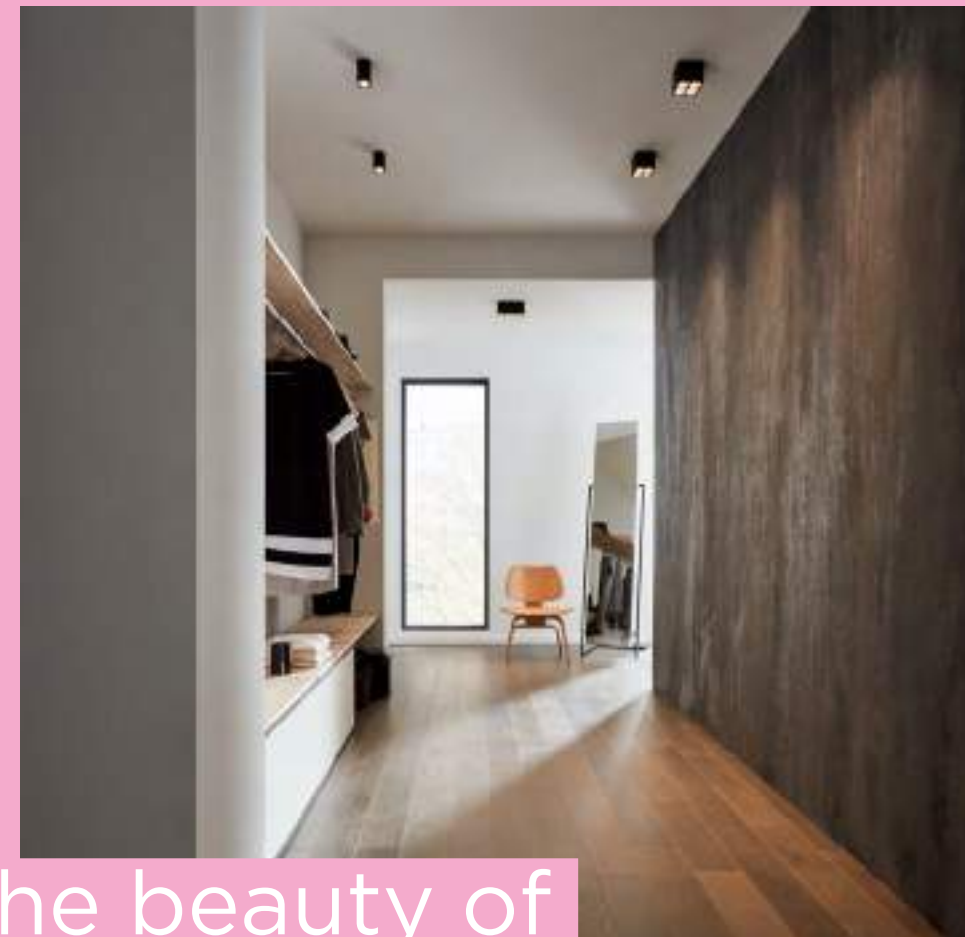

The beauty of
simplicity.



91



203



339 | 361



Invite the
ROOMOR *family*
for dinner.

ROOMOR FAMILY HAS IT


A true *all-rounder*

The rumours are true: ROOMOR is a lamp that can change its appearance faster than a chameleon. And all it takes is a few simple steps. Just choose the shape and colour and combine them to your heart's content. This allows ROOMOR to be transformed into everything from a minimalistic floor lamp to an opulent suspended luminaire or discreet table lamp. And because ROOMOR can be fully adapted to its surroundings when it comes to materials, all of the shade designs are offered in powder-coated aluminium and some also in finely textured felt. And to make things a little more fun in the office, ROOMOR is now also available as a glare-free office light with an UGR value of ≤ 19 . Nothing could be more flexible.



weverducre.com/roomor

ROOMOR OFFICE
CABLE SUSPENDED

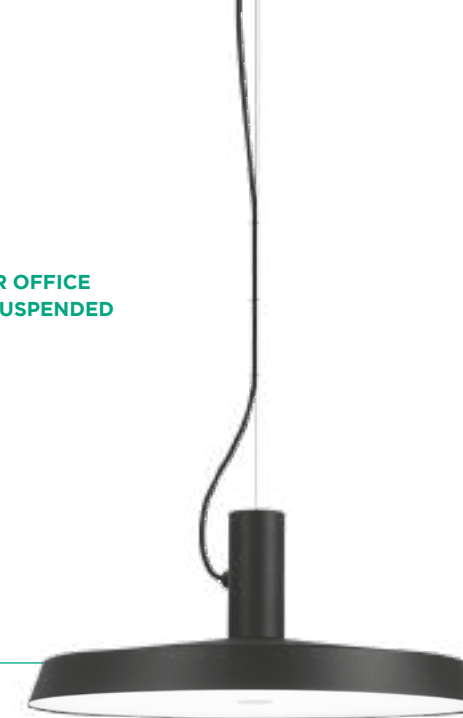

275



357



445 | 451



561



653 | 665

Sie können den Gerüchten ruhig glauben: ROOMOR ist eine Leuchte, die ihre Optik schneller wechselt als ein Chamäleon. Und das mit nur wenigen Handgriffen. Einfach Form und Farbe auswählen und loskombinieren. So wird aus ROOMOR mal eine minimalistische Stehlampe, mal eine opulente Hängelampe und mal eine dezente Tischlampe. Und weil sich ROOMOR auch in puncto Material ganz ihrer Umgebung anpasst, sind alle Schirmformen in pulverbeschichtetem Aluminium und manche auch in fein strukturiertem Filz erhältlich. Und damit es auch im Büro etwas abwechslungsreicher wird, gibt es ROOMOR nun auch als blendfreie Leuchte mit einem UGR-Wert ≤ 19 . Flexibler geht's nicht.



ANASTASIJA & MARTIN LESJAK, 13&9 DESIGN

Products with *emotional* added value

At Studio 13&9, Anastasiya and Martin Lesjak focus entirely on “transferring the creative energy of a brand to the product”. This approach is also reflected in all the collections that the Austrian designer team has designed exclusively for Wever & Ducré. DRO stands out in particular, where the designer duo has been able to take the fleeting beauty of a dewdrop and capture it permanently. But the source of inspiration for 13&9 does not just come from nature, but many other creative areas, like the arts, fashion, and architecture. It is a transdisciplinary approach, which is expressed in a particularly attractive manner in the MIRRO collection, designed together with the designer Sabrina Stadlober. The metallic, reflective surface of the luminaires allows both the viewer and the surroundings to be reflected at the same time. An artisan’s device, used in this instance by 13&9, to closely connect the user with the product. And it is just such details, in the pieces designed by 13&9, that draw the fascination of everyone.

Anastasiya und Martin Lesjak vom Studio 13&9 konzentrieren sich ganz darauf, „die kreative Energie einer Marke auf das Produkt zu übertragen“. Dieser Ansatz spiegelt sich auch in allen Kollektionen wider, die das österreichische Designerteam exklusiv für Wever & Ducré entworfen hat. Allen voran: DRO, mit der es den beiden Designern gelungen ist, die flüchtige Schönheit eines Taupfens dauerhaft einzufangen. Inspirieren lassen sich 13&9 aber nicht nur von der Natur, sondern auch von vielen anderen Kreativbereichen wie Kunst, Mode oder Architektur. Eine transdisziplinäre Herangehensweise, die bei der mit Designerin Sabrina Stadlober entworfenen Kollektion MIRRO besonders schön zum Ausdruck kommt. Gleichzeitig können sich Betrachter und Umgebung in der metallisch reflektierenden Oberfläche der Leuchten spiegeln. Ein gekannter Kunstgriff, mit dem 13&9 eine intensive Verbindung zwischen Benutzer und Produkt herstellen. Und genau das ist es auch, was die besondere Faszination aller von 13&9 entworfenen Objekte ausmacht.



weverducre.com/dro



Inspired by the *shapes* of nature.



263



341



413



557



647 | 661

Meet J.J.W. at
the club or your
favourite cafe.



Elegant and *timeless*

J.J.W. by JULES WABBES



Jules Wabbes (1919–1974), who had a penchant for finding new ideas at flea markets, must have had the same thought. It's no wonder people said that the Belgian architect and furniture designer had a unique eye for shapes and materials. And that is apparent in his countless designs, which still haven't gone out of fashion even today. A shining example is the chandelier, developed in the 1970s, whose futuristic, floral form is as much at home in a modern bar as in a posh hotel lobby.

So oder so ähnlich könnte Jules Wabbes (1919–1974) gedacht haben, der sich gerne auf Flohmärkten inspirieren ließ. Kein Wunder, dass man dem belgischen Architekten und Möbeldesigner einen ganz besonderen Blick für Formen und Materialien nachsagte. Dieser manifestiert sich in seinen zahlreichen Entwürfen, die bis heute nicht aus der Mode gekommen sind. Bestes Beispiel: Ein in den 1970er Jahren entworfener Kronleuchter, dessen futuristische, florale Form sich damals wie heute gleichermaßen perfekt in moderne Bars und edle Hotel-Lobbys einfügt.



weverducre.com/jjw

Jules Wabbes with one of his desks at the Royale Belge, Brussels, 1971,
©Wabbes Sofam, Brussels, 2017.

LESS IS MORE WITH THE FINLIN FAMILY

Follow the *line*

Admittedly, at first glance, the lights in the FINLIN family could also pass for modern sculptures. In reality, however, the delicate designs are made of wafer-thin aluminium tubes that appear to float almost weightlessly in the room. This creates a very fine, completely pared-back look that will make the hearts of design minimalists beat faster. FINLIN impresses both as a linear ceiling or suspended light and also as a round wall element that can customise even large areas. FINLIN is available in plain black and shimmering gold, and is now also available as a free-standing light.




weverducre.com/finlin

Zugegeben, auf den ersten Blick könnten die Leuchten der FINLIN-Familie auch als moderne Skulpturen durchgehen. In Wahrheit bestehen die filigranen Designs aber aus hauchdünnen Aluminiumrohren, die fast schwerelos im Raum zu schweben scheinen. So entsteht eine sehr feine, vollkommen reduzierte Optik, die vor allem das Herz von Design-Minimalisten höher schlagen lässt. Schließlich überzeugt FINLIN nicht nur als lineare Decken- oder Pendelleuchte, sondern auch als rundes Wandelement, mit dem sich selbst große Flächen ganz individuell gestalten lassen. Erhältlich ist FINLIN in schlichtem Schwarz und schimmerndem Gold und ab sofort auch als Stehleuchte.



FINLIN FLOOR

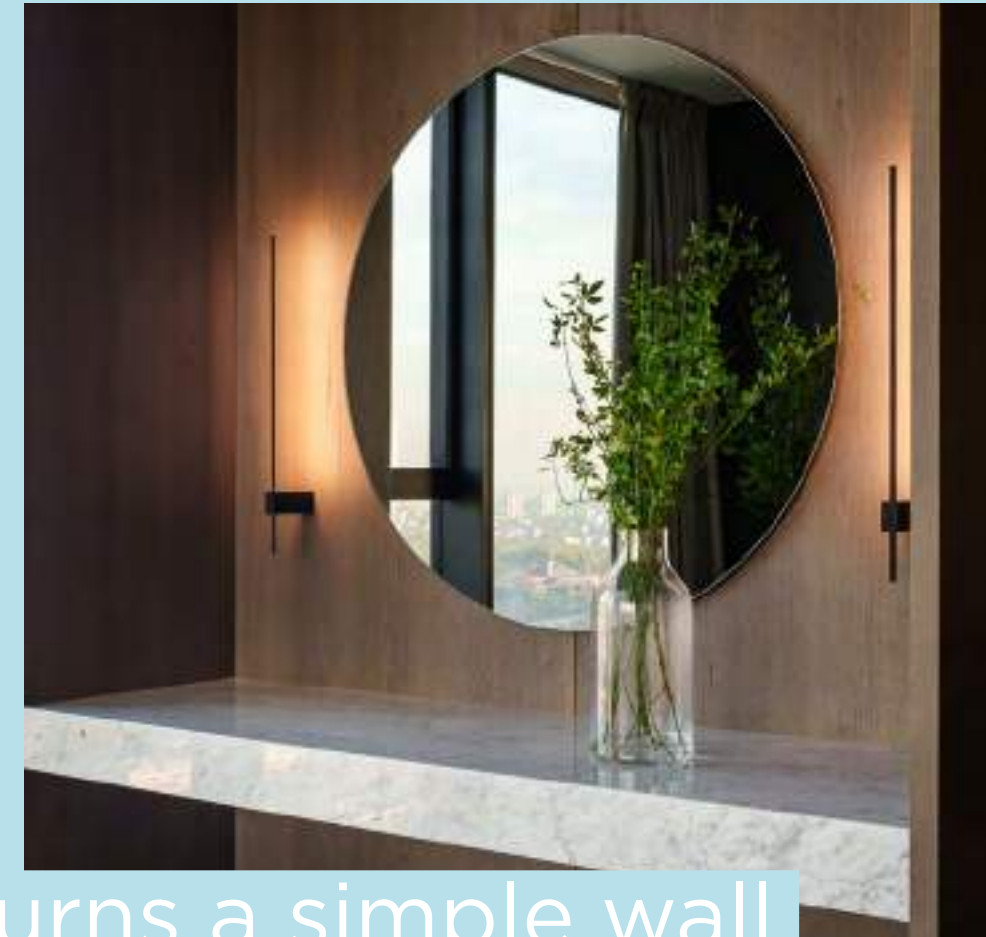

Turns a simple wall into a *piece of art*.



277



385



609



657



Let light
follow you.



PERLEZ's gentle light and soft, round shape is reminiscent of a small, shimmering pearl. And as befits a true favourite piece of jewellery, it can also be combined with an infinite number of styles – whether as a minimalist ceiling light or as an elegant clip on the edge of a mirror. PERLEZ's uniform light makes any room shine. Thanks to its IP44 certification, the round opal glass light is ideally protected against splashing water and thus can even be used in bathrooms.

Mit ihrem sanften Licht und der weichen, runden Form erinnert PERLEZ an eine kleine, schimmernde Perle. Und wie sich das für ein echtes Liebblingsschmuckstück gehört, lässt sie sich auch mit unendlich vielen Stilen kombinieren. Ob als minimalistische Deckenleuchte oder als formschöner Clip am Spiegelrand – mit ihrem gleichmäßigen Licht bringt PERLEZ jeden Raum zum Strahlen. Dank IP44-Zertifizierung ist die runde Opalglas-Leuchte nämlich optimal vor Spritzwasser geschützt und lässt sich so selbst im Badezimmer problemlos einsetzen.

PERLEZ BRIGHTENS UP EVERY ROOM

A true *gem*

What else does PERLEZ surprise us with? With SPIN and GRID, two unusual mounting variants that allow the light to be positioned completely independently of the power outlet. Do you want to adapt your lighting spontaneously to any situation? Then SPIN's swivelling arms make this a reality with just one simple adjustment. To illuminate larger areas such as the dining or living room table, PERLEZ is best combined with GRID, allowing four of the beautifully designed lights to shine from the ceiling.

Womit PERLEZ noch überrascht? Mit SPIN und GRID, zwei außergewöhnlichen Mounting-Varianten, mit denen sich die Leuchte ganz unabhängig vom Stromauslass positionieren lässt. Sie möchten Ihre Beleuchtung spontan an jede Situation anpassen? Dann ist das mit SPIN's schwenkbaren Armen mit nur einem Handgriff möglich. Für die Ausleuchtung größerer Flächen, wie zum Beispiel des Ess- oder Wohnzimmeres, kombiniert man PERLEZ am besten mit GRID und lässt so gleich vier der formschönen Leuchten von der Decke strahlen.



weverducre.com/perlez





CLEA 1.0 | 2.0

SOMETIMES THERE'S NOTHING LEFT TO ADD

A perfect circle

Design is at its best when colour and shape are in perfect harmony. As with the CLEA family, whose circular shade comes in three sizes and various colours. The special feature here is that the shades "feel jade!" and "live simple!" are part of the "Sustained Colors" line by COLORNETWORK®, which is fully committed to the sustainable definition of colour concepts. Entire interiors can thus be designed in the same tone or in matching colour families. It's great that the CLEA family is also part of this philosophy and shares the same inner values. It makes you want to have the beautifully designed lights, whose light sources emit a particularly soft light, in your home even more. After all, they can be used to create highly decorative highlights on walls and ceilings.



weverducre.com/clea

Design ist am schönsten, wenn Farbe und Form in perfektem Einklang stehen. Wie bei der CLEA-Family, deren kreisrunde Schirme in drei Größen und verschiedenen Farben zu haben sind. Das Besondere dabei: Die Nuancen „feel jade!“ und „live simple!“ gehören zu den „Sustained Colors“ von COLORNETWORK®, das sich ganz der nachhaltigen Definition von Farbkonzepten verschrieben hat. So können ganze Interieurs im selben Ton gestaltet werden. Schön, dass auch die CLEA-Family Teil dieser Philosophie ist und nicht nur mit außergewöhnlichem Design, sondern auch mit inneren Werten punktet. Da möchte man die formschönen Leuchten, deren Glaskörper ein besonders weiches Licht spenden, doch gleich noch lieber zu Hause haben. Schließlich lassen sich mit ihnen an Wand und Decke besonders dekorative Highlights setzen.



The calm way of showing style.



271



483



571

Indoor



A home is a place where we want to relax above all else. At the same time, a lot happens here. We play, cook, and, more and more often, work.

It's good to know that a modern LED system adapts flexibly to all these needs.

SPOT LIGHTS

	 <small>new</small>			
MATCH POINT 57	DEEP POINT 59	DEEP BIJOU 61	DEEP PETIT 63	DEEP 65
		 <small>new</small>		
DEEPER 67	DEEP ADJUST PETIT 69	DEEP ADJUST PETIT TRIMLESS 69	DEEP ADJUST 71	DEEP ADJUST TRIMLESS 75
		 <small>new</small>		
DEEP ADJUST FORT 79	SPINEO 81	RONY POINT 83	RONY 85	RON 87
		 <small>new</small>		
PIRRO 93	PLANO PETIT 97	PLANO 99	STRANGE PETIT TRIMLESS 101	STRANGE TRIMLESS 103
				
SNEAK TRIMLESS 107				SNEAK 105

SEMI RECESSED

 <small>new</small>				
LECA 109	MATCH 113	MATCH STICK 117	CENO 119	BLIEK PETIT 123
				
BLIEK PETIT TRIMLESS 123	BLIEK ROUND 127	BLIEK SQUARE 129	RUVI 131	
		 <small>new</small>		
DEEP POINT IP44 135	DEEP BIJOU IP65 137	DEEP PETIT IP65 139	DEEP IP65 IP44 141	DEEPER IP44 143
			 <small>new</small>	 <small>new</small>
MATCH POINT IP44 145	TAIO IP65 147	RINI SNEAK IP44 149	LUNA ROUND IP44 151	LUNA SQUARE IP44 151
 <small>new</small>				
PERLEZ IP44 155	MIRBI IP44 1.0 157	MIRBI IP44 2.0 157	CITY IP44 159	

IP-RATED

How deep is your deep?

DEEP

FIX



point 1.0
LED
p. 59



bijou 1.0
LED
p. 61



bijou 2.0
LED
p. 61



petit 1.0
LED
p. 63



1.0
LED | MR16 | PAR16
p. 65




point IP44 1.0
LED
p. 135



bijou IP65 1.0
LED
p. 137




petit IP65 1.0
LED
p. 139




IP65 | IP44 1.0
LED | MR16 | PAR16
p. 141

DEEP ADJUST


ADJUSTABLE




petit 1.0
LED
p. 69




petit trimless 1.0
LED
p. 69




1.0
LED | MR16 | PAR16
p. 71



trimless 1.0
LED | MR16 | PAR16
p. 75




2.0
LED | PAR16
p. 73




fort 1.0
LED
p. 79

DEEPER

FIX



1.0
LED | MR16 | PAR16
p. 67



IP44 1.0
LED | MR16 | PAR16
p. 143


DEEP CONNECTIONS

DEEP and DEEPER are classic downlights and send their light beam straight down. Perfect for any room, be it a hallway or living room. But the recessed lights have so much more to offer. DEEP and DEEPER have an IP44 variant with splash protection, and for DEEP we even have IP65 variants with protection against low pressure water jets. This means you can also mount the starry sky in your bathroom. Incidentally, DEEP ADJUST and DEEP ADJUST petit are available in a trimless version, which seem like they are virtually invisible as they disappear into your ceiling.

DEEP und DEEPER sind klassische Downlights und geben ihren Lichtstrahl gerade nach unten ab. Perfekt für alle Räume, egal ob Flur oder Wohnzimmer. DEEP und DEEPER gibt's als IP44-Variante spritzwassergeschützt und DEEP sogar als IP65-Varianten strahlwassergeschützt. Da kann man sich den Sternenhimmel auch ins Badezimmer montieren. Übrigens: DEEP ADJUST und DEEP ADJUST petit gibt's als Trimless-Variante, die fast unsichtbar in der Decke verschwindet.

DEEP ADJUST

ASYM



asym 1.0
LED | PAR16
p. 77



DON'T BE SHY

Want to place your Ming vase in the right light? Then the swivelling spotlights from the DEEP range are the ideal solution for you. This means your vase can be moved around and still remain perfectly lit. Simply readjust by hand. Do you actually have a fresco mural or a special surface structure? Then DEEP ADJUST asym is the perfect solution: The consistent wall washer effect will certainly WOW your guests. Guaranteed.

Sie möchten Ihre Ming-Vase ins rechte Licht rücken? Dann sind die schwenkbaren Spots der DEEP-Familie die perfekte Lösung für Sie. Damit kann die Vase nämlich auch mal wandern und sie bekommt trotzdem wieder das perfekte Licht. Einfach händisch nachjustieren. Sie haben tatsächlich ein Wandfresko oder eine besondere Oberflächenstruktur? Dann ist DEEP ADJUST asym die perfekte Lösung: Der gleichmäßige Wallwasher-Effekt wird Ihren Gästen ein WOW entlocken. Garantiert.



weverducre.com/deep



MATCH point

Ceiling recessed



reddot winner 2023



223



307 | 321

As awarded by The Chicago Athenaeum: Museum of Architecture and Design

407



ø45



ø45



ø26

1.0

LED COB 5W | 250mA | 18V aluminium

IP20 32° SDCM2 L80|50K 0.06kg

wire springs 40-41 68 4-25

1.0 IP44

LED COB 5W | 250mA | 18V aluminium

IP44 32° SDCM2 L80|50K 0.06kg

wire springs 40-41 68 4-25

1.0 TRIMLESS

LED COB 5W | 250mA | 18V aluminium

IP20 32° SDCM2 L80|50K 0.08kg

45-47 60 4-26

	CODE
	191161W_
	191161B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	320	>90	3
3000K	350	>90	5

ALWAYS USE

driver | 250mA

	CODE
5W dim	90226201
13W DALI*	90246501

*revision opening required
more options and specs on page 806

	CODE
	191261W_
	191261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	300	>90	3
3000K	330	>90	5

ALWAYS USE

driver | 250mA

	CODE
5W dim IP20	90226201
13W DALI IP20*	90246501

*revision opening required
more options and specs on page 806

	CODE
	191861B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	270	>90	3
3000K	300	>90	5

ALWAYS USE

driver | 250mA

	CODE
5W dim	90226201
13W DALI	90246501

revision opening required
more options and specs on page 806



1.0

LED COB 4W | 250mA | 18V
aluminium

IP20 A 32° SDCM2 L80|50K 0.06kg

wire springs ⌀40-41 1.68 4-25

	CODE
	185261W_
	185261M_
	185261Q_
	185261B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	390 >90	3
3000K	430 >90	5

ALWAYS USE

driver | 250mA

	CODE
5W dim	90226201
13W DALI*	90246501

*revision opening required
more options and specs on page 806



DEEP point

Ceiling recessed

new

1.0 IP44

LED COB 4W | 250mA | 18V
aluminium

IP44 A 32° SDCM2 L80|50K 0.06kg

wire springs ⌀40-41 1.68 4-25

	CODE
	185161W_
	185161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	370 >90	3
3000K	410 >90	5

ALWAYS USE

driver | 250mA


	CODE
5W dim IP20	90226201
13W DALI IP20*	90246501

*revision opening required
more options and specs on page 806



DEEP bijou

Ceiling recessed



1.0

LED COB 4W | 250mA | 17V
aluminium

IP20 31° SDCM2 L80|50K 0.07kg

wire springs 50-52 85 4-25

2.0

2x LED COB 4W | 250mA | 34V
aluminium

IP20 31° SDCM2 L80|50K 0.15kg

wire springs 50-52x100-104 67 4-25

	CODE
	165161W_
	165161M_
	165161G_
	165161Q_
	165161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	450 >90	5

	CODE
	165261W_
	165261M_
	165261G_
	165261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >90	3
3000K	2x450 >90	5

ALWAYS USE

driver | 250mA

	CODE
5W dim	90226201
13W DALI	90246501



more options and specs on page 806

ALWAYS USE

driver | 250mA | only 1x needed

	CODE
10.5W dim	90226501
13W DALI	90246501

more options and specs on page 806



BLADE SPRING VERSIONS ONLINE


weverducre.com/more-deep-bijou



DEEP petit

Ceiling recessed

new



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 31° SDCM2 L80|50K 0.04kg

wire springs ⌀68-70 11.57 4-23

1.0 IP65

LED COB 6W | 350mA | 17V
aluminium

IP65 31° SDCM2 L80|50K 0.04kg

wire springs ⌀68-70 11.60 4-25

CODE
153561W_
153561S_
153561M_
153561G_
153561Q_
153561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	615 >90	3
3000K	650 >90	5
2000-3000K 16V	440 >90	9

ALWAYS USE

driver | 350mA

CODE
6W
10W dim
14W DALI

more options and specs on page 806

CODE
153761W_
153761B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	610 >90	5

ALWAYS USE

driver | 350mA

CODE
6W IP20
10w dim IP20
17W IP68*


*revision opening required
more options and specs on page 806





DEEP

Ceiling recessed



1.0 LED

LED COB 6,9W | 350/500mA | 17V
aluminium

IP20 34° SDCM2 L80I55K 0,15kg

wire springs 76-79 90 4-27

CODE	
184261W_	184261W_
184261S_	184261S_
184261M_	184261M_
184261G_	184261G_
184261B_	184261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	575/770	>90	5
4000K	615/825	>90	7
2000-3000K	380/560	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
aluminium

IP20 0,11kg

wire springs 76-79 90 4-27

CODE	
112110W0	112110W0
112110S0	112110S0
112110M0	112110M0
112110G0	112110G0
112110B0	112110B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701

specs on page 810



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0,12kg

wire springs 76-79 115 4-27

CODE	
112120W0	112120W0
112120S0	112120S0
112120M0	112120M0
112120G0	112120G0
112120B0	112120B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



BLADE SPRING VERSIONS AND
MORE BEAM ANGLES ONLINE

weverducre.com/more-deep

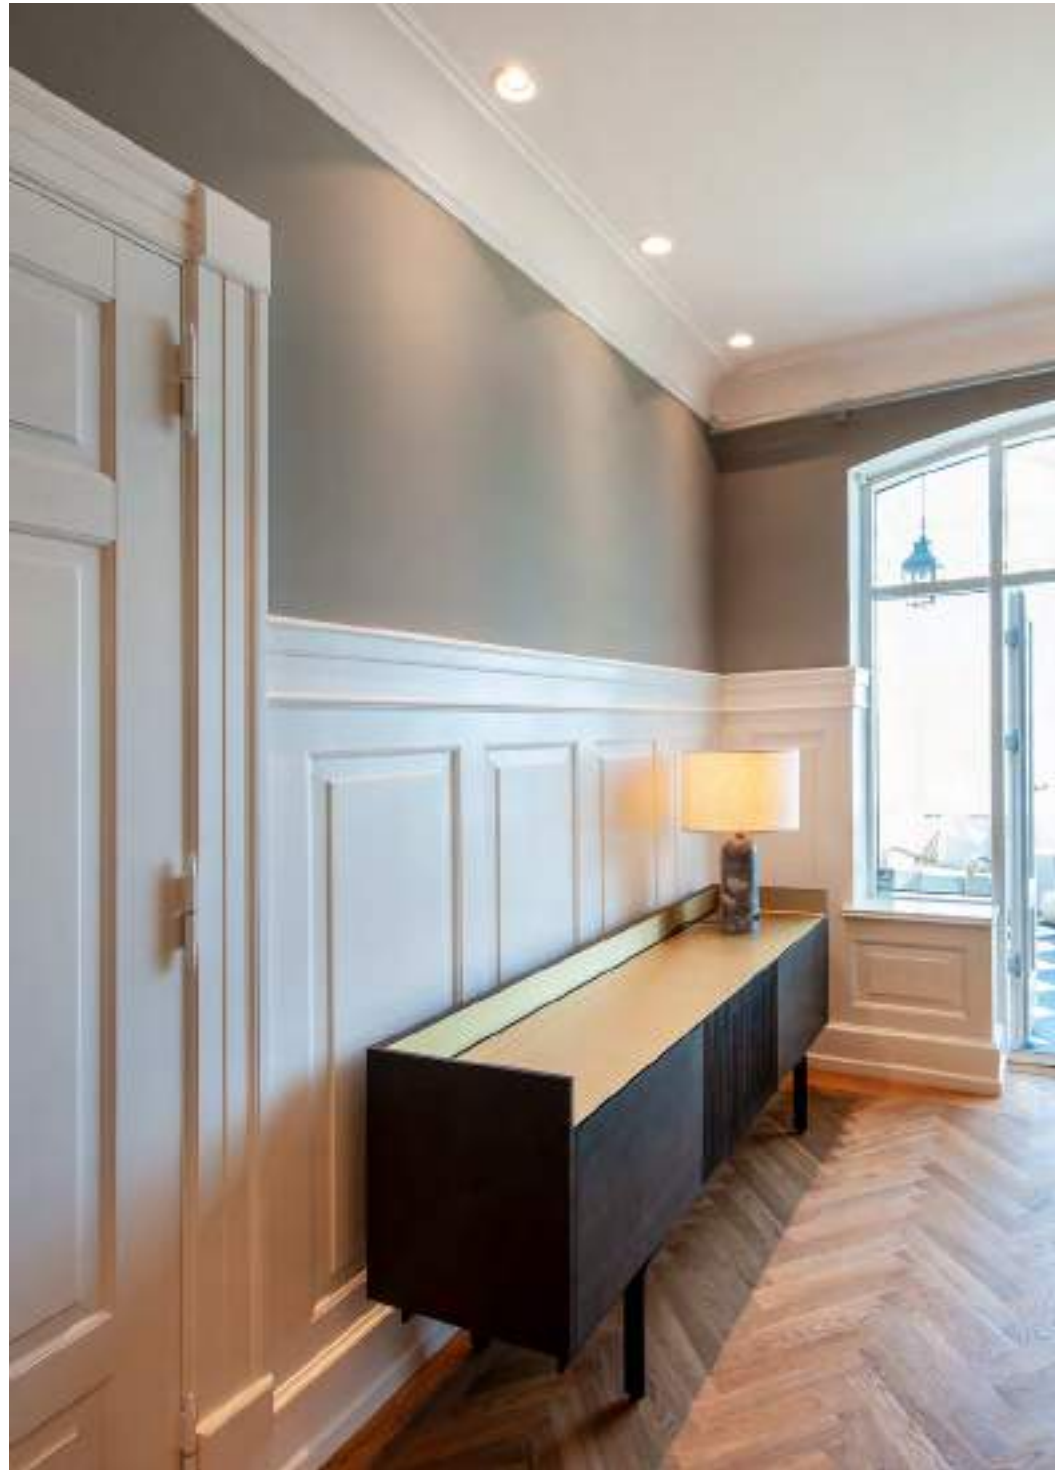

DEEPER

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 34° SDCM2 L80/55K 0.17kg

wire springs 76-79 90 4-38

CODE
152361W_
152361S_
152361G_
152361Q_
152361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	505/685 >90	3
3000K	550/740 >90	5
2000-3000K	380/560 >90	9


LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V aluminium

IP20 0.11kg

wire springs 76-79 100 4-38


CODE
152110W0
152110S0
152110G0
152110Q0
152110B0

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701

specs on page 810



1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0.15kg

wire springs 76-79 120 4-38

CODE
152120W0
152120S0
152120G0
152120Q0
152120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5




BLADE SPRING VERSIONS AND MORE BEAM ANGLES ONLINE
weverducre.com/more-deeper



DEEP ADJUST petit

Ceiling recessed

new



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°/355° 31° SDCM2 L70|50K 0.05kg

wire springs ⌀68-70 65 4-23

CODE	153661W_
153661M_	
153661G_	
153661Q_	
153661B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 16V	440 >90	9

LED module 20 years replaceability

ALWAYS USE

driver | 350mA

CODE	90213303
6W	
10W dim	90223406
14W DALI	90243501

more options and specs on page 806

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-35°/360° 31° SDCM2 L70|50K 0.07kg

CODE	153461W_
153461B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K 16V	440 >90	9

LED module 20 years replaceability

ALWAYS USE



alu plasterkit ⌀78-80 65 12,5, 15, 20, 25

CODE	90017210

driver | 350mA

CODE	90213303
6W	
10W dim	90223406
14W DALI	90243501

more options and specs on page 806



BLADE SPRING VERSIONS AND
MORE BEAM ANGLES ONLINE

weverducre.com/more-deep-adjust-petit



DEEP ADJUST

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°|355° A 34° SDCM2 L80|55K 0.17kg

wire springs 86-89 11.90 4-23

CODE	
184361W	
184361S	
184361M	
184361G	
184361Q	
184361B	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/715 >90	3
3000K	575/775 >90	5
4000K	620/830 >90	7
2000-3000K	380/560 >90	9


LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V aluminium

IP20 0°-35°|355° 0.17kg

wire springs 86-89 11.90 4-23

CODE	
112310W0	
112310S0	
112310M0	
112310G0	
112310Q0	
112310B0	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5


specifications on page 810

ALWAYS USE

driver | 12V

	CODE
10W dim	90221401
25W dim	90221701

specifications on page 810



1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°|355° 0.21kg

wire springs 86-89 11.15 4-23

CODE	
112320W0	
112320S0	
112320M0	
112320G0	
112320Q0	
112320B0	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

specifications on page 810

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



BLADE SPRING VERSIONS AND MORE BEAM ANGLES ONLINE

weverducre.com/more-deep-adjust




back



DEEP ADJUST

Ceiling recessed



2.0 LED

2x COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°/355° ⚡ 34° SDCM2 L80/55K 0.61kg

wire springs 89x172-178 90 4-23

	CODE
White	184761W_
Black	184761B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x530/715 >90	3
3000K	2x575/775 >90	5
4000K	2x620/830 >90	7
2000-3000K	2x380/560 >90	9


LED module 20 years replaceability

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
24W DALI	90244701

more options and specs on page 807



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°/355° 0.42kg

wire springs 89x172-178 115 4-23

	CODE
White	112720W0
Black	112720B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K 460lm		901228W3
2700K 437lm		901228B3
3000K 500lm		901228W5
3000K 457lm		901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



DEEP ADJUST trimless

Ceiling recessed



1.0 LED

LED COB 6,9W | 350/500mA | 17V aluminium

IP20 0°-35°|355° A-34° SDCM2 L80|55K 0.23kg

CODE
184861W_
184861G_
184861B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/715 >90	3
3000K	575/775 >90	5
4000K	620/830 >90	7
2000-3000K	380/560 >90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 105-110 95 12,5, 15, 20, 25

CODE 90017209

driver | 500mA

CODE
10W 90214406
10W dim 90224403
24W DALI 90244701

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V aluminium

IP20 0°-35°|355° 0.17kg

CODE
112810W0
112810G0
112810B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more options and specs on page 810

ALWAYS USE


alu plasterkit 105-110 95 12,5, 15, 20, 25

CODE 90017209

driver | 12V

CODE
10W dim 90221401
25W dim 90221701

more options and specs on page 810



1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°|355° 0.21kg

CODE
112820W0
112820G0
112820B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

more options and specs on page 810

ALWAYS USE

alu plasterkit 105-110 120 12,5, 15, 20, 25

CODE 90017209

driver | 12V

CODE
PAR16 6.5W GU10 phase-cut dim

more options and specs on page 810



MORE BEAM ANGLES ONLINE

weverducre.com/more-deep-adjust-trimless



HEADQUARTERS OF THE COUNCIL OF THE OCCITANIE ORDER OF ARCHITECTS | ISTHME ARCHITECTURE & URBANISME
TOULOUSE | FRANCE

DEEP ADJUST asym

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°/355° SDCM2 L80|55K 0.25kg

wire springs ⌀87-88 ∟110 ⚡4-25

	CODE
	1844A1W_
	1844A1S_
	1844A1G_
	1844A1B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460/615 >90	3
3000K	495/665 >90	5
2000-3000K	330/485 >90	9


LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°/355° 0.23kg

wire springs ⌀87-88 ∟120 ⚡4-25

	CODE
	112420W0
	112420S0
	112420G0
	112420B0

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim



	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



PRIVATE RESIDENCE AUSTRIA

DEEP ADJUST fort

Ceiling recessed

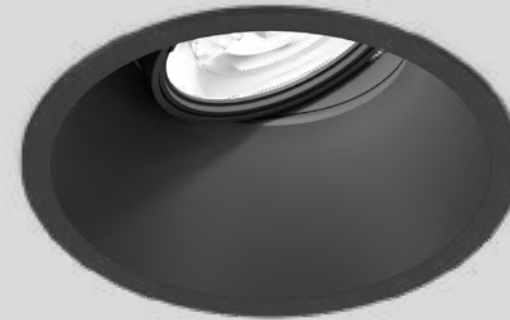


1.0

LED COB 25W | 700mA | 35V
aluminium

IP20 0°-30°/355° 34° SDCM2 L80|50K 0.36kg

wire springs 126-130 130 4-25

	CODE
	112961W_
	112961B_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	2490 >90	5
4000K	2680 >90	7


LED module 20 years replaceability

ALWAYS USE

driver | 700mA



	CODE
30W dim	90225702
28W DALI	90245704

more options and specs on page 809






PRIVATE RESIDENCE BELGIUM

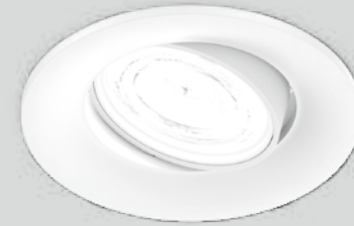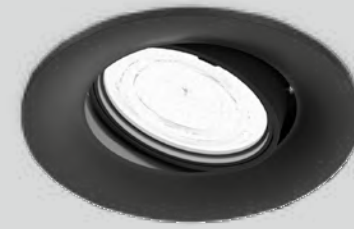

SPINEO

Ceiling recessed



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°/355° 0.18kg

wire springs ⌀79-83 Ⓜ.80 ⚡4-16

CODE

	160120W0
	160120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE

	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5



BLADE SPRING VERSIONS

weverducre.com/more-spineo






RONY point

Ceiling recessed

new



1.0

LED COB 5W | 250mA | 18V
aluminium

IP20 32° SDCM2 L80|50K 0.05kg

wire springs 48-51 60 4-25

CODE

193161W_

193161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	410 >90	3
3000K	450 >90	5

ALWAYS USE

driver | 250mA



CODE

5W dim 90226201

13W DALI* 90246501


*revision opening required

more options and specs on page 806



BLADE SPRING VERSIONS ONLINE


weverducre.com/more-rony-point





RONY

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-35°/355° A 34° SDCM2 L80/55K 0.34kg

wire springs 102-104 90 4-25

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°/355° 0.32kg

wire springs 102-104 110 4-25

CODE	
White	110261W_
Black	110261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530/710 >90	3
3000K	575/770 >90	5
2000-3000K	380/560 >90	9

LED module 20 years replaceability

CODE	
White	110120W0
Black	110120B0

ALWAYS USE

driver | 500mA

CODE	
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



MORE BEAM ANGLES ONLINE





weverducre.com/more-rony





RON

Ceiling recessed

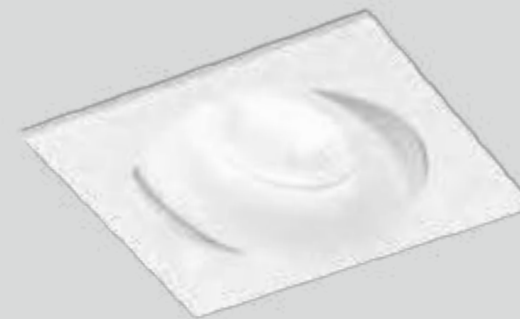

1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium fits in round cutout

IP20 0°-35°/355° A-34° SDCM2 L80/55K 0.36kg

wire springs 102-104 110 4-25

CODE

White	111461W_
Black	111461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	530/710	>90	3
3000K	575/770	>90	5
2000-3000K	380/560	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

CODE

10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

2.0 LED

2x COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° A-34° SDCM2 L80/55K 0.73kg

wire springs 102x210 110 4-25

CODE

White	111561W_
Black	111561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x530/710	>90	3
3000K	2x575/770	>90	5
2000-3000K	2x380/560	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA | only 1x needed

CODE

20W	90218601
20W dim	90224602
24W DALI	90244701

more options and specs on page 807

1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium fits in round cutout

IP20 0°-35°/355° 0.34kg

wire springs 102-104 110 4-25

CODE

White	111120W0
Black	111120B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	460lm	>90	3
3000K	437lm	>90	5
3000K	500lm	>90	5
3000K	457lm	>90	5

LED module 20 years replaceability

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

2.0 PAR16

2x PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°/355° 0.69kg

wire springs 102x210 110 4-25

CODE

White	111220W0
Black	111220B0

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	460lm	>90	3
2700K	437lm	>90	5
3000K	500lm	>90	5
3000K	457lm	>90	5

LED module 20 years replaceability

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

FLAT 'N' FANCY


Hidden champions

Sleek built-in luminaires are subtle, elegant, and let every room shine in the brightest light. No wonder the space-saving all-rounders are among the most popular lighting choices these days. That said, there are some requirements you'll need to consider when mounting recessed luminaires. Especially with low ceilings in modern living spaces or the lack of space in suspended ceilings, things can get really tricky – and every centimetre counts. The specially designed compact lights for low ceilings with low installation depths are not only true space savers, but also a design highlight – perfect for renovation projects and small city apartments.


MATCH point 1.0 trimless	p. 57	60 mm
DEEP bijou 2.0	p. 61	67 mm
DEEP petit	p. 63	57 mm
DEEP ADJUST petit	p. 69	65 mm
RONY point	p. 83	60 mm
PIRRO petit	p. 91	60 mm
PIRRO 2.0	p. 93	60 mm
PIRRO 4.0 6.0	p. 95	60 mm
PLANO petit	p. 97	65 mm
STRANGE petit trimless	p. 101	65 mm
MATCH 2.0	p. 113	60 mm

Schlichte Einbauleuchten halten sich optisch elegant im Hintergrund, während sie jeden Raum in seinem besten Licht erstrahlen lassen. Kein Wunder also, dass die platzsparenden Alleskönner so beliebt sind. Trotzdem: Gewisse Voraussetzungen müssen für den Einbau gegeben sein. Denn vor allem mit niedrigen Deckenhöhen in modernen Wohnräumen oder zu wenig Platz in den Zwischendecken kann es schon mal ganz schön knifflig werden – dabei zählt jeder Zentimeter. Die speziell für niedrige Räume entwickelten Leuchten mit wenig Einbautiefe sind nicht nur platzsparend, sondern vor allem auch ein echtes Designhighlight – perfekt für Renovierungsprojekte und kleine City-Apartments.

MATCH 1.0 trimless	p. 113	67 mm
MATCH stick 1.0 trimless	p. 117	67 mm
CENO 2.0 3.0	p. 121	60 mm
BLIEK petit 1.0 2.0	p. 123	60 mm
DEEP petit IP65	p. 139	60 mm
RINI SNEAK IP44	p. 149	52 mm
LUNA ROUND IP44	p. 151	55 mm
LUNA SQUARE IP44	p. 151	52 mm
MIRBI IP44	p. 157	50 mm
CITY IP44	p. 159	50 mm

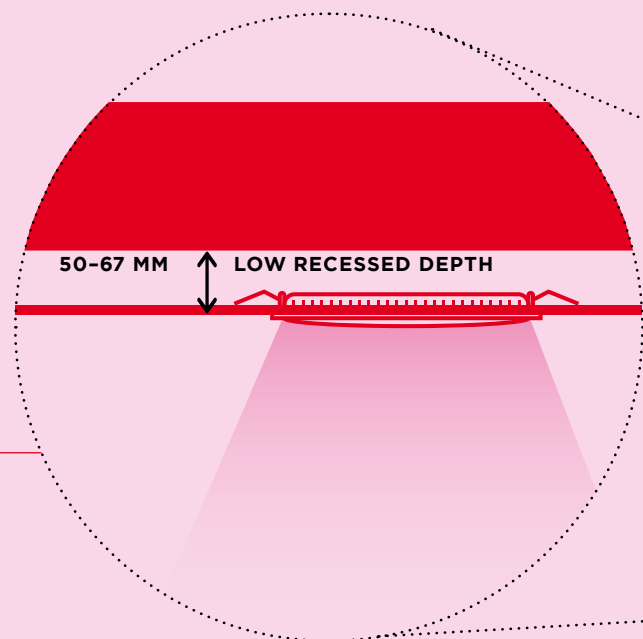

back

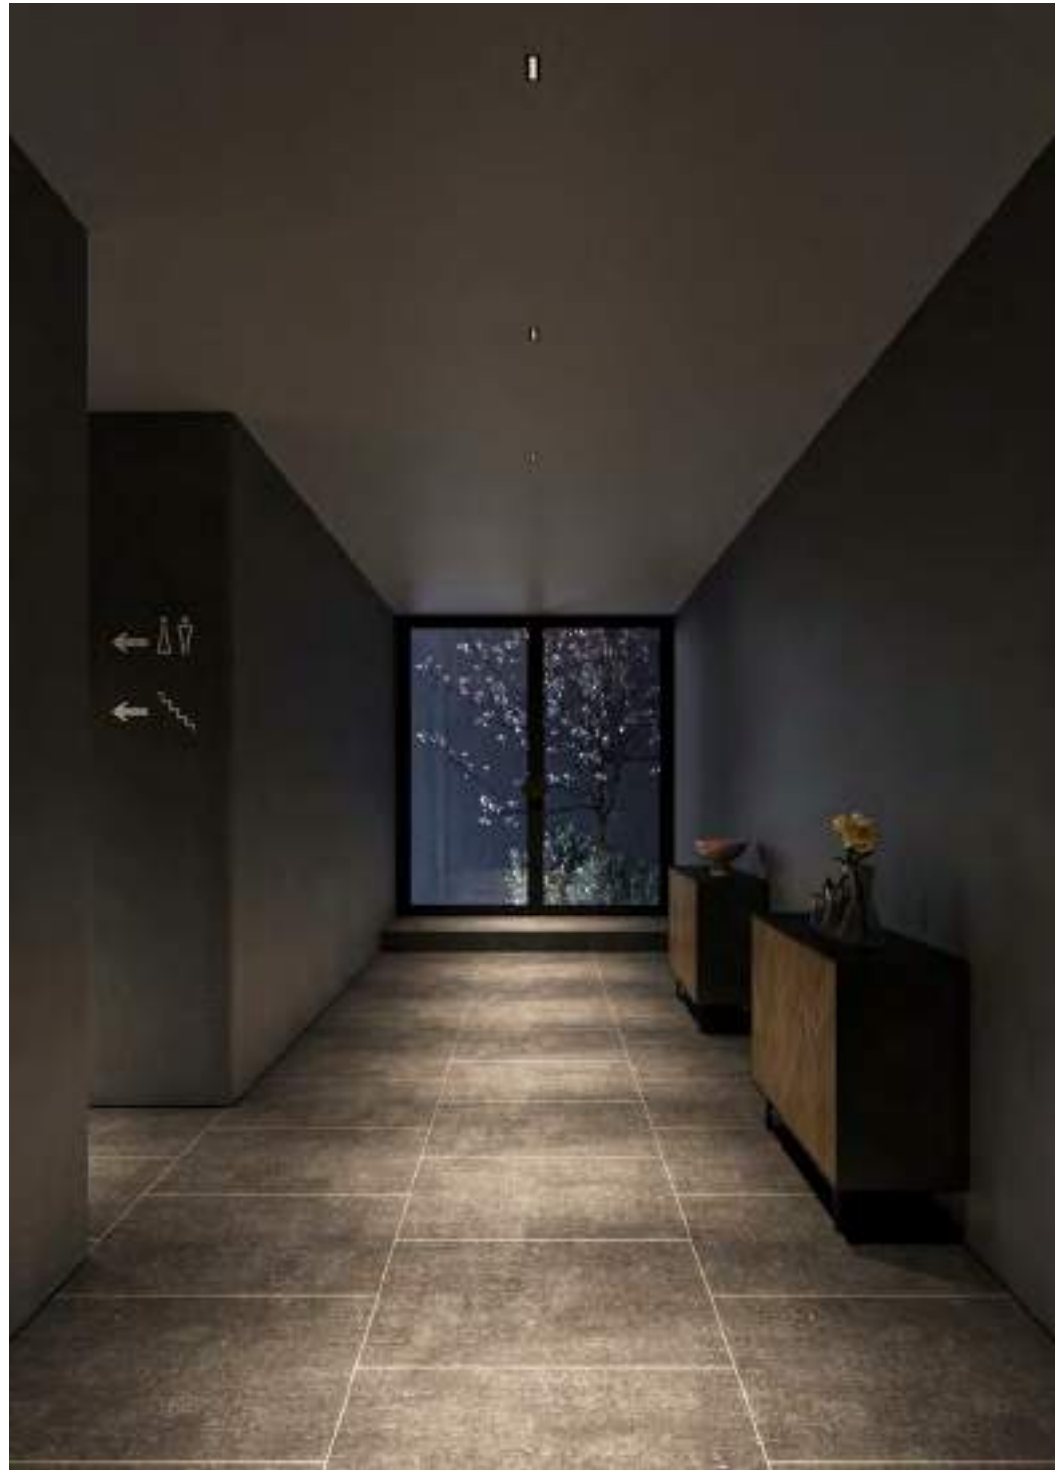

PIRRO petit




Ceiling recessed



203



339 | 361



2.0

LED COB 4W | 350mA | 12V
aluminium

IP20 Δ 28° SDCM3 L80|50K 0.07kg

wire springs \square 64x33 \perp 60 \curvearrowright 4-25

		CODE	
		129151E_	
		129151WM_	
		129151CH_	
		129151B_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x145	>90	3
3000K	2x160	>90	5

ALWAYS USE

driver | 350mA

	CODE
4.5W dim	90223101

more options and specs on page 807

4.0

LED COB 8W | 350mA | 24V
aluminium

IP20 Δ 28° SDCM3 L80|50K 0.10kg

wire springs \square 116x33 \perp 60 \curvearrowright 4-25

		CODE	
		129251E_	
		129251WM_	
		129251CH_	
		129251B_	

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	4x145	>90	3
3000K	4x160	>90	5

ALWAYS USE

driver | 350mA

	CODE
10W dim	90223406

more options and specs on page 806

6.0

LED COB 12W | 350mA | 36V
aluminium

IP20 Δ 28° SDCM3 L80|50K 0.15kg

wire springs \square 168x33 \perp 60 \curvearrowright 4-25

		CODE	
		129351E_	
		129351WM_	
		129351CH_	
		129351B_	



LIGHT COLOUR	LUMEN	CRI	CODE
2700K	6x145	>90	3
3000K	6x160	>90	5

ALWAYS USE

driver | 350mA




	CODE
13W dim	90223404

more options and specs on page 807





PRIVATE RESIDENCE | STUDIO GLYN UNITED KINGDOM



1.0

LED COB 5W | 500mA | 9V
aluminium

IP20 Δ 32° SDCM2 L70|55K 0.09kg

wire springs \square 50x50 \perp 85 $\$$ 4-25

CODE	
	150161E_
	150161J_
	150161K_
	150161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	420 >90	5

ALWAYS USE

driver | 500mA

CODE	
6.5W dim	90224301
24W DALI	90244701

more options and specs on page 808

2.0

LED COB 9W | 500mA | 18V
aluminium

IP20 Δ 32° SDCM2 L70|55K 0.16kg

wire springs \square 95x50 \perp 60 $\$$ 4-25

CODE	
	150261E_
	150261J_
	150261K_
	150261B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >90	3
3000K	2x420 >90	5

ALWAYS USE

driver | 500mA | only 1x needed

CODE	
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



PIRRO

Ceiling recessed




As awarded by The Chicago Athenaeum: Museum of Architecture and Design






205



339 | 361



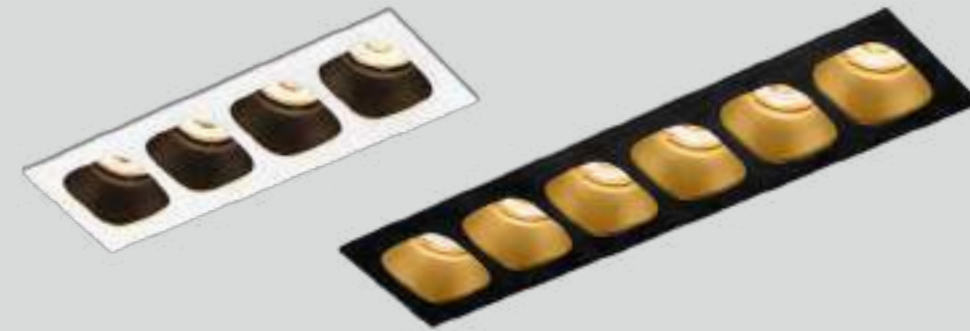

4.0

LED COB 17W | 500mA | 36V
aluminium

IP20 32° SDCM2 L70|55K 0.28kg

wire springs 181x50 1.60 4-25

CODE	
	150461E_
	150461J_
	150461K_
	150461B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x400 >90	3
3000K	4x420 >90	5

ALWAYS USE

driver | 500mA | only 1x needed

CODE	
20W dim	90224602
24W DALI	90244701

more options and specs on page 808



PIRRO

Ceiling recessed



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



205



339 | 361

6.0

LED COB 25W | 500mA | 2x27V
aluminium

IP20 32° SDCM2 L70|55K 0.40kg

wire springs 269x50 1.60 4-25

CODE	
	150661E_
	150661J_
	150661K_
	150661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x400 >90	3
3000K	6x420 >90	5

ALWAYS USE

driver | 500mA | 2x needed




CODE	
20W dim	90224602
24W DALI	90244701

more options and specs on page 808



PLANO petit

Ceiling recessed

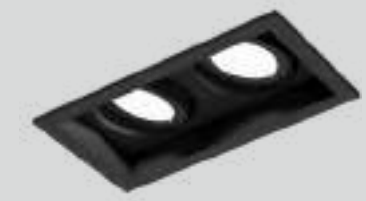

1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.08kg

wire springs 54x59 65 2-22

2.0

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.15kg

wire springs 54x110 65 2-22

3.0

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.22kg

wire springs 54x162 65 2-22

CODE
162461W_
162461Q_
162461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K 16V	440	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 350mA

CODE
90213303
90223406
90243501

more options and specs on page 806

CODE
162561W_
162561Q_
162561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x540	>90	3
3000K	2x570	>90	5
2000-3000K 16V	2x440	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 350mA | only 1x needed

CODE
90218601
90223404
90243501

more options and specs on page 807

CODE
162661W_
162661Q_
162661B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x540	>90	3
3000K	3x570	>90	5
2000-3000K 16V	3x440	>90	9



LED module 20 years replaceability

ALWAYS USE

driver | 350mA | 3x needed


CODE
90213303
90223406
90243501

more options and specs on page 806



MORE BEAM ANGLES ONLINE

weverducre.com/more-plano-petit








back





PLANO

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°|355° A 34° SDCM2 L80|55K 0.26kg

wire springs 74x78 11.95 2-18

CODE	
	118561W_
	118561S_
	118561Q_
	118561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	510/685 >90	3
3000K	550/740 >90	5
2000-3000K	365/535 >90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

2.0 LED

2x COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°|355° A 34° SDCM2 L80|55K 0.48kg

wire springs 74x148 11.95 2-18

CODE	
	118661W_
	118661S_
	118661Q_
	118661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x510/685 >90	3
3000K	2x550/740 >90	5
2000-3000K	2x365/535 >90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
24W DALI	90244701

more options and specs on page 807

1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°|355° 0.24kg

wire springs 74x78 11.125 2-18

CODE	
	118120W0
	118120S0
	118120Q0
	118120B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

2.0 PAR16

2x PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°|355° 0.44kg

wire springs 74x148 11.125 2-18

CODE	
	118220W0
	118220S0
	118220Q0
	118220B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

OPTIONAL




PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



STRANGE petit trimless

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° 31° SDCM2 L80|55K 0.07kg

CODE	
	163461W_
	163461M_
	163461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540 >90	3
3000K	570 >90	5
2000-3000K	440 >90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 64x64 65 7-32

CODE	
	90017202

driver | 350mA

CODE	
6W	90213303
10W dim	90223406
14W DALI	90243501

more options and specs on page 806



2.0

2x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° 31° SDCM2 L80|55K 0.13kg

CODE	
	163561W_
	163561M_
	163561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x540 >90	3
3000K	2x570 >90	5
2000-3000K	2x440 >90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 64x117 65 7-32

CODE	
	90017205

driver | 350mA | only 1x needed

CODE	
17.5W	90218601
13W dim	90223404
14W DALI	90243501

more options and specs on page 807



3.0

3x LED COB 6W | 350mA | 17V
aluminium

IP20 0°-25°|355° 31° SDCM2 L80|55K 0.19kg

CODE	
	163661W_
	163661M_
	163661B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x540 >90	3
3000K	3x570 >90	5
2000-3000K	3x440 >90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 64x169 65 7-32

CODE	
	90017208

driver | 350mA | 3x needed

CODE	
6W	90213303
10W dim	90223406
14W DALI	90243501


more options and specs on page 806





STRANGE trimless

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° 34° SDCM2 L80/55K 0.43kg

CODE
131461W_
131461M_
131461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/685	>90	3
3000K	550/740	>90	5
2000-3000K	365/535	>90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 86x86 11.95 7-32

CODE
90017120

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



2.0 LED

2x COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° 34° SDCM2 L80/55K 0.74kg

CODE
131561W_
131561M_
131561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x510/685	>90	3
3000K	2x550/740	>90	5
2000-3000K	2x365/535	>90	9

LED module 20 years replaceability

ALWAYS USE


alu plasterkit 86x156 11.95 7-32

CODE
90017121

driver | 500mA | only 1x needed

	CODE
20W	90218601
20W dim	90224602
24W DALI	90244701

more options and specs on page 807



1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°/355° 0.41kg

CODE
131120W0
131120M0
131120B0

ALWAYS USE


alu plasterkit 86x86 11.125 7-32

CODE
90017120

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



2.0 PAR16

2x PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-35°/355° 0.70kg

CODE
131220W0
131220M0
131220B0

ALWAYS USE

alu plasterkit 86x156 11.125 7-32

CODE
90017121

OPTIONAL




PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



SNEAK

Ceiling recessed

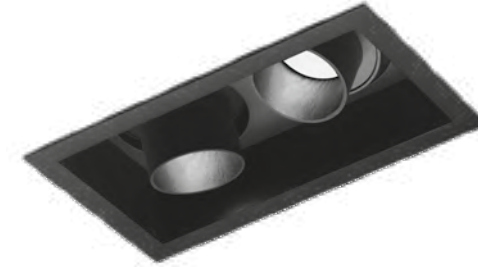

1.0

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° ∠30° SDCM2 L80/55K 0.19kg

wire springs 74x78 95 2-18

CODE

155751W_
155751K_
155751B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

2.0

2x COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° ∠30° SDCM2 L80/55K 0.34kg

wire springs 74x148 95 2-18

CODE

155851W_
155851K_
155851B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA | only 1x needed



	CODE
20W	90218601
20W dim	90224602
24W DALI	90244701

more options and specs on page 807



SNEAK trimless


Ceiling recessed

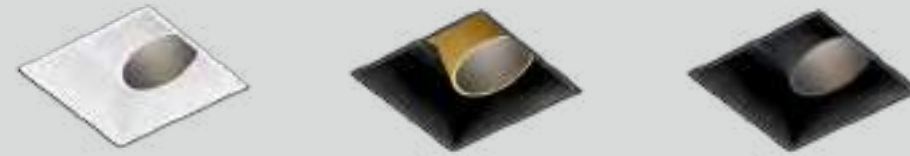

1.0

LED LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° A 30° SDCM2 L80|55K 0.19kg



2.0

LED 2x COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-35°/355° A 30° SDCM2 L80|55K 0.34kg

CODE	
	155551W_
	155551K_
	155551B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/460	>90	3
3000K	360/485	>90	5
2000-3000K	250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x86 \uparrow 95 \rightarrow 7-32

CODE	
	90017120

driver | 500mA

CODE	
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

CODE	
	155651W_
	155651K_
	155651B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x340/460	>90	3
3000K	2x360/485	>90	5
2000-3000K	2x250/370	>90	9

LED module 20 years replaceability

ALWAYS USE

alu plasterkit 86x156 \uparrow 95 \rightarrow 7-32

CODE	
	90017121

driver | 500mA | only 1x needed

CODE	
20W	90218601
20W dim	90224602
24W DALI	90244701


more options and specs on page 807



LECA

Ceiling recessed

new





1.0

LED COB 6W | 350mA | 18V
aluminium

IP20 0°-90°/350° A 31° SDCM2 L70|55K 0.32kg

wire springs ⌀40-41 1.68 4-26

2700K | CRI >90 | 510lm



OPTIONAL

honeycomb louver



	CODE
	188161W3
	188161Q3
	188161B3

ALWAYS USE

driver | 350mA

	CODE
7W dim	90223301
14W DALI*	90243501



*revision opening required
more options and specs on page 806

CODE
90051131



[back](#)








BLADE SPRING VERSIONS ONLINE
 weverducre.com/more-match-recessed

MATCH

Ceiling recessed



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

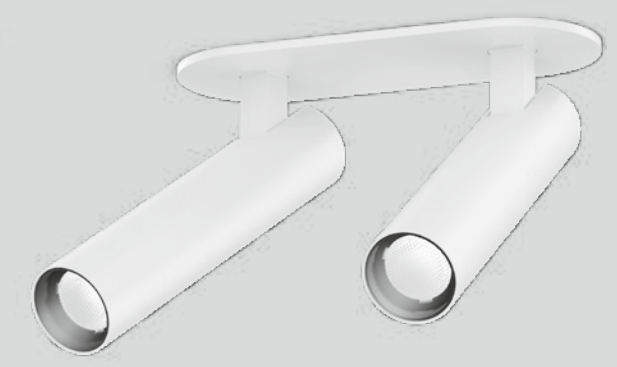

1.0

LED COB 6W | 350mA | 18V
aluminium

IP20 0°-90°/350° ▲30° SDCM2 L80|50K 0.16kg

wire springs ⌀45-47 Ⓜ85 ⚡4-26

CODE	
	190151W_
	190151BL_
	190151CH_
	190151B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x535 >90	3
3000K	2x560 >90	5

ALWAYS USE

driver | 350mA

CODE	
6W	90213303
7W dim	90223301
14W DALI*	90243501

*revision opening required
 more options and specs on page 806



2.0

2x LED COB 6W | 700mA | 18V
aluminium

IP20 0°-90°/350° ▲30° SDCM2 L80|50K 0.27kg

wire springs 105x30 Ⓜ60 ⚡4-26

CODE	
	190251W_
	190251B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x535 >90	3
3000K	2x560 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE	
15W dim	90225502
28W DALI	90245704

more options and specs on page 809



1.0 TRIMLESS

LED COB 6W | 350mA | 18V
aluminium

IP20 0°-90°/360° ▲30° SDCM2 L80|50K 0.15kg

wire springs ⌀45-47 Ⓜ67 ⚡4-26

CODE	
	190851W_
	190851BL_
	190851B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	560 >90	5

ALWAYS USE

driver | 350mA

CODE	
6W	90213303
7W dim	90223301
14W DALI	90243501

revision opening required
 more options and specs on page 806





Ⓟ



MATCH stick


Ceiling recessed



reddot winner 2023



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 TRIMLESS

LED COB 6W | 350mA | 18V
aluminium

IP20 0°-90°/360° A 30° SDCM2 L80/50K 0.37kg

45-47 67 4-26

CODE

	190951W_
	190951BL_
	190951B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	560 >90	5



ALWAYS USE

driver | 350mA



CODE

6W	90213303
7W dim	90223301
14W DALI	90243501

revision opening required
more options and specs on page 806



back



OPTIONAL

honeycomb louver

CODE 90051131

1.0 SEMI RECESSED

LED COB 6W | 350mA | 17V aluminium

IP20 0°-90°|350° A 31° SDCM2 L70|55K 0.14kg

	CODE
	176561W_
	176561B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

ALWAYS USE


driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI*	90243501

*revision opening required
more options and specs on page 806

CENO

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V aluminium

IP20 0°-90°|350° A 31° SDCM2 L70|55K 0.12kg

wire springs 45-47 1.85 4-26

	CODE
	176161W_
	176161G_
	176161Q_
	176161K_
	176161CH_
	176161B_

blade springs 46-48 1.85 min. 8

	CODE
	176161W_C
	176161Q_C
	176161B_C

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5
2000-3000K 16V	355 >90	9

ALWAYS USE

driver | 350mA

	CODE
6W	90213303
7W dim	90223301
14W DALI*	90243501




*revision opening required
more options and specs on page 806





CENO

Ceiling recessed



1.1

LED COB 6W | 350mA | 17V aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.13kg

blade springs 32x66 85 min. 4

CODE
176461W_
176461Q_
176461K_
176461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

ALWAYS USE

driver | 350mA

CODE
6W 90213303
7W dim 90223301
14W DALI 90243501

more options and specs on page 806

2.0

2x LED COB 6W | 700mA | 17V aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.26kg

blade springs 32x145 60 min. 4

CODE
176261W_
176261Q_
176261K_
176261B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE
15W dim 90225502
28W DALI 90245704

more options and specs on page 809

3.0

3x LED COB 6W | 700mA | 26V aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.39kg

blade springs 32x221 60 min. 4

CODE
176361W_
176361Q_
176361K_
176361B_




LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x470 >90	3
3000K	3x500 >90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE
20W dim 90225604
28W DALI 90245704

more options and specs on page 809



OPTIONAL

honeycomb louver

CODE
90051131

more options and specs on page 806



227



303 | 353






513



BLIEK petit

Ceiling recessed



1.0

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°/355° A 31° SDCM2 L70|55K 0.20kg

wire springs 086-89 1.60 4-23

2.0

2x LED COB 6W | 700mA | 17V
aluminium




IP20 0°-60°/355° A 31° SDCM2 L70|55K 0.40kg

wire springs 087x176 1.60 4-23

1.0 TRIMLESS

LED COB 6W | 350mA | 17V
aluminium

IP20 0°-60°/355° A 31° SDCM2 L70|55K 0.17kg



OPTIONAL

honeycomb louver

CODE 90051131

CODE
164461W_
164461CH_
164461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5
2000-3000K 16V	355	>90	9

ALWAYS USE

driver | 350mA

CODE
90213303
90223406
90243501

more options and specs on page 806

CODE
164261W_
164261CH_
164261B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5

ALWAYS USE

driver | 700mA | only 1x needed

CODE
90225502
90245704

more options and specs on page 809

CODE
164561W_
164561CH_
164561B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	500	>90	5
2000-3000K 16V	355	>90	9

ALWAYS USE

alu plasterkit 078-80 1.80 12,5, 15, 20, 25
CODE

90017210

driver | 350mA

CODE
90213303
90223406
90243501

more options and specs on page 806





BLIEK ROUND

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V aluminium

IP20 0°-60°/355° A 33° SDCM2 L80/55K 0.45kg

wire springs $\varnothing 127$ $\perp 1.75$ $\approx 4-25$

	CODE
	125361W_
	125361K_
	125361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/640	>90	3
3000K	490/650	>90	5
4000K	500/670	>90	7
2000-3000K	350/500	>90	9


LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808



1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP20 0°-60°/350° 0.42kg

wire springs $\varnothing 127$ $\perp 1.75$ $\approx 4-25$

	CODE
	125120W0
	125120K0
	125120B0



OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



BLADE SPRING VERSIONS AND MORE BEAM ANGLES ONLINE
weverducre.com/more-bliek-round






back



BLIEK SQUARE

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP20 0°-60°/355° -A-33° SDCM2 L80/55K 0.47kg

wire springs 111x111 75 4-25

	CODE
White	125461W_
Black	125461B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480/640	>90	3
3000K	490/650	>90	5
4000K	500/670	>90	7
2000-3000K	350/500	>90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W	90214406
10W dim	90224403
24W DALI	90244701

more options and specs on page 808

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-60°/350° 0.45kg


wire springs 111x111 75 4-25

	CODE
White	125220W0
Black	125220B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

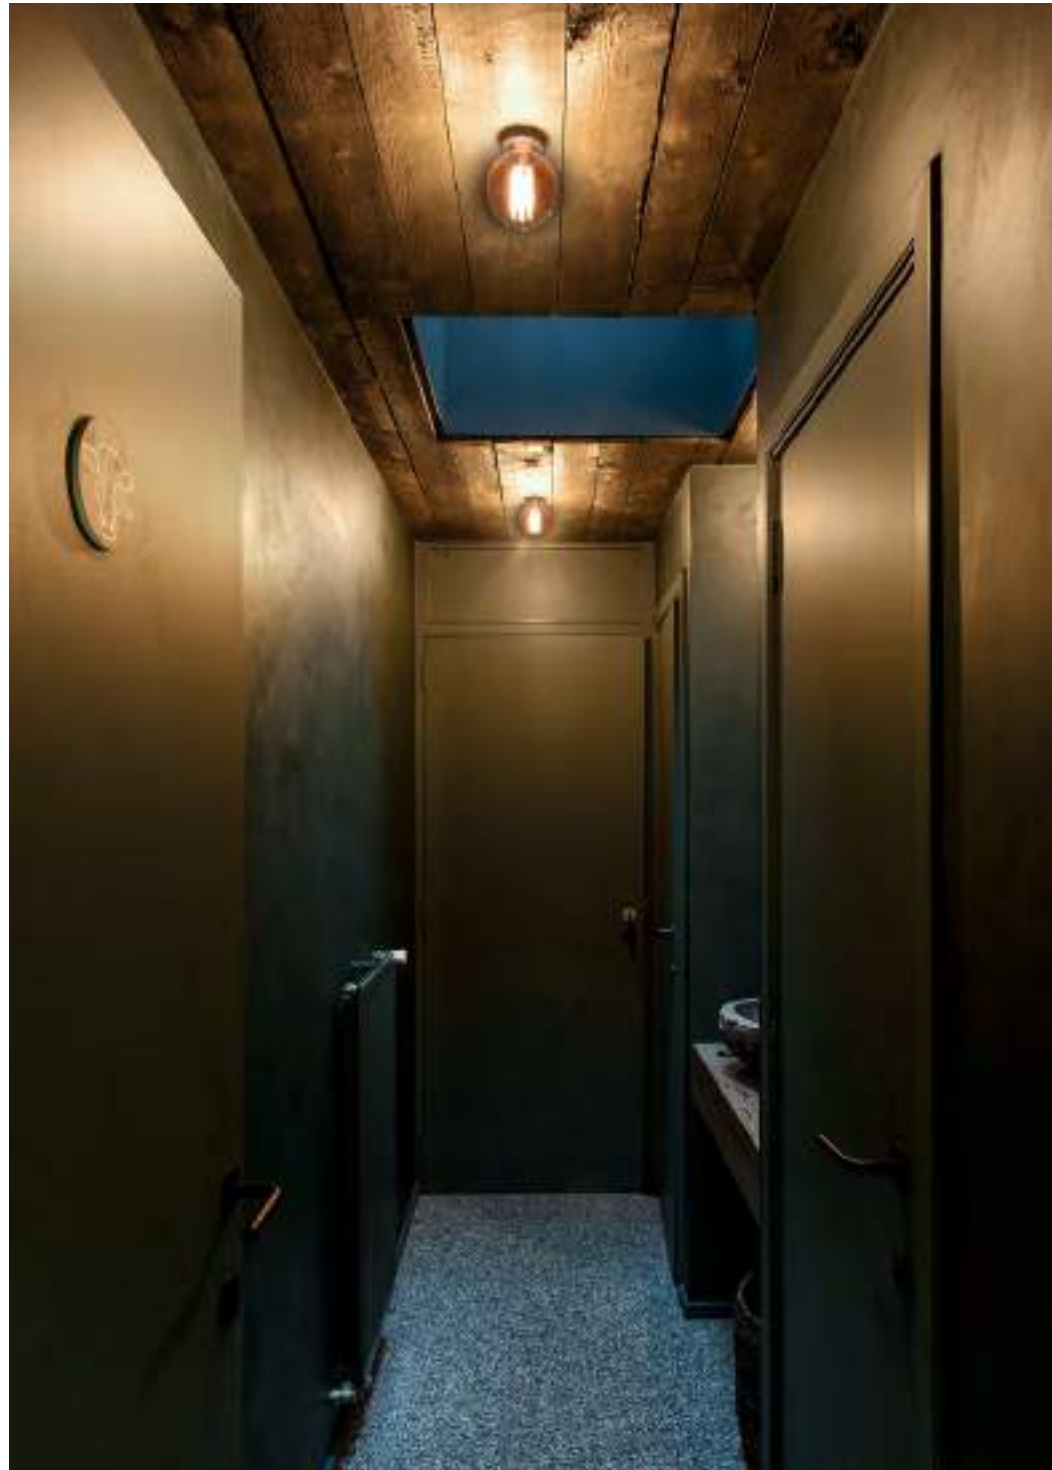

EETCAFÉ DEN OS | MARKEY & SCHELSTRAETE NUKERKE | BELGIUM



RUVI

Ceiling recessed

1.0

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP20 0.25kg

54-56 JTL90 7-33

CODE

1671E0B0

OPTIONAL

G95 5.6W | E27 | phase-cut dim
filament | gold mirror

CODE

2700K | 464lm 9003E142

G95 5.1W | E27 | phase-cut dim
filament | gold mirror

CODE

2200K | 371lm 9003E156

G95 5.6W | E27 | phase-cut dim
filament | silver mirror


CODE

2700K | 464lm 9003E157

G95 5.4W | E27 | phase-cut dim
filament | gold tinted

CODE

2200K | 380lm 9003E111



639

SCARED OF WATER? NO WAY!


They're *fun* to bathe with

Keep knocking on the bathroom door all you want, IP44 luminaires will be in no hurry to leave, even less so with IP65. Luminaires with the IP44 certification are protected against splashes and those with IP65 are resistant to water jets. They're every bit as comfortable in a SPA as they are above a shower. Don't have much space? Then choose a version with a low installation depth. They fit well in rooms with low ceiling heights as well, making even the smallest hotel bathrooms shine. By the way, many types of IP44 or IP65 luminaires are not only available as spots but in many more varieties, too.

DEEP point IP44	p. 135
DEEP bijou IP65	p. 137
DEEP petit IP65	p. 139
DEEP IP65 IP44	p. 141
DEEPER IP44	p. 143
MATCH point IP44	p. 145
TAIO IP65	p. 147
RINI SNEAK IP44	p. 149
LUNA ROUND IP44	p. 151
LUNA SQUARE IP44	p. 151
PLANO IP44	p. 153
PERLEZ IP44	p. 155
MIRBI IP44	p. 157
CITY IP44	p. 159

Eines ist sicher: Bei IP44-Leuchten kann man lange an die Badezimmertür klopfen – die kommen nicht raus. Bei IP65-Leuchten noch länger. Schließlich sind Leuchten mit der Zertifizierung IP44 optimal vor Spritzwasser und mit IP65 sogar vor einem Wasserstrahl geschützt. Und fühlen sich daher im SPA-Bereich genau so wohl, wie über der Dusche. Sie haben nur wenig Platz? Dann sind Versionen mit geringer Einbautiefe die perfekte Lösung. Sie passen auch in Räume mit geringer Raumhöhe und bringen so selbst das kleinste Hotelbadezimmer zum Strahlen. Übrigens: IP44- oder IP65-Leuchten sind natürlich nicht nur als Spots, sondern auch in vielen anderen Ausführungen erhältlich.

PERLEZ IP44	p. 279
TAIO IP65	p. 281
MIRBI IP44	p. 283
ROB IP44	p. 285
ROBY IP44	p. 287
TOWNA IP44	p. 289
PERLEZ IP44	p. 635
PERLEZ CLIP IP44	p. 637
RUVI IP44	p. 639
MIRBA IP44	p. 641
MIRBI LONG IP44	p. 643

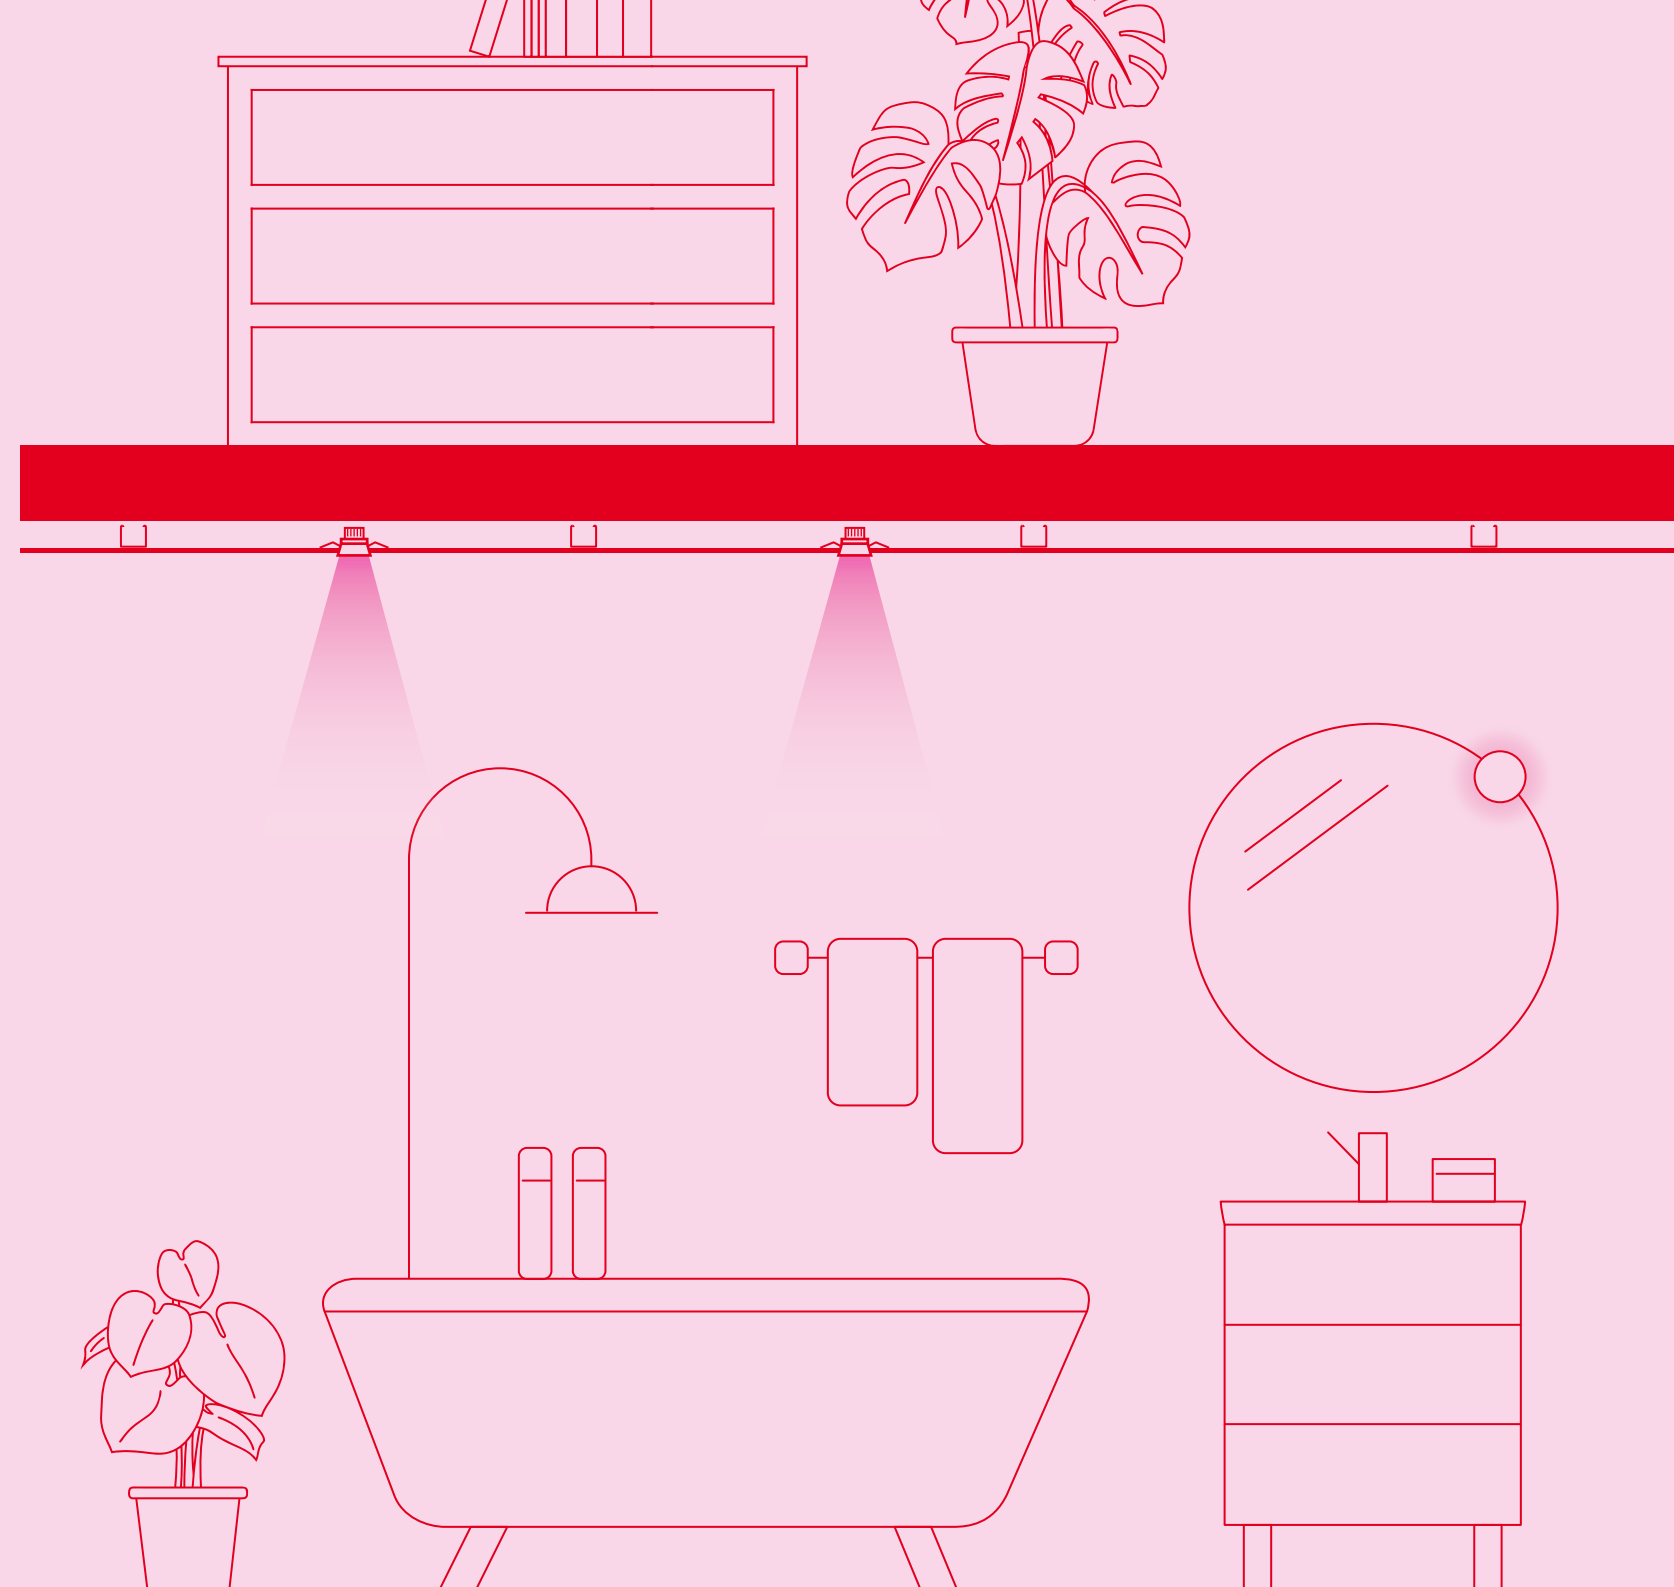



DEEP point IP44

Ceiling recessed



1.0

LED COB 4W | 250mA | 18V
aluminium

IP44 32° SDCM2 L80|50K 0.06kg

wire springs 40-41 68 4-25

	CODE
	185161W_
	185161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	370 >90	3
3000K	410 >90	5

ALWAYS USE


driver | 250mA

	CODE
5W dim IP20	90226201
13W DALI IP20*	90246501

*revision opening required
more options and specs on page 806



HOTEL MARTIN'S RENTMEESTERIJ | PCP ARCHITECTS BILZEN | BELGIUM



DEEP bijou IP65

Ceiling recessed



1.0

LED COB 4W | 500mA | 8V
aluminium

IP65 30° SDCM2 L80|55K 0.09kg

wire springs 50-52 1.85 4-25

671

CODE

	165361W_
	165361B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	495 >90	5

ALWAYS USE

driver | 500mA



CODE

6W IP20	90214201
6.5W dim IP20*	90224301
7W IP67	90214301

*revision opening required
more drivers on page 808



BLADE SPRING VERSIONS ONLINE
weverducre.com/more-deep-bijou-ip65






DEEP petit IP65

Ceiling recessed

new



1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 31° SDCM2 L80|50K 0.04kg

wire springs ⌀68-70 1.60 4-25

CODE

153761W_

153761B_

LIGHT COLOUR LUMEN|CRI CODE

2700K 590|>90 3

3000K 610|>90 5

ALWAYS USE

driver | 350mA

CODE



6W | IP20 90213303

10W dim | IP20 90223406

17W | IP68* 90213602

*revision opening required

more options and specs on page 806




back



LINK LAB CREATIVE OFFICES | STAY STUDIO KORTRIJK | BELGIUM

DEEP IP65 | IP44

Ceiling recessed



1.0 LED

LED COB 6,9W | 350/500mA | 17V aluminium

IP65 33° SDCM2 L80I55K 0.24kg

wire springs 86-89 80 4-27

CODE	
184161W	184161B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | 500mA

CODE	
10W IP20	90214406
10W dim IP20	90224403
24W IP68	90214702

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V aluminium

IP44 0.15kg

wire springs 86-89 90 4-25

CODE	
112610W0	112610B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

ALWAYS USE

driver | 12V

CODE	
10W dim IP20	90221401
25W dim IP20	90221701

specs on page 810



1.0 PAR16

PAR16 max. 12W | GU10 100-240VAC | 50-60Hz aluminium

IP44 0.16kg

wire springs 86-89 125 4-25


CODE	
112620W0	112620B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5




BLADE SPRING VERSIONS AND MORE BEAM ANGLES ONLINE

weverducre.com/more-deep-ip44-65



673





DEEPER IP44

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 34° SDCM2 L80I55K 0.17kg

wire springs 76-79 90 4-38

CODE
152461W_
152461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440/600 >90	3
3000K	480/645 >90	5
2000-3000K	320/470 >90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W IP20	90214406
10W dim IP20	90224403
24W DALI IP20	90244701

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
aluminium

IP44 0.11kg

wire springs 76-79 100 4-38

CODE
152210W0
152210B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440/600 >90	3
3000K	480/645 >90	5
2000-3000K	320/470 >90	9

LED module 20 years replaceability

ALWAYS USE

driver | 12V

	CODE
10W dim IP20	90221401
25W dim IP20	90221701

specs on page 810



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44 0.15kg

wire springs 76-79 130 4-38

CODE
152220W0
152220B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440/600 >90	3
3000K	480/645 >90	5
2000-3000K	320/470 >90	9

LED module 20 years replaceability

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



RESTAURANT OSAR | STEENHUYSE INTERIEURARCHITECTEN TIELT | BELGIUM



MATCH point IP44

Ceiling recessed



reddot winner 2023



223



As awarded by The Chicago Athenaeum: Museum of Architecture and Design

307 | 321



42

ø45

407

1.0

LED COB 5W | 250mA | 18V
aluminium

IP44 | 32° SDCM2 L80|50K 0.06kg

wire springs | 40-41 | 68 | 4-25

515 | 623

659

CODE

191261W_

191261B_

LIGHT COLOUR LUMEN | CRI CODE

2700K 300 | >90 3

3000K 330 | >90 5

ALWAYS USE

driver | 250mA


CODE

5W dim | IP20 90226201



13W DALI | IP20* 90246501

*revision opening required

more options and specs on page 806



back



TAIO IP65

Ceiling recessed



1.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass convex lens

IP65 | 105° | SDCM2 | L80 | 55K | 0.13kg

wire springs | 70 | L80 | 4-27

CODE	
	180781W_
	180781G_
	180781B_



LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/455	>90	3
3000K	370/495	>90	5

ALWAYS USE

driver | 500mA

CODE	
10W IP20	90214406
10W dim IP20	90224403
24W IP68	90214702

more options and specs on page 808






PRIVATE RESIDENCE BELGIUM

RINI SNEAK IP44

Ceiling recessed




1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 34° SDCM2 L80I55K 0.18kg

wire springs 76-79 52 4-25



1.0 MR16

QR-CBC51 max. 12W | GU5.3 | 12V
aluminium

IP44 0.12kg

wire springs 76-79 55 4-25



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44 0.16kg

wire springs 76-79 85 4-25

CODE
154461W_
154461B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	465/625 >90	3
3000K	505/675 >90	5
2000-3000K	335/495 >90	9

LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W IP20	90214406
10W dim IP20	90224403
24W DALI IP20	90244701

more options and specs on page 808

CODE
154210W0
154210B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

ALWAYS USE

driver | 12V

	CODE
10W dim IP20	90221401
25W dim IP20	90221701

specs on page 810



CODE
154220W0
154220B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5








PRIVATE RESIDENCE BELGIUM

LUNA IP44

Ceiling recessed

new

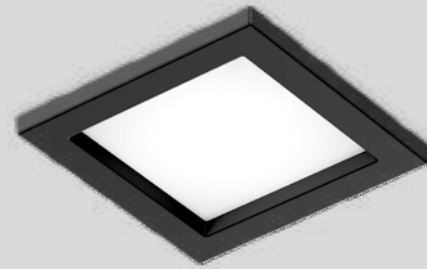

1.0 ROUND

LED PCB 6W | 350mA | 18V
aluminium | opal PMMA cover

IP44 SDCM3 L80/100K 0.12kg

blade springs 76-79 55 min.12

3000K | CRI >90 | 580lm

CODE

114881W5

114881B5

1.0 SQUARE

LED PCB 6W | 350mA | 18V
aluminium | opal PMMA cover

IP44 SDCM3 L80/100K 0.13kg

blade springs 73x73 52 min.12

3000K | CRI >90 | 610lm

CODE

114981W5

114981B5

ALWAYS USE

driver | 350mA

CODE

6W | IP20 90213303

10W dim | IP20 90223406

14W DALI | IP20 90243501

more options and specs on page 806

ALWAYS USE

driver | 350mA



CODE

6W | IP20 90213303

10W dim | IP20 90223406

14W DALI | IP20 90243501


more options and specs on page 806





PLANO IP44

Ceiling recessed



1.0 LED

LED COB 6/9W | 350/500mA | 17V
aluminium

IP44 34° SDCM2 L80I55K 0.21kg

wire springs 76x78 90 4-30

CODE
118861W_
118861B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	510/695 >90	3
3000K	550/740 >90	5
2000-3000K	365/535 >90	9


LED module 20 years replaceability

ALWAYS USE

driver | 500mA

	CODE
10W IP20	90214406
10W dim IP20	90224403
24W DALI IP20	90244701

more options and specs on page 808



1.0 MR16

QR-CBC51 max. 35W | GU5.3 | 12V
aluminium

IP44 0.15kg

wire springs 74x78 115 4-30

CODE
118410W0
118410B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5


LED module 20 years replaceability

ALWAYS USE

driver | 12V

	CODE
10W dim IP20	90221401
25W dim IP20	90221701

specs on page 810



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP44 0.19kg

wire springs 74x78 130 4-30

CODE
118420W0
118420B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	460lm	901228W3
2700K	437lm	901228B3
3000K	500lm	901228W5
3000K	457lm	901228B5

LED module 20 years replaceability

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



MORE BEAM ANGLES ONLINE


weverducre.com/more-plano-ip44




PERLEZ IP44

Ceiling recessed

new



255 | 259 | 279




1.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 SDCM3 L80|50K 0.36kg

wire springs 50-55 68 4-25




2.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 SDCM3 L80|50K 0.46kg

wire springs 50-55 68 4-25



3.0

LED COB 6/9W | 350/500mA | 18V
aluminium | opal glass

IP44 SDCM3 L80|50K 0.64kg

wire springs 50-55 68 4-25

CODE
192181W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	510/720	>95	3
3000K	540/760	>95	5

ALWAYS USE

driver | 350mA

CODE
90213303
90223301

driver | 500mA

CODE
90214406

more options and specs on page 806

CODE
192281W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	560/770	>95	3
3000K	590/810	>95	5

ALWAYS USE

driver | 350mA

CODE
90213303
90223301

driver | 500mA

CODE
90214406

more options and specs on page 806

CODE
192381W_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	610/820	>95	3
3000K	650/870	>95	5

ALWAYS USE



driver | 350mA

CODE
90213303
90223301


driver | 500mA

CODE
90214406

more options and specs on page 806



back

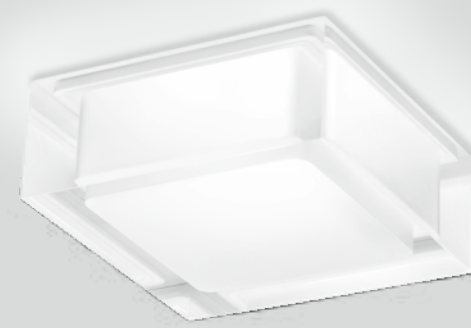

MIRBI IP44



Ceiling recessed



283



643



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover

IP44 SDCM3 L80160K 0.24kg

blade springs 76-79 1.50 min. 8

3000K | CRI >90 | 660lm

CODE

175688W5

2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
clear + opal PMMA cover



IP44 SDCM3 L80160K 0.26kg

blade springs 72x72 1.50 min. 8

3000K | CRI >90 | 660lm

CODE

175788W5





CITY IP44

Ceiling recessed



1.6


LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 0.64kg

wire springs ⌀202-205 ⏏50 ⚡4-22

3000K | CRI >90 | 1170lm

	CODE
White	115488W5
Black	115488B5



2.6


LED PCB 19W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.05kg





















wire springs ⌀297-300 ⏏50 ⚡4-22

3000K | CRI >90 | 1740lm

	CODE
White	115588W5
Black	115588B5



DOWN LIGHTS

					
<i>new</i> BOX MINI LED 165	BOX MINI PAR16 167	BOX 169	DOCUS MINI 173	DOCUS 175	
					
HEXO MINI 179	HEXO 181	<i>new</i> RAY MINI LED 185	RAY MINI PAR16 187	RAY 189	SOLID BIJOU 193
					
SOLID PETIT 195	SOLID 197	TRACE 201	PIRRO PETIT 203	PIRRO SPOT 205	PIRRO OPAL 211
					
PLANO PETIT 213	PLANO 215	SIRRO 217			

SPOT LIGHTS

				
<i>new</i> LECA 221	MATCH 223	<i>new</i> MATCH 4.0 225	<i>new</i> CENO 227	BLIEK PETIT 235



MICK
237




SARA ON BASE
241



SQUBE ON BASE
243

LUMINAIRES



VENN
261



DRO
263



WIRO
265



MIRRO
267



MIRRO SOFT
269



CLEA
271



new
FIL SPIN
251



new
TRACE SPIN
253



new
PERLEZ SPIN
255



new
TRACE GRID
257



new
PERLEZ GRID
259

IP-RATED



J.J.W.
273



ROOMOR OFFICE
275



FINLIN
277



new
PERLEZ IP44
279



TAIO IP65
281



MIRBI IP44 1.0
283



MIRBI IP44 2.0
283



ROB IP44
285



ROBY IP44
287



TOWNA IP44
289

MIX AND MATCH

The magic cube

Remember that small magic cube we just couldn't put down in the 80s? Then you will love BOX. It has an almost infinite number of variations for you to try – not just in terms of colour and size. BOX is incredibly flexible when it comes to insets and lamps. Grab a double espresso and start mixing and matching. Not really into cubes? Then try taking a fantastic HEXO, DOCUS, or RAY luminaire home with you.

Können Sie sich noch an den magischen kleinen Würfel erinnern, den wir in den 80ern einfach nicht aus der Hand legen konnten? Dann werden Sie BOX lieben. Denn auch mit ihr lassen sich nahezu unendlich viele Varianten durchprobieren. Und das nicht nur in puncto Farben und Größe. Auch bei Insets und Leuchtmitteln ist BOX mehr als nur flexibel. Also einfach einen doppelten Espresso schnappen und loskombinieren. Würfel sind nicht so Ihr Ding? Dann können Sie sich mit HEXO, DOCUS oder RAY auch andere tolle Leuchtenformen dieser Serie nach Hause holen.



weverducre.com/universalstars

SHADE COLOUR

- **W** White matt powder coated
- **L** Aluminium wet painted brushed
- **G** Gold wet painted brushed
- **M** Champagne wet painted brushed
- **Q** Bronze wet painted brushed
- **P** Copper wet painted brushed
- **B** Black matt powder coated

INNER REFLECTOR COLOUR

- **W** White matt wet painted
- **G** Gold wet painted
- **M** Champagne wet painted
- **Q** Bronze wet painted
- **B** Black matt wet painted

INNER COVER COLOUR

- **W** White matt wet painted
- **G** Gold wet painted
- **M** Champagne wet painted
- **B** Black matt wet painted



BOX MINI
CHAMPAGNE INNER REFLECTOR



BOX MINI
WHITE INNER REFLECTOR



BOX MINI
WHITE INNER REFLECTOR



BOX
WITHOUT INSET



BOX
GOLD INNER COVER



BOX
BLACK INNER COVER



BOX
WHITE INNER REFLECTOR





BOX 2.0
GOLD INNER REFLECTOR



BOX
BLACK INNER REFLECTOR




PRIVATE RESIDENCE | JACO GOUDRIAAN THE NETHERLANDS

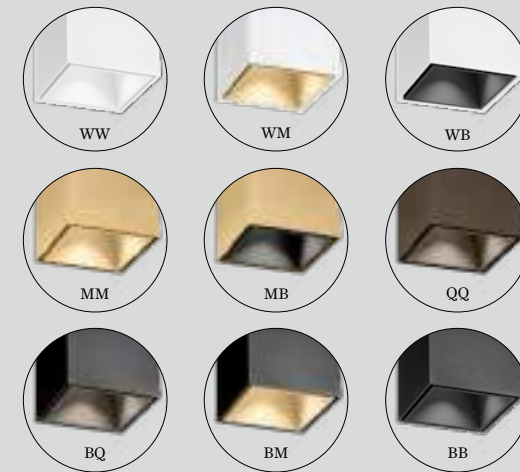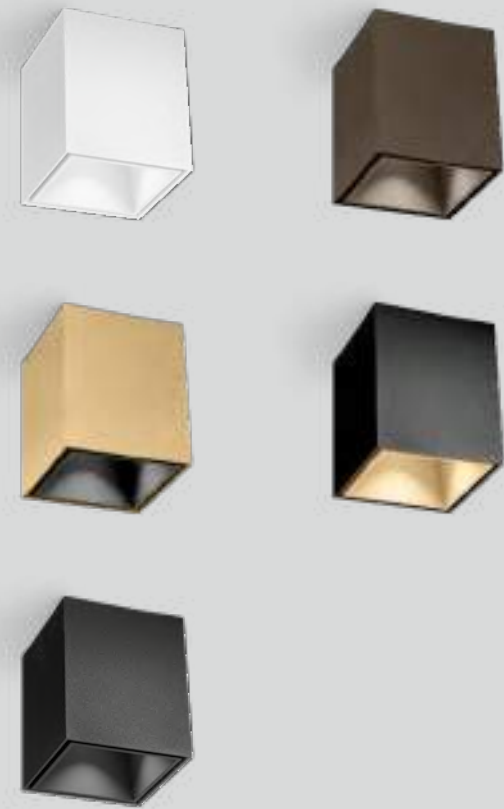

BOX mini

Ceiling surface

new



1.0 LED

LED LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 \star 25° SDCM2 L80|55K 0.24kg

	CODE
	258154WW_
	258154WM_
	258154WB_
	258154MM_
	258154MB_
	258154QQ_
	258154BQ_
	258154BM_
	258154BB_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	440 >90	3
3000K	470 >90	5

back



BOX mini

Ceiling surface



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.16kg



reflector

OPTIONAL

inner reflector max. 10W
polycarbonate

	CODE
	900199W1
	900199G1
	900199M1
	900199Q1
	900199B1

	CODE
	258120W0
	258120G0
	258120M0
	258120Q0
	258120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim




	CODE	
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

back



BOX

Ceiling surface

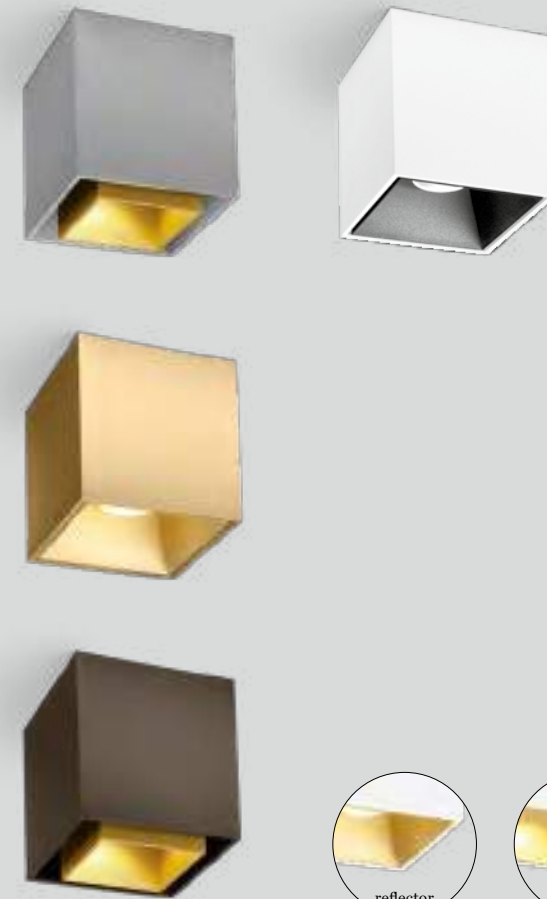

1.0 LED


LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 21° SDCM3 L70|50K 0.74kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.66kg



OPTIONAL

inner reflector max. 10W
polycarbonate

CODE	REFLECTOR
911211W1	White
911211G1	Gold
911211M1	Matte Gold
911211B1	Black

inner cover max. 10W
aluminium

CODE	INNER COVER
911011W1	White
911011G1	Gold
911011M1	Matte Gold
911011B1	Black

phase-cut dim

CODE	REFLECTOR	INNER COVER
186158W_	White	White
186158L_	White	Black
186158G_	Gold	White
186158M_	Matte Gold	White
186158Q_	Black	White
186158P_	Black	Black
186158B_	Black	Black

DALI

CODE	REFLECTOR	INNER COVER
186159W_	White	White
186159L_	White	Black
186159G_	Gold	White
186159M_	Matte Gold	White
186159Q_	Black	White
186159P_	Black	Black
186159B_	Black	Black

CODE	LIGHT COLOUR	LUMEN CRI	CODE
911011W1	2700K	670 >90	3
911011G1	3000K	700 >90	5
911011M1	2000-3000K*	470 >90	9

*only for phase-cut dim

CODE	REFLECTOR	INNER COVER
146120W0	White	White
146120L0	White	Black
146120G0	Gold	White
146120M0	Matte Gold	White
146120Q0	Black	White
146120P0	Black	Black
146120B0	Black	Black

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim




CODE	LIGHT COLOUR	LUMEN	CODE
901228W3	2700K 460lm		
901228B3	2700K 437lm		
901228W5	3000K 500lm		
901228B5	3000K 457lm		



PRIVATE RESIDENCE | DECOFORM BELGIUM

BOX

Ceiling surface

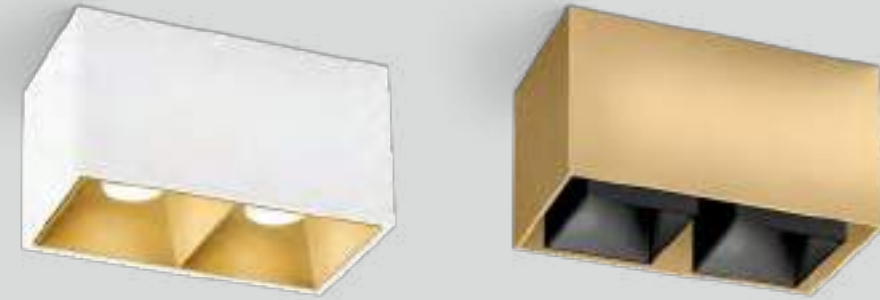

2.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium



OPTIONAL

double inner reflector max. 10W
polycarbonate

Color	CODE
White	911251W1
Gold	911251G1
Dark Gold	911251M1
Black	911251B1

inner cover max. 10W
aluminium | 2 pieces needed

Color	CODE
White	911011W1
Gold	911011G1
Dark Gold	911011M1
Black	911011B1

Color	CODE
White	186258W_
Light Grey	186258L_
Gold	186258G_
Dark Gold	186258M_
Dark Grey	186258Q_
Black	186258P_
Black	186258B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x670 >90	3
3000K	2x700 >90	5
2000-3000K	2x470 >90	9

Color	CODE
White	146220W0
Light Grey	146220L0
Gold	146220G0
Dark Gold	146220M0
Dark Grey	146220Q0
Black	146220P0
Black	146220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


Color	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

back



DOCUS mini

Ceiling surface



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.16kg



reflector

OPTIONAL

inner reflector max. 10W
polycarbonate

CODE	inner reflector max. 10W polycarbonate
900199W2	2700K 460lm
900199G2	3000K 500lm
900199B2	3000K 457lm

OPTIONAL



PAR16 6.5W | GU10 | phase-cut dim

CODE	PAR16 6.5W GU10 phase-cut dim
901228W3	2700K 437lm
901228B3	3000K 457lm
901228W5	2700K 460lm
901228B5	3000K 457lm



DOCUS

Ceiling surface



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 Δ 21° SDCM3 L70|50K 0.63kg

phase-cut dim

	CODE
	186358W_
	186358L_
	186358G_
	186358P_
	186358B_

DALI

	CODE
	186359W_
	186359L_
	186359G_
	186359P_
	186359B_



OPTIONAL

inner cover max. 10W
aluminium

	CODE	LIGHT COLOUR	LUMEN CRI	CODE
	911021W1	2700K	670 >90	3
	911021G1	3000K	700 >90	5
	911021B1	2000-3000K*	470 >90	9
		*only for phase-cut dim		

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.55kg

	CODE
	146320W0
	146320L0
	146320G0
	146320P0
	146320B0

OPTIONAL



PAR16 6.5W | GU10 | phase-cut dim

	CODE
	901228W3
	901228B3
	901228W5
	901228B5



DOCUS

Ceiling surface



2.0 LED


LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 21° SDCM3 L70|50K 0.92kg

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 1.01kg



OPTIONAL

inner cover max. 10W
aluminium | 2 pieces needed

	CODE
	911021W1
	911021G1
	911021B1

	CODE
	186458W_
	186458L_
	186458G_
	186458P_
	186458B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x670 >90	3
3000K	2x700 >90	5
2000-3000K	2x470 >90	9

	CODE
	146420W0
	146420L0
	146420G0
	146420P0
	146420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE	
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5




PRIVATE RESIDENCE | TOM BEIGE / *NESS HUNGARY



HEXO mini

Ceiling surface



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.15kg



OPTIONAL

inner reflector max. 10W
polycarbonate


	CODE
	900199W3
	900199G3
	900199Q3
	900199B3

	CODE
	258420W0
	258420G0
	258420Q0
	258420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE	
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5





HEXO

Ceiling surface



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 21° SDCM3 L70|50K 0.72kg

phase-cut dim

	CODE
	186558W_
	186558G_
	186558Q_
	186558P_
	186558B_

DALI

	CODE
	186559W_
	186559G_
	186559Q_
	186559P_
	186559B_




OPTIONAL

inner cover max. 10W
aluminium

CODE	LIGHT COLOUR	LUMEN CRI	CODE
911031W1	2700K	670 >90	3
911031G1	3000K	700 >90	5
911031B1	2000-3000K*	470 >90	9

*only for phase-cut dim



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.63kg

	CODE
	146520W0
	146520G0
	146520Q0
	146520P0
	146520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	901228W3
	901228B3
	901228W5
	901228B5



315 | 343 | 355

471



HEXO

Ceiling surface



2.0 LED

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 21° SDCM3 L70|50K 1.13kg

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 1.19kg



OPTIONAL

inner cover max. 10W
aluminium | 2 pieces needed

CODE
911031W1
911031G1
911031B1

CODE

186658W_
186658G_
186658Q_
186658P_
186658B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x670 >90	3
3000K	2x700 >90	5
2000-3000K	2x470 >90	9

CODE

146620W0
146620G0
146620Q0
146620P0
146620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



RAY mini

Ceiling surface

new




543

1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
incl. driver | aluminium

IP20 25° SDCM2 L80|55K 0.19kg

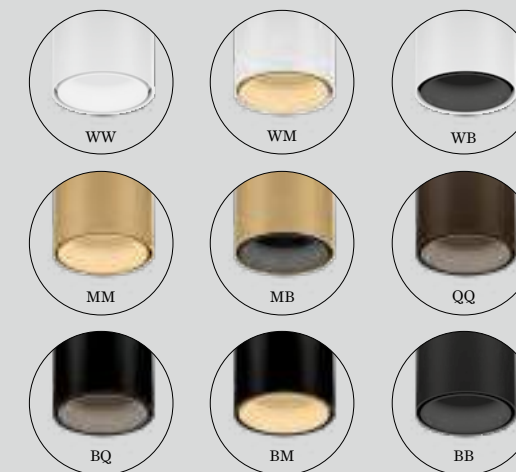

	CODE
	258254WW_
	258254WM_
	258254WB_
	258254MM_
	258254MB_
	258254QQ_
	258254BQ_
	258254BM_
	258254BB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	440 >90	3
3000K	470 >90	5

back



RAY mini

Ceiling surface



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.14kg



reflector

OPTIONAL

inner reflector max. 10W
polycarbonate

	CODE
	900199W4
	900199G4
	900199M4
	900199Q4
	900199B4

	CODE
	258220W0
	258220G0
	258220M0
	258220Q0
	258220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim



	CODE	
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5



HOTEL MÜHLE | DI RAINER SCHÖPF OBERGURGL | AUSTRIA

RAY

Ceiling surface



1.0 LED

LED COB 8W | dimmable
220-240VAC | 50-60Hz
aluminium

IP20 Δ 21° SDCM3 L70|50K 0.70kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.61kg

phase-cut dim

	CODE
	186758W_
	186758L_
	186758G_
	186758M_
	186758Q_
	186758P_
	186758B_

	CODE
	146720W0
	146720L0
	146720G0
	146720M0
	146720Q0
	146720P0
	146720B0



OPTIONAL

inner cover max. 10W
aluminium

	CODE	LIGHT COLOUR	LUMEN CRI	CODE
	911041W1	2700K	670 >90	3
	911041G1	3000K	700 >90	5
	911041M1	2000-3000K*	470 >90	9
	911041B1			


DALI

	CODE
	186759W_
	186759L_
	186759G_
	186759M_
	186759Q_
	186759P_
	186759B_

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	901228W3
	901228B3
	901228W5
	901228B5








IVAN ELTOFT NIELSEN REAL ESTATE AGENT | JULIE BRANDT | ANKER & CO HELLERUP | DENMARK



SOLID bijou

Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240V | 50-60Hz | incl. driver
aluminium

IP20 27° SDCM2 L80|50K 0.32kg

	CODE
	133864W_
	133864J_
	133864H_
	133864K_
	133864CH_
	133864B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	340 >90	5



SOLID petit

Ceiling surface



2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° A 31° SDCM2 L80|50K 0.42kg

CODE

	133964W_
	133964J_
	133964H_
	133964K_
	133964CH_
	133964B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	540	>90	3
3000K	570	>90	5
2000-3000K	440	>90	9



MORE BEAM ANGLES ONLINE
weverducre.com/more-solid-petit



1.0 LED

LED COB 12W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° 34° SDCM2 L80|50K 0.65kg

phase-cut dim

CODE	CODE
133764W_	133120W0
133764J_	133120J0
133764H_	133120H0
133764K_	133120K0
133764CH_	133120CH0
133764P_	133120P0
133764Q_	133120Q0
133764B_	133120B0

DALI-2 | push dim

CODE	CODE
133765W_	133120W0
133765J_	133120J0
133765H_	133120H0
133765K_	133120K0
133765CH_	133120CH0
133765P_	133120P0
133765Q_	133120Q0
133765B_	133120B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	745 >90	3
3000K	800 >90	5
2000-3000K	560 >90	9




MORE BEAM ANGLES ONLINE

weverducre.com/more-solid

SOLID

Ceiling surface



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-25°|355° 0.61kg

CODE	CODE
133120W0	133120W0
133120J0	133120J0
133120H0	133120H0
133120K0	133120K0
133120CH0	133120CH0
133120P0	133120P0
133120Q0	133120Q0
133120B0	133120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	CODE
901228W3	901228W3
901228B3	901228B3
901228W5	901228W5
901228B5	901228B5






TRACE

Ceiling surface




reddot winner 2023



373 | 399



517



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 A 27° SDCM2 L80|50K 0.40kg

CODE


	183164W_
	183164BL_
	183164CH_
	183164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	325 >90	3
3000K	340 >90	5



MORE BEAM ANGLES ONLINE



weverducre.com/more-trace





PIRRO petit

Ceiling surface

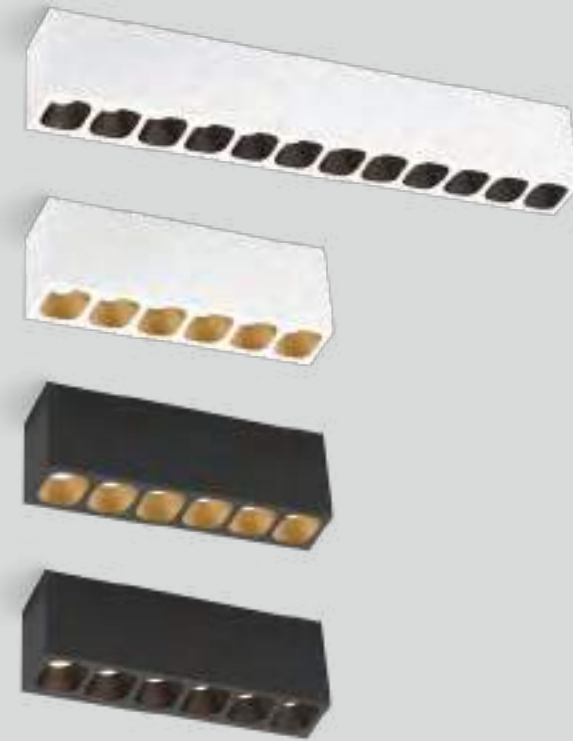


6.0

LED COB 13W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 \angle 28° SDCM3 L80|50K 0.21kg

CODE		
	129854E_	
	129854WM_	
	129854CH_	
	129854B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x135 >90	3
3000K	6x140 >90	5



12.0

LED COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 \angle 28° SDCM3 L80|50K 0.38kg



CODE		
	129954E_	
	129954WM_	
	129954CH_	
	129954B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	12x135 >90	3
3000K	12x140 >90	5



PIRRO SPOT

Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 A-32° SDCM2 L70|55K 0.20kg



honeycomb

OPTIONAL

honeycomb louver

CODE	LIGHT COLOUR	LUMEN CRI	CODE
90051131	2700K	360 >90	3
	3000K	380 >90	5

4.1

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 A-32° SDCM2 L70|55K 0.50kg

CODE	LIGHT COLOUR	LUMEN CRI	CODE
151564E_	2700K	4x360 >90	3
151564J_	3000K	4x380 >90	5

back






PRIVATE RESIDENCE | PADRON LUXURY LIVING BELGIUM

PIRRO SPOT


Ceiling surface



2.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


⊕ IP20 Λ 32° SDCM2 L70|55K 0.30kg



4.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


⊕ IP20 Λ 32° SDCM2 L70|55K 0.48kg



6.0

LED COB 29W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 Λ 32° SDCM2 L70|55K 0.80kg



OPTIONAL

honeycomb louver

90051131

CODE			
	151264E		151264J
	151264K		151264B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5

CODE			
	151464E		151464J
	151464K		151464B


LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5

CODE			
	151664E		151664J
	151664K		151664B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x360 >90	3
3000K	6x380 >90	5



back

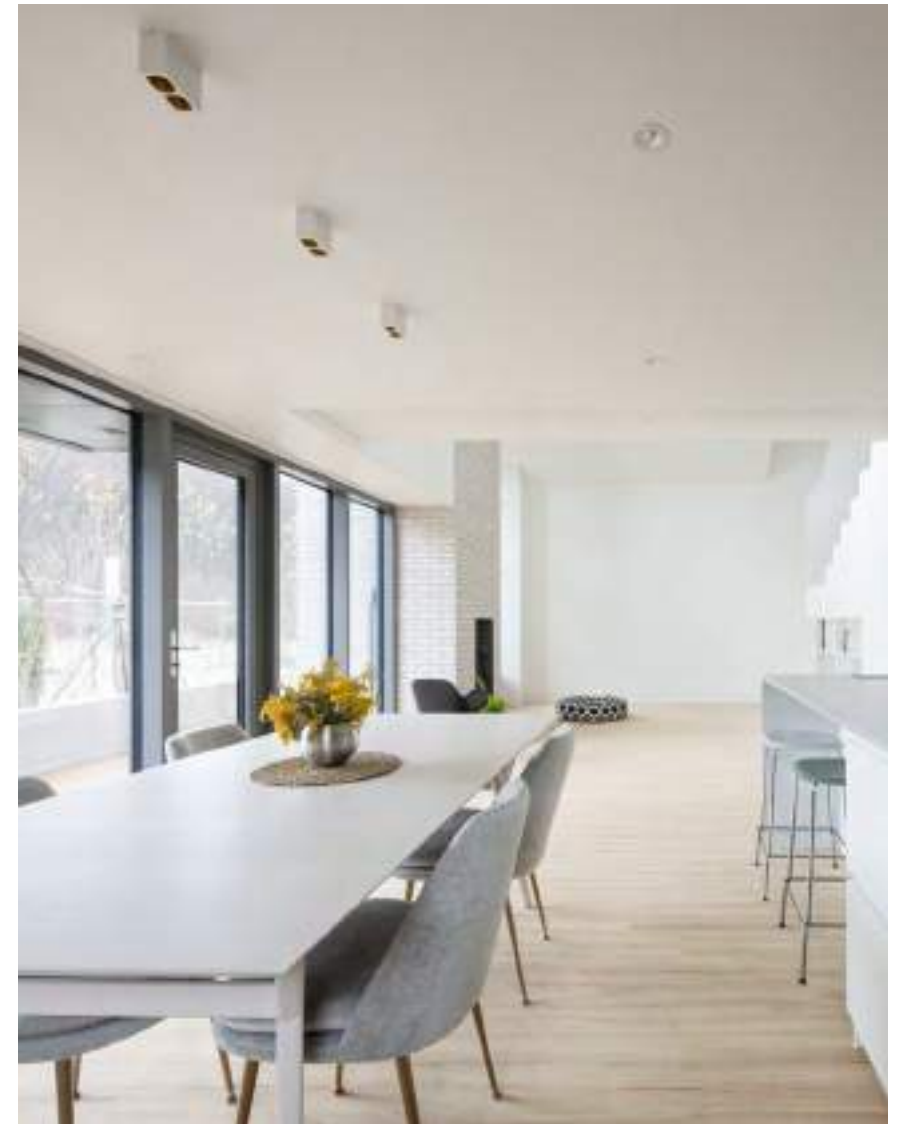




PRIVATE RESIDENCE | ORANEN & TURKLIN FINLAND

PIRRO OPAL

Ceiling surface




2.0

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 SDCM3 L80/60K 0.30kg

CODE	
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	290 >90	5




4.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 SDCM3 L80/60K 0.52kg

CODE	
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5




339 | 361



PLANO petit

Ceiling surface




1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.48kg

CODE
162564W_
162564E_
162564CH_
162564B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	490	>90	3
3000K	530	>90	5
2000-3000K	380	>90	9




2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-25°|355° 31° SDCM2 L70|55K 0.62kg

CODE
162664W_
162664E_
162664CH_
162664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x490	>90	3
3000K	2x530	>90	5
2000-3000K	2x380	>90	9



3.0

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


IP20 0°-25°|355° 31° SDCM2 L70|55K 0.85kg

CODE
162764W_
162764E_
162764CH_
162764B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	3x490	>90	3
3000K	3x530	>90	5
2000-3000K	3x380	>90	9







MORE BEAM ANGLES ONLINE
weverducre.com/more-plano-surface





PLANO

Ceiling surface



1.0 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-30°/355° A-34° SDCM2 L80|55K 1.15kg

2.0 LED

LED COB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-30°/355° A-34° SDCM2 L80|55K 1.62kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-30°/355° 1.39kg

2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-30°/355° 1.51kg

CODE
118564W_
118564E_
118564CH_
118564B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	570 >90	3
3000K	630 >90	5
2000-3000K	535 >90	9



MORE BEAM ANGLES ONLINE
weverducre.com/more-plano-surface

CODE
118520W_
118520E_
118520CH_
118520B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x570 >90	3
3000K	2x630 >90	5
2000-3000K	2x535 >90	9

CODE
118520W0
118520E0
118520CH0
118520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

CODE
118620W0
118620E0
118620CH0
118620B0

OPTIONAL



PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



SIRRO

Ceiling surface



1.0 LED

LED LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-35°/355° ∠ 34° SDCM2 L80/55K 0.85kg

CODE
189164W_
189164E_
189164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	715 >90	3
3000K	775 >90	5
2000-3000K	560 >90	9

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°/355° 0.81kg

CODE
139120W0
139120E0
139120B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



SIRRO

Ceiling surface




2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-35°/355° A34° SDCM2 L80|55K 1.57kg

CODE
189264W_
189264E_
189264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x715 >90	3
3000K	2x775 >90	5
2000-3000K	2x560 >90	9



2.0 PAR16

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium


IP20 0°-35°/355° 1.51kg

CODE
139220W0
139220E0
139220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



3.0 PAR16

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-35°/355° 1.91kg

CODE
139320W0
139320E0
139320B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5








LECA

Ceiling surface

new



109

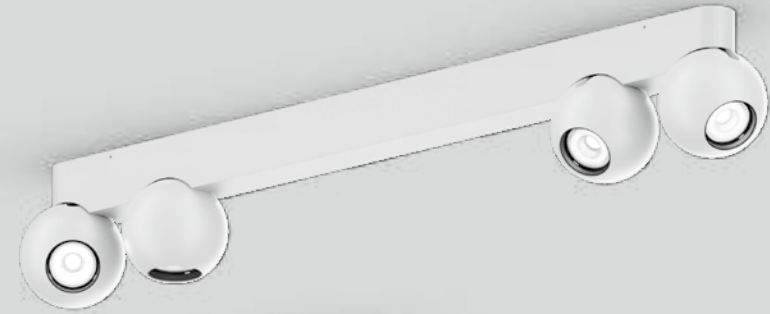

honeycomb

OPTIONAL

honeycomb louver

	CODE	90051131

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.40kg

2700K | CRI >90 | 510lm

	CODE	188264W3
		188264Q3
		188264B3

2.0

LED COB 17W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 0.74kg

2700K | CRI >90 | 2x510lm

	CODE	188364W3
		188364Q3
		188364B3


4.0

LED COB 34W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 1.50kg

2700K | CRI >90 | 4x510lm

	CODE	188464W3
		188464Q3
		188464B3



back



PRIVATE RESIDENCE | STUDIO ZUYD THE NETHERLANDS



MATCH



Ceiling surface



reddot winner 2023



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0

LED COB9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° A30° SDCM2 L80|50K 0.24kg

2.0

LED COB18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


IP20 0°-90°/350° A30° SDCM2 L80|50K 0.42kg



CODE	
	177154W_
	177154BL_
	177154B_

CODE	
	177254W_
	177254BL_
	177254B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	560 >90	5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x535 >90	3
3000K	2x560 >90	5



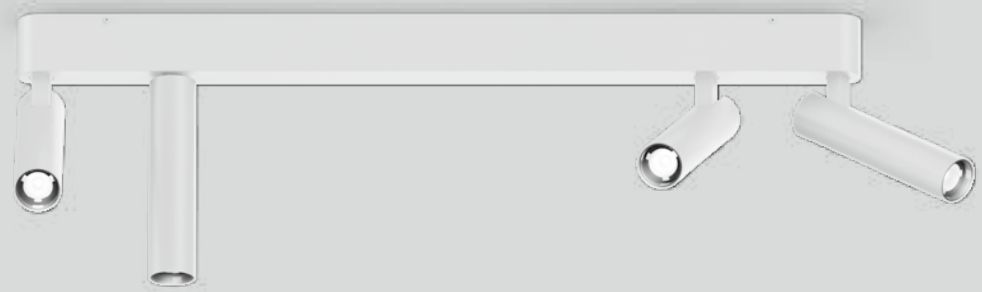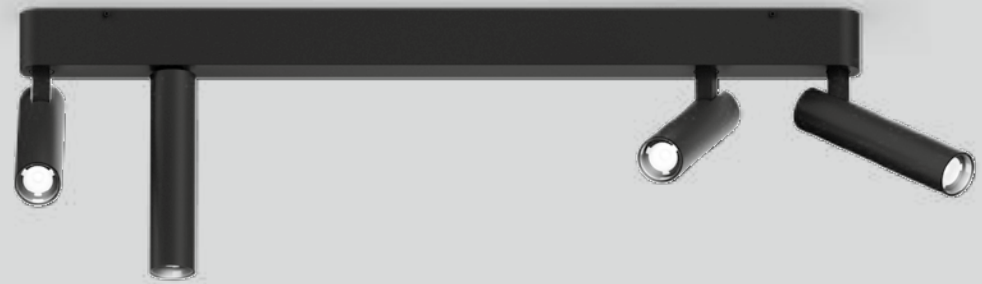


MATCH

Ceiling surface

new

57 | 113 | 145



4.0

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° A30° SDCM2 L80|50K 0.86kg

CODE	
	177454W_
	177454B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x535 >90	3
3000K	4x560 >90	5

back




CENO

Ceiling surface





As awarded by The Chicago Athenaeum: Museum of Architecture and Design



303 | 353



513



1.0


LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° ∠ 31° SDCM2 L70|55K 0.21kg

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° ∠ 31° SDCM2 L70|55K 0.43kg



OPTIONAL

honeycomb louver



CODE	
	176664W_
	176664Q_
	176664K_
	176664B_

CODE	
	176764W_
	176764Q_
	176764K_
	176764B_

CODE	LIGHT COLOUR	LUMEN CRI	CODE
90051131	2700K	470 >90	3
	3000K	500 >90	5

CODE	LIGHT COLOUR	LUMEN CRI	CODE
	2700K	2x470 >90	3
	3000K	2x500 >90	5



back





CENO

Ceiling surface


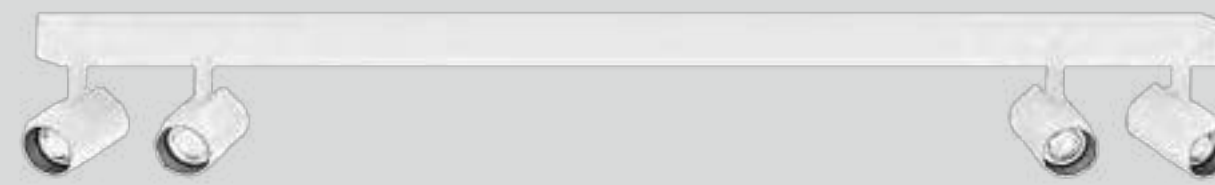


119

303 | 353



513



4.0


LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° A 31° SDCM2 L70|55K 0.95kg

4.1

LED COB 30W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°|350° A 31° SDCM2 L70|55K 0.78kg



OPTIONAL
honeycomb louver



	CODE
	176864W_
	176864Q_
	176864K_
	176864B_

CODE
90051131

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x470 >90	3
3000K	4x500 >90	5

	CODE
	176964W_
	176964Q_
	176964K_
	176964B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x470 >90	3
3000K	4x500 >90	5

back



CENO

Ceiling surface

new




119



303 | 353




513

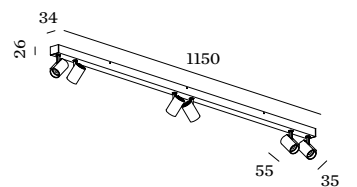

6.0

LED COB 42W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° A 31° SDCM2 L70/55K 1.10kg



honeycomb

OPTIONAL

honeycomb louver



CODE
90051131

CODE
176064W_
176064Q_
176064B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x470 >90	3
3000K	6x500 >90	5



BLIEK petit


Ceiling surface



reddot winner 2023




123



2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-60°/355° A 31° SDCM2 L70/55K 0.65kg



honeycomb

OPTIONAL

honeycomb louver



CODE

90051131


CODE

164664W_

164664CH_

164664B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x470	>90	3
3000K	2x500	>90	5
2000-3000K	2x355	>90	9



back



MICK


Ceiling surface



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



reddot winner 2020 lighting design




1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° 23° SDCM2 L80|50K 0.35kg

CODE	
	159144J_
	159144K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	435 >90	5



2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 0°-90°/350° 23° SDCM2 L80|50K 0.62kg

CODE	
	159244J_
	159244K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x225 >90	3
3000K	2x245 >90	5



► DESIGN WITH LOVE


back



MARBELLA DESIGN & ART FAIR | MARISA GALLO | INTERIORISMO STUDIO MARBELLA | SPAIN

SARA on base

Ceiling surface



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium


⊕ IP20 0°-90° 0.23kg

CODE	
	157220W0
	157220G0
	157220K0
	157220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



1.1

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium


⊕ IP20 0°-90°/330° 0.32kg

CODE	
	157420W0
	157420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium


⊕ IP20 0°-90°/330° 0.74kg

CODE	
	157520W0
	157520B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5






PRIVATE RESIDENCE | CBA & MAX BAUER - CBA.LU - BAUERGROUP.LU LUXEMBOURG

SQUBE on base

Ceiling surface




1.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90° ∠ 39° SDCM3 L70|55K 0.43kg

CODE	
white	144268W_
black	144268B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	430 >90	5
1800-3000K	350 >80	9




1.1 LED

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90° ∠ 32° SDCM3 L70|55K 0.44kg

CODE	
white	144468W_
black	144468B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	940 >90	3
3000K	970 >90	5
1800-3000K	640 >80	9



1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90° 0.43kg

CODE	
white	144220W0
black	144220B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



337 | 351









SQUBE on base

Ceiling surface



2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90°/355° 0.58kg

3.0

3x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0°-90°/355° 0.93kg

CODE

144520W0
144520B0

CODE

144620W0
144620B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



337 | 351




THESE TWO MAKE ALL YOUR WISHES COME TRUE

Our *magic sticks*

Wouldn't it be nice to have two magic wands instead of one? This wish can easily come true with our SPIN variants. The two swivelling arms can be flexibly adapted to any situation, ensuring perfect illumination at all times. The great thing is that all three can be combined with different designs, offering endless design options. Those who prefer soft, indirect light can create a warm, Scandinavian-inspired atmosphere with SPIN PERLEZ. For a more minimalist look and direct, downward-directed light, small spotlights such as TRACE are ideal. Would you also like to creatively stage your walls? Then you can even create your own work of art with FIL SPIN wall surface.

Wäre es nicht schön, wenn man statt eines Zauberstabs gleich zwei davon hätte? Mit unseren SPIN-Varianten lässt sich dieser Wunsch ganz leicht erfüllen. Denn die beiden schwenkbaren Arme passen sich ganz flexibel an jede Situation an und sorgen so immer für die perfekte Ausleuchtung. Das Schöne daran: Alle drei lassen sich mit verschiedenen Designs kombinieren und bieten so unendlich viele Gestaltungsmöglichkeiten. Wer eher sanftes, indirektes Licht bevorzugt, kann mit SPIN PERLEZ eine warme, skandinavisch inspirierte Atmosphäre erzeugen. Für einen eher minimalistischen Look und direktes, nach unten gerichtetes Licht sind kleine Spots wie die von TRACE optimal. Sie möchten auch Ihre Wände kreativ in Szene setzen? Dann können Sie mit FIL SPIN Wall Surface sogar Ihr eigenes Kunstwerk gestalten.

FIL SPIN	Ceiling surface	p. 251
TRACE SPIN	Ceiling surface	p. 253
PERLEZ SPIN	Ceiling surface	p. 255
FIL SPIN	Wall surface	p. 615

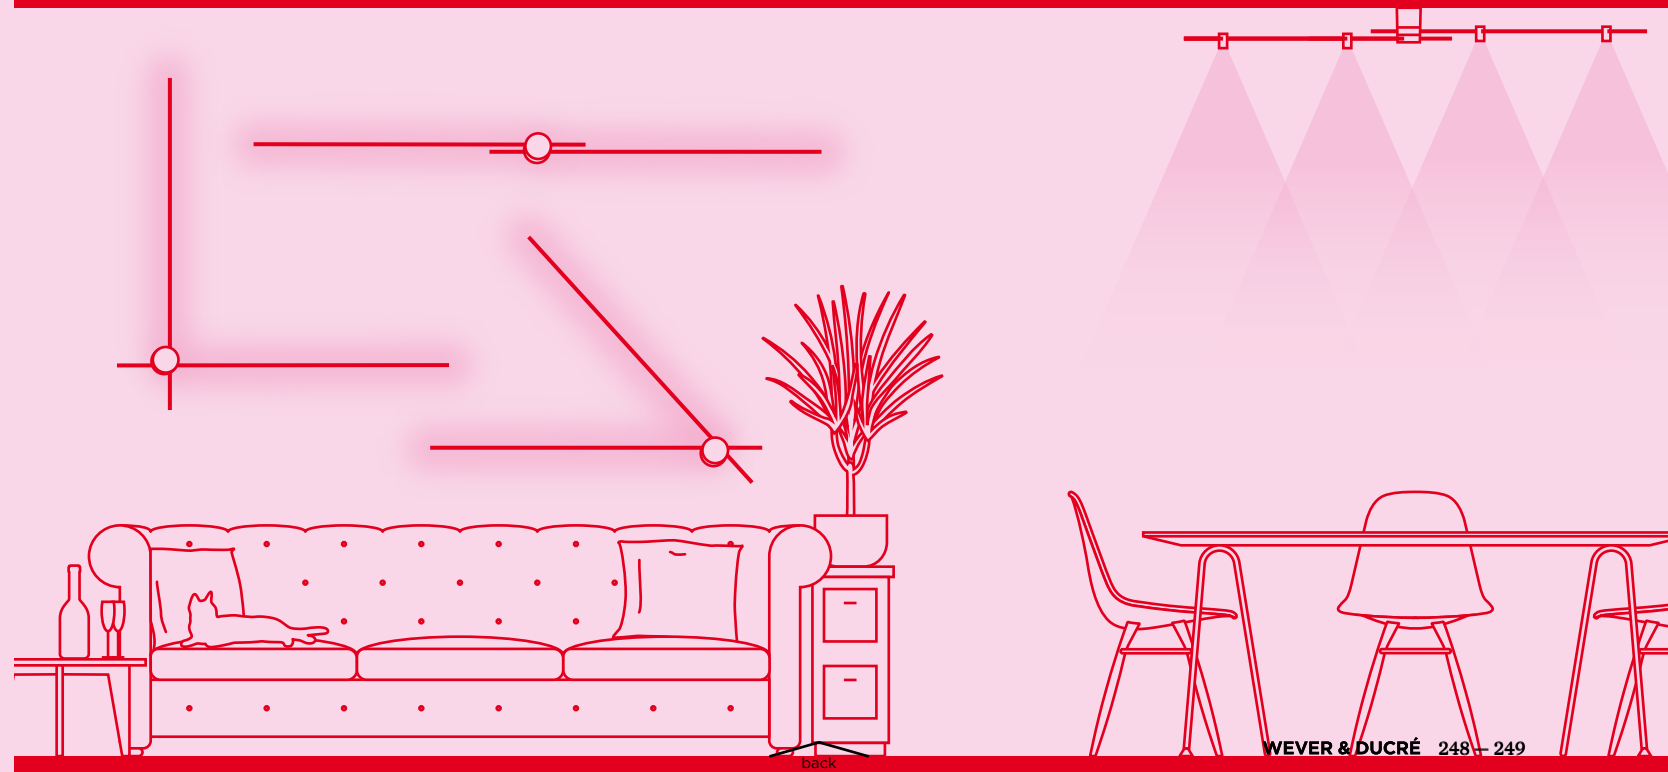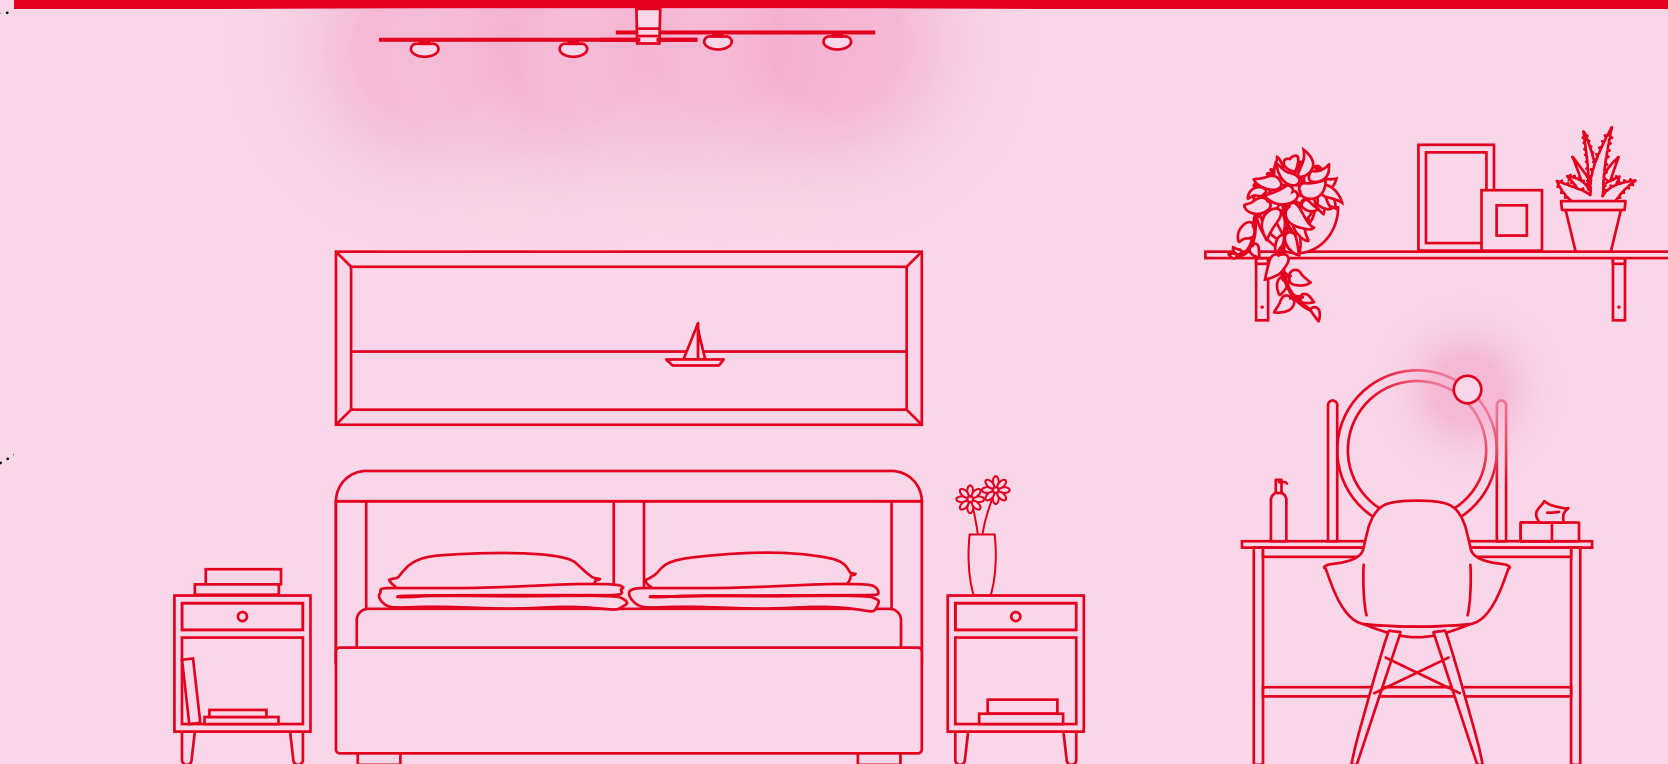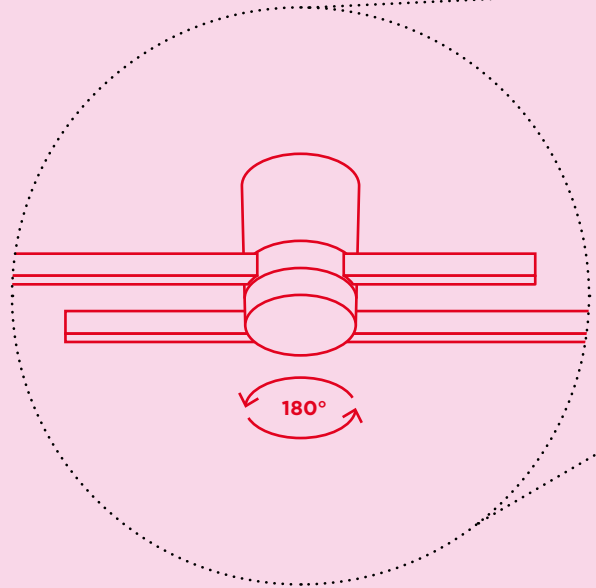

back




Ⓟ

FIL SPIN


Ceiling surface

new

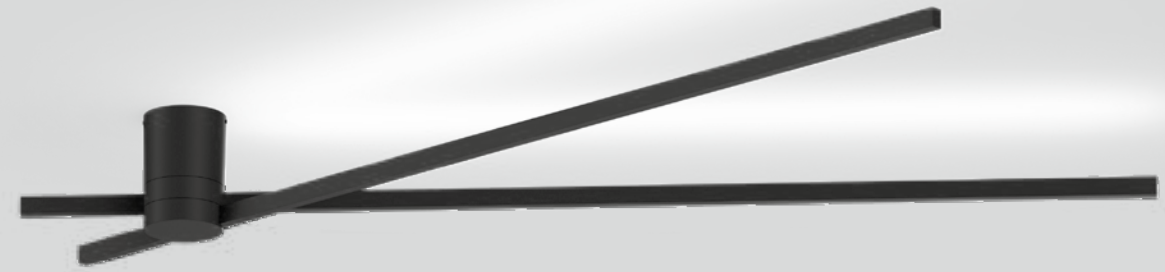

383

615



1.0


LED LED PCB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

⊕ IP20 180° SDCM2 L80|50K 1.00kg

2700K | CRI >90 | 2x1050lm

CODE

254584B3



back

WEVER & DUCRÉ 250 – 251



Ⓟ

TRACE SPIN


Ceiling surface

new



373 | 399

517

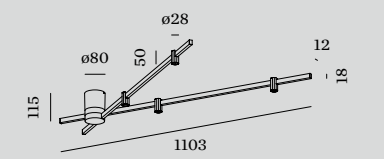

1.0


LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 180° Δ 30° SDCM2 L80|50K 1.10kg

2700K | CRI >90 | 4x430lm

CODE

183264CH3
183264B3





back




TRACE GRID

Ceiling surface



new

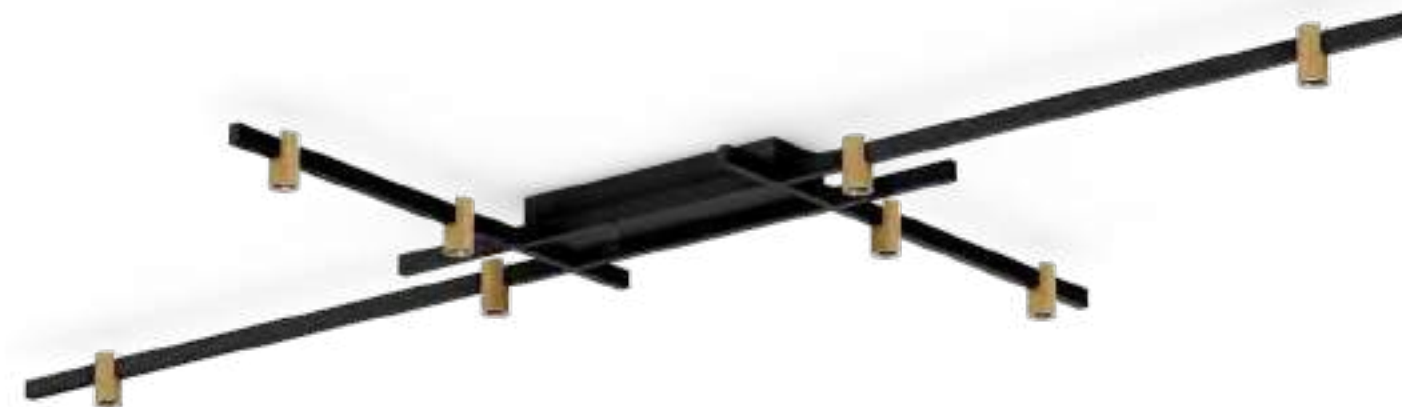

373 | 399



517



1.0

LED COB 40W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
direct light

IP20 Δ 30° SDCM2 L80/50K 1.50kg

2700K | CRI >90 | 8x400lm

CODE
183364CH3
183364B3

2.0

LED PCB/COB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
dir./indir. light

IP20 Δ 30° SDCM2 L80/50K 1.41kg

2700K | CRI >90 | 4x400/2x340lm

CODE
183464CH3
183464B3



back



PERLEZ GRID

Ceiling surface

new

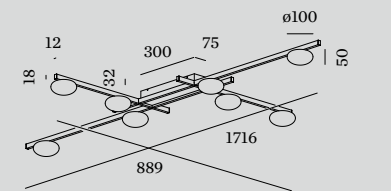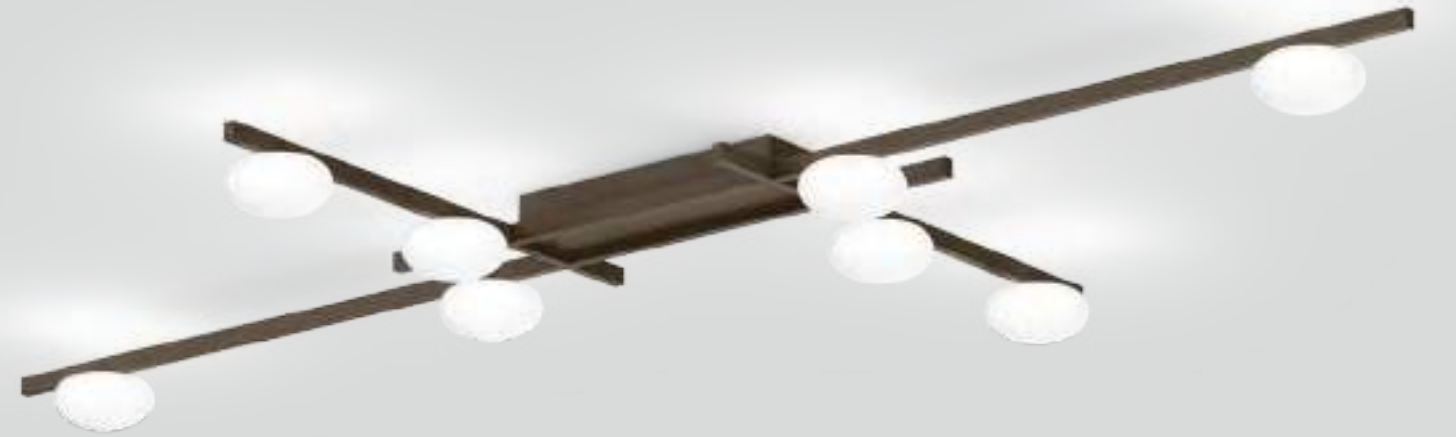

1.0

LED COB 40W | phase-cut dim
 220-240VAC | 50-60Hz | incl. driver
 aluminium | opal glass
 direct light

IP20 SDCM2 L80I50K 2.34kg

2700K | CRI >90 | 8x220lm

	CODE
	192884QW3
	192884BW3




back



OFFICE RPD | VIVA ARCHITECTURE ANTWERP | BELGIUM

VENN

Ceiling surface

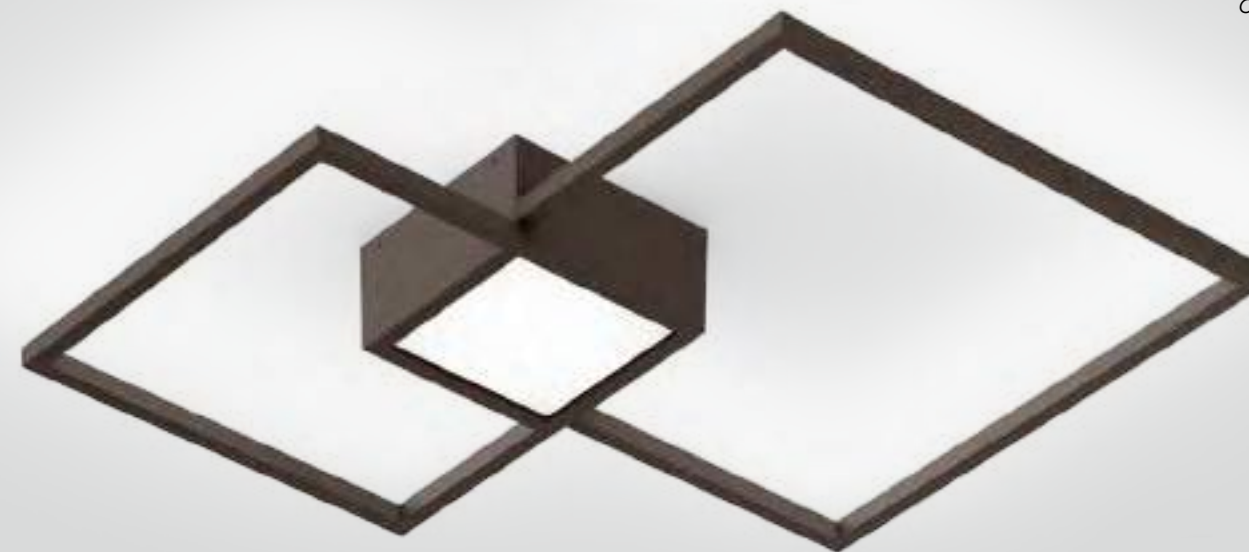

1.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover indirect light

IP20 SDCM3 L70|55K 2.50kg

2.0

LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover dir./indir. light

IP20 SDCM3 L70|55K 2.50kg

CODE
149184W_
149184Q_
149184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2950 >80	2
3000K	3140 >80	4

CODE
149284W_
149284Q_
149284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/2950 >80	2
3000K	580/3140 >80	4




CREATE YOUR OWN VENN
weverducre.com/venn-configurator



DRO



Ceiling surface

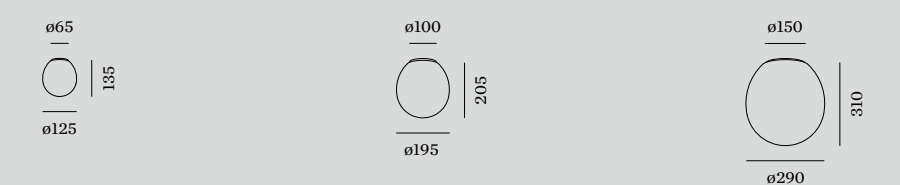

- 1.0**
 QT14 max. 5W | G9
 220-240VAC | 50-60Hz
 aluminium
 artisanal Italian hand blown glass
 IP20 0.32kg
- 2.0**
 C35 max. 6W | E14
 220-240VAC | 50-60Hz
 aluminium
 artisanal Italian hand blown glass
 IP20 0.89kg
- 3.0**
 A60 max. 12W | E27
 220-240VAC | 50-60Hz
 aluminium
 artisanal Italian hand blown glass
 IP20 1.96kg

CODE	CODE	CODE
1721G0WB0	1722C0WB0	1723E0WB0


OPTIONAL		OPTIONAL		OPTIONAL	
QT14 3W G9 phase-cut dim clear		C35 5.5W E14 phase-cut dim opal		A60 9W E27 phase-cut dim opal	
CODE	CODE	CODE	CODE	CODE	CODE
2700K 300lm	9010G802	2700K 450lm	9003C103	2700K 800lm	9003E152
3000K 280lm	9010G804				





WIRO

Ceiling surface



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 0.78kg

	CODE
	2086E0V0
	2086E0B0


OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel


⊕ IP20 1.66kg

	CODE
	2082E0V0
	2082E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel


⊕ IP20 1.56kg

	CODE
	2080E0V0
	2080E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



3.8 WIRO

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 2.71kg

	CODE
	2083E0V0
	2083E0B0

OPTIONAL




T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



MIRRO

Ceiling surface



1.0

◁ A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

⊕ IP20 0.70kg

2.0

◁ G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

⊕ IP20 1.00kg

3.0

◁ G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium
one side reflective composite panel

⊕ IP20 2.10kg

CODE	
	6321E0GB0
	6321E0NB0
	6321E0LB0

CODE	
	6322E0GB0
	6322E0NB0
	6322E0LB0

CODE	
	6323E0GB0
	6323E0NB0
	6323E0LB0

OPTIONAL

A60 5.1W | E27 | phase-cut dim
gold mirror

CODE	
2700K 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

CODE	
2700K 409lm	9003E140

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142



G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



MIRRO SOFT

Ceiling surface



2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material

IP20 0.67kg

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material

IP20 1.20kg

CODE	
	6322E0MF0
	6322E0LF0
	6322E0IF0
	6322E0AF0

CODE	
	6323E0MF0
	6323E0LF0
	6323E0IF0
	6323E0AF0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
clear

CODE	
2700K 483lm	9003E160

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
clear


CODE	
2700K 483lm	9003E160





CLEA

Ceiling surface




1.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 SDCM2 L80|50K 0.78kg

CODE
181184W_
181184LS_
181184SG_
181184FJ_
181184B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	810 >90	3
3000K	835 >90	5




2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 SDCM2 L80|50K 1.31kg

CODE
181284W_
181284LS_
181284SG_
181284FJ_
181284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	810 >90	3
3000K	835 >90	5

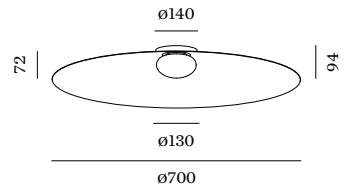


3.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 SDCM2 L80|50K 2.09kg

CODE
181384W_
181384LS_
181384SG_
181384FJ_
181384B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	810 >90	3
3000K	835 >90	5




back



J.J.W.

Ceiling surface



O3

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20 4.00kg

	CODE
	2051E0S0
	2051E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138



URBAN SPACES | STUDIO KOMO STUTTGART | GERMANY

ROOMOR OFFICE



Ceiling surface



reddot winner 2021



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 SDCM3 L80/60K UGR ≤ 19/65° 4.22kg

3000K | CRI >90 | 3660lm

CODE

1683M5W5


1683M5B5

4000K | CRI >90 | 3660lm

CODE

1683M5W7

1683M5B7



1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal PMMA cover

IP20 SDCM3 L80/60K 4.22kg

3000K | CRI >90 | 3700lm

CODE

168385W5

168385B5

4000K | CRI >90 | 3700lm

CODE

168385W7

168385B7




FINLIN

Ceiling surface



reddot winner 2023



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser


IP20 SDCM3 L80|50K 0.42kg

CODE	
	174184W_
	174184CH_
	174184B_

OPTIONAL

cover plate adapter for concrete housing			
CODE			
	900194B0		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	430 >90	3
3000K	440 >90	5



2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.43kg

CODE	
	174284W_
	174284CH_
	174284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >90	3
3000K	670 >90	5



3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.44kg

CODE	
	174384W_
	174384CH_
	174384B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	870 >90	3
3000K	890 >90	5



PERLEZ IP44

Ceiling surface


new



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass


IP44 SDCM3 L80|50K 0.39kg



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 SDCM3 L80|50K 0.49kg



3.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass

IP44 SDCM3 L80|50K 0.67kg

CODE
192484W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	510 >95	3
3000K	540 >95	5

CODE
192584W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	560 >95	3
3000K	590 >95	5

CODE
192684W_





LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >95	3
3000K	650 >95	5

back



TAIO IP65

Ceiling surface



1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 105° SDCM2 L80|55K 0.53kg

CODE	
	180884W_
	180884B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	480 >90	5

[back](#)



PRIVATE RESIDENCE | IMORE INTERIEURARCHITECTUUR BELGIUM



MIRBI IP44


Ceiling surface



157



643



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal
PMMA cover

⊕ IP44 SDCM3 L80I60K 0.4kg

3000K | CRI >90 | 660lm

CODE
175488W5
175488BW5


2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and opal
PMMA cover

⊕ IP44 SDCM3 L80I60K 0.5kg

3000K | CRI >90 | 660lm


CODE
175588W5
175588BW5





ROB IP44

Ceiling surface




1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 0.70kg

CODE
701188W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1170 >90	3
3000K	1220 >90	5




2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.20kg

CODE
701288W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1800 >90	3
3000K	1810 >90	5



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

IP44 SDCM3 L80|60K 1.90kg

CODE
701388W_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	3340 >90	3
3000K	3360 >90	5





ROBY IP44


Ceiling surface




1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.00kg

CODE	
	135188W_
	135188B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1080 >90	3
3000K	1130 >90	5




2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.55kg

CODE	
	135288W_
	135288B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1670 >90	3
3000K	1680 >90	5



3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 2.45kg


CODE	
	135388W_
	135388B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3090 >90	3
3000K	3010 >90	5



TOWNA IP44


Ceiling surface



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover


IP44 SDCM3 L80|60K 1.15kg



2.0

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover





IP44 SDCM3 L80|60K 3.35kg



3.0

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | steel
opal PMMA cover

IP44 SDCM3 L80|60K 3.00kg



CODE			
	178188W_		178188J_
	178188K_		178188Z_
	178188B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1070 >90	3
3000K	1110 >90	5

CODE			
	178288W_		178288J_
	178288K_		178288Z_
	178288B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1650 >90	3
3000K	1660 >90	5

CODE			
	178388W_		178388J_
	178388K_		178388Z_
	178388B_		

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3050 >90	3
3000K	3060 >90	5

STREX TRACKS




48V TRACKS
295

CENO
303

MATCH
307

MICK
309

BOX
311



DOCUS
313

HEXO
315

RAY
317

DOTS LIGHT MODULE
319

OPAL LIGHT MODULE
319

MATCH
321



ODREY
323

SOLLI
329

1-PHASE TRACKS



1-PHASE TRACKS
331

SARA
333

SQUBE
337

PIRRO SPOT
339

PIRRO OPAL
339




DRO
341

HEXO
343

RAY
343

ODREY
345

3-PHASE TRACKS



3-PHASE TRACKS
349

SQUBE
351

CENO FORT
353

HEXO
355

RAY
355



ROOMOR OFFICE
357

PIRRO SYSTEM



PIRRO SYSTEM
361

ELLO SYSTEM



ELLO SYSTEM
363

ILANE



ILANE
367

THREE WAYS TO MAKE THEM SHINE

On the *right* track

It's normal to go off the rails when it comes to tracks. That's why we need a quick introduction. You can essentially choose between three options. The simplest is the 1-phase track. This system controls light sources from one point and switches them all on and off together. You'd prefer to operate each luminaire individually? Then we recommend the 3-phase track, where spotlights, insets, and suspended luminaires are connected and controlled separately. But there's also the 48-volt system. It allows spotlights and suspended luminaires, and also various sets of spots and opal insets for general lighting, to be inserted with ease. This means you can always react flexibly to changes in the room. The system can be easily controlled by your smartphone, which is especially practical.

Dass man bei Schienen erst mal Bahnhof versteht, ist ganz normal. Deshalb gibt's hier eine schnelle Einführung: Grundsätzlich können Sie zwischen drei Möglichkeiten wählen. Die einfachste ist die 1-Phasen-Schiene, bei der alle Lichtquellen von einem Punkt aus angesteuert und zusammen ein- und ausgeschaltet werden. Sie möchten Ihre Leuchten einzeln bedienen? Dann empfiehlt sich eine 3-Phasen-Schiene, bei der Strahler, Insets und Hängeleuchten separat angeschlossen und gesteuert werden. Weiters im Programm: das 48-Volt-System. Mit ihm lassen sich nicht nur Strahler oder Hängeleuchten, sondern auch verschiedene Spots- und Opalinsets – zur Allgemeinbeleuchtung ganz einfach einsetzen. So kann jederzeit flexibel auf Veränderungen im Raum reagiert werden. Besonders praktisch: das System lässt sich ganz bequem vom Smartphone aus steuern.



weverducre.com/strex-configurator

	STREX system 48V DALI page 295	1-Phase tracks 220-240V page 331	3-Phase tracks 220-240V page 349
1 Choose your <i>mounting</i>	<p>recessed surface suspended suspended indirect</p>	<p>recessed surface suspended</p>	<p>surface suspended</p>
2 Install it in <i>your layout</i>			
3 Choose your <i>driver</i>	<p>remote inline in track ceiling</p>		
4 Combine it <i>with insets</i>			

For more support and an extended layout of track systems, please check our FAQ section at weverducre.com/faq

Choose your *mounting*



weverducre.com/strex-configurator

Discreetly concealed in the ceiling, as a striking surface-mounted variant, or rather floating freely in the room? With three different mounting options, you'll find the right solution for every room. Our tip: Simply draft a small project sketch and make a brief note of where you want to install the track and which areas you want to emphasise. This will immediately give you a better overview.



Dezent in der Decke versteckt, als markante Aufbau-Variante oder doch lieber frei im Raum schwebend? Mit drei unterschiedlichen Montage-möglichkeiten findet man für jeden Raum die passende Lösung. Unser Tipp: Machen Sie sich einfach eine kleine Projektskizze und notieren Sie kurz, wo Sie die Schiene montieren und welche Bereiche Sie betonen möchten. Das schafft sofort mehr Überblick.

Custom cut available



Have a look on page 821 or browse online: weverducre.com/strex-custom

Ceiling recessed



M | MOUNTING BRACKET

recessed mounting bracket
for 1m - 2pcs needed | for 2m - 4pcs needed | for 3m - 6pcs needed

STREX RECESSED

track 48V | 15A | DALI

SELV 31-33 65 5-25



CODE
90014193

CODE	Length	Code
90014187	1m	90014187
90014188	1m	90014188
90014189	2m	90014189
90014190	2m	90014190
90014191	3m	90014191
90014192	3m	90014192

E | END CAP

CODE	Code
90014149	90014149
90014150	90014150

Ceiling surface



STREX SURFACE

track 48V | 15A | DALI



SELV

CODE	Length	Code
90014181	1m	90014181
90014182	1m	90014182
90014183	2m	90014183
90014383	2m	90014383
90014384	2m	90014384
90014184	2m	90014184
90014185	3m	90014185
90014385	3m	90014385
90014386	3m	90014386
90014186	3m	90014186

E | END CAP

CODE	Code
90014147	90014147
90014347	90014347
90014348	90014348
90014148	90014148

Ceiling suspended



STREX SUSPENDED

track 48V | 15A | DALI

SELV

CODE	Length	Code
90014181	1m	90014181
90014182	1m	90014182
90014183	2m	90014183
90014383	2m	90014383
90014384	2m	90014384
90014184	2m	90014184
90014185	3m	90014185
90014385	3m	90014385
90014386	3m	90014386
90014186	3m	90014186

STREX SUSP. INDIRECT

track 48V | 15A | DALI | with indirect light | 3.0m suspension sets already included | 15W/m

SELV

CODE	Length	Code
90014181	1m	90014181
90014182	1m	90014182
90014183	2m	90014183
90014383	2m	90014383
90014384	2m	90014384
90014184	2m	90014184
90014185	3m	90014185
90014385	3m	90014385
90014386	3m	90014386
90014186	3m	90014186

S | SUSPENSION SET

complete suspension set | incl. ceiling fixation bracket | not needed for indirect light version | for 1m - 2pcs needed | for 2m - 3pcs needed | for 3m - 4pcs needed

stainless steel colour


CODE	Length	Code
90014160	max. 1.5m	90014160
90014161	max. 3m	90014161

black colour

CODE	Length	Code
90014274	max. 1.5m	90014274
90014275	max. 3m	90014275

E | END CAP

CODE	Code
90014147	90014147
90014347	90014347
90014348	90014348
90014148	90014148






back

Install it in your layout



weverducre.com/strex-configurator

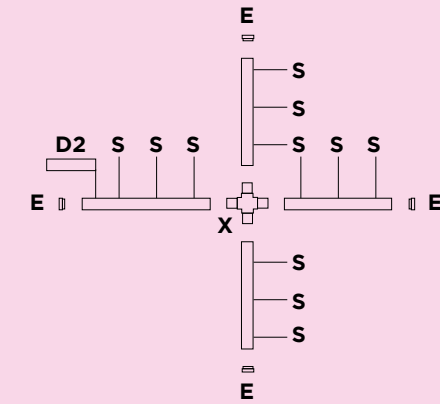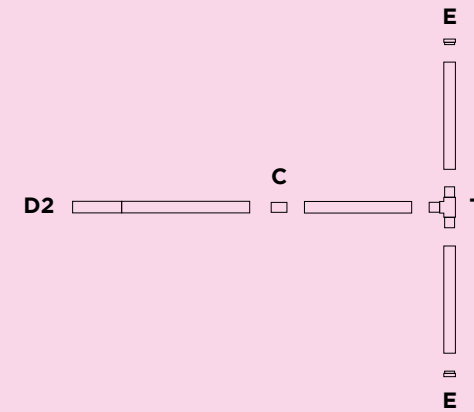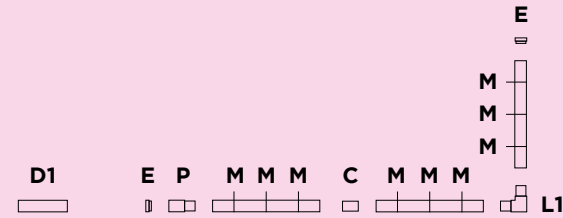


M | S | E
Choose your mounting
on page 295

D | P
Choose your driver | power feed
on page 299


Good to know
Electrical components of champagne
or bronze connectors and drivers will
be black.

All mountings



BLANK COVER

	CODE
2m	911002W0
2m	911002B0




C | CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014196
	90014197


Ceiling recessed



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right

	CODE
	90014251
	90014252




L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation

	CODE
	90014256
	90014257


Ceiling surface / suspended



L1 | L-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector left and right


	CODE
	90014198
	90014398
	90014399
	90014199



L2 | L-CONNECTOR NON ELECTRICAL

only needed 1x for square installation


	CODE
	90014258
	90014458
	90014459
	90014259



T | T-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector


	CODE
	90014292
	90014293



X | X-CONNECTOR

48V | 15A | DALI | electrical/
mechanical connector

	CODE
	90014295
	90014294



back

Choose your *driver*


A driver regulates the current flowing through your LED lights, preventing overheating and unwanted flickering. Which is best suited to your STREX system depends on the chosen installation. The most elegant solution is an in-track driver, but many other variants are also available.

Ein Treiber reguliert den Stromfluss, der durch Ihre LED-Leuchten fließt und verhindert damit Überwärmung und störendes Flackern. Welcher am besten zu Ihrem STREX-System passt, hängt von der gewählten Montage ab. Die eleganteste Lösung ist ein In-Track-Treiber aber auch viele andere Varianten sind möglich.

Good to know

Electrical components of champagne or bronze connectors and drivers will be black.

Ceiling recessed / surface

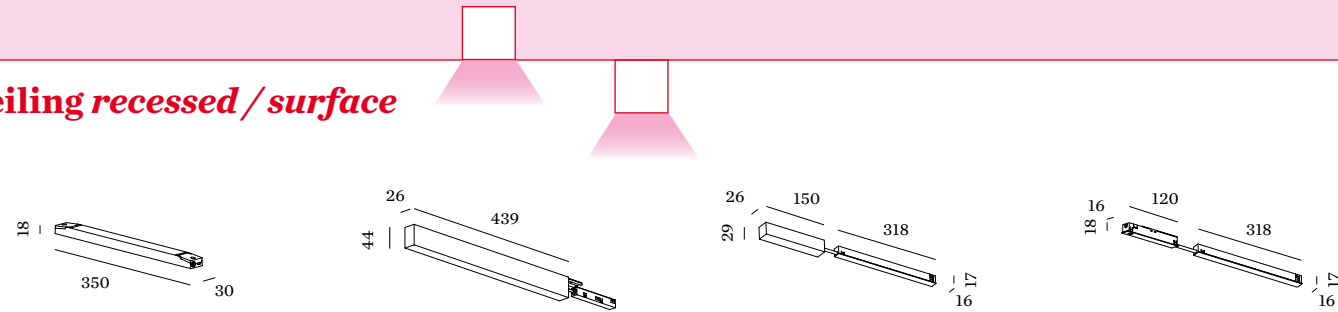

D1 | REMOTE DRIVER

remote converter | 220-240VAC 50-60Hz | 48V | for connection to power feed adapter




CODE

100W 48V	90218901
150W 48V	90218902

for DALI SELV solution see page 821

D2 | IN LINE DRIVER SURFACE

220-240VAC | 50-60Hz | 48V incl. power end feed adapter incl. DALI through wiring



CODE

100W	90014366
100W	90014367
150W	90014370
150W	90014371

D3 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V incl. power end feed function with in line connection box




CODE

100W	90014178
100W	90014378
100W	90014376
100W	90014176


D4 | IN TRACK DRIVER SURFACE

220-240VAC | 50-60Hz | 48V incl. power middle/end feed function with in track connection



CODE

100W	90014144
100W	90014143




P | POWER FEED

48V | 15A | DALI | end/middle power feed adapter | max. 4 x 1.5mm²


CODE

90014153
90014154



CODE


250W	90014179
250W	90014379
250W	90014377
250W	90014177



CODE


250W	90014146
250W	90014145

Ceiling suspended

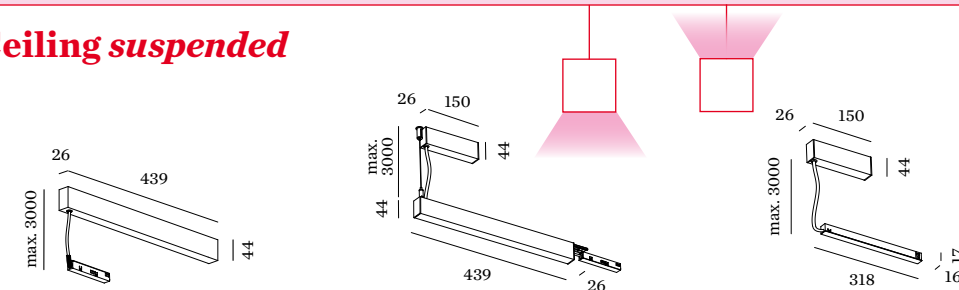

D1 | CEILING DRIVER

220-240VAC | 50-60Hz | 48V incl. power middle/end feed adapter incl. DALI through wiring driver ceiling mounted




CODE

100W	90014368
100W	90014369
150W	90014372
150W	90014373

D2 | IN LINE DRIVER

220-240VAC | 50-60Hz | 48V incl. power end feed adapter incl. DALI through wiring suspended driver in line with profile




CODE

100W	90014360
100W	90014361
150W	90014362
150W	90014363


D3 | IN TRACK DRIVER

220-240VAC | 50-60Hz | 48V incl. power end feed function incl. 3m power cable suspended driver in the profile



CODE

100W	90014157
100W	90014174



CODE

250W	90014158
250W	90014175


Ready to plan your **STREX?**




weverducre.com/strex-configurator

HOW TO CONTROL MY STREX SYSTEM

What about *control and dim*

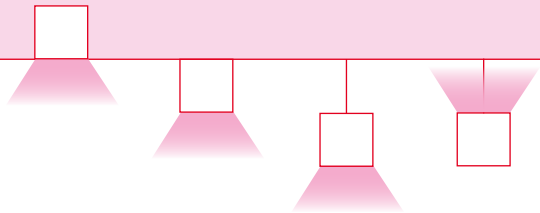

All mountings



WIRELESS CASAMBI CONTROL

8W | adapter for wireless control of 64 DALI fixtures in max. 8 groups

	CODE
	90014155
	90014156


The great thing about the STREX system? You have endless options. Do you just want to switch your lights on and off, or dim them? Then this can be done easily with DALI fixtures. If you don't want to install a hard-wired system, you can also opt for a more flexible version. All you need is a Casambi control module and suitable DALI insets.

Das Tolle am STREX-System? Man hat unendlich viele Möglichkeiten. Sie möchten Ihre Leuchten nur an- und ausschalten oder dimmen? Dann ist das mit DALI-Leuchten ganz easy möglich. Wer kein fest verkabeltes System installieren möchte, kann aber auch auf eine flexiblere Variante ausweichen. Was man dazu braucht? Ein Casambi-Kontrollmodul und passende DALI-Insets.




Via Casambi app


To discover all features and functionalities of the app, visit the casambi website: casambi.com or download the app directly.

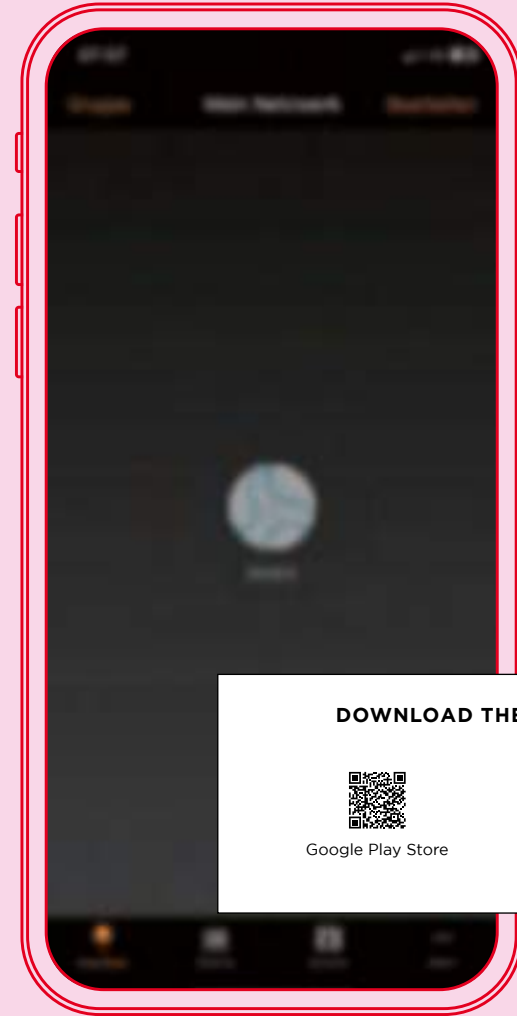

DOWNLOAD THE CASAMBI APP



Google Play Store





App Store

Create a *scene* for your individual lighting solution.



CENO on STREX

48V system



1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°|355° A 31° SDCM2 L70|55K 0.11kg

non dim

	CODE
	166562W_
	166562BQ_
	166562K_
	166562CH_
	166562B_

DALI-2

	CODE
	166565W_
	166565BQ_
	166565K_
	166565CH_
	166565B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	470 >90	3
3000K	500 >90	5

accessories on page 821

2.0

LED COB 13W | 48V
aluminium | PC adapter

IP20 0-90°|355° A 31° SDCM2 L70|55K 0.19kg

non dim


	CODE
	166662W_
	166662BQ_
	166662K_
	166662CH_
	166662B_

DALI-2

	CODE
	166665W_
	166665BQ_
	166665K_
	166665CH_
	166665B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x470 >90	3
3000K	2x500 >90	5


accessories on page 821



OPTIONAL

honeycomb louver

CODE
90051131







MATCH on STREX


48V system



reddot winner 2023



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0

LED COB 7W | 48V
aluminium | PC adapter

IP20 0-90°/360° 30° SDCM2 L80I50K 0.14kg

non dim

	CODE
	179152W_
	179152BL_
	179152CH_
	179152B_

DALI-2

	CODE
	179155W_
	179155BL_
	179155CH_
	179155B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	535 >90	3
3000K	560 >90	5

accessories on page 821



DENTAL PRACTICE M.K.A. | DMG ARCHITECTURAL SOLUTIONS KAPELLEN | BELGIUM

MICK on STREX

48V system

reddot winner 2020
lighting design

DESIGN AWARD 2021

1.0

LED COB10W | 48V
aluminium | PC adapter

IP20 0-90°|360° ∠ 23° SDCM2 L80|50K 0.22kg

non dim

CODE
159442J_
159442K_

DALI-2

CODE
159445J_
159445K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	425 >90	3
3000K	465 >90	5

accessories on page 821

2.0

LED COB19W | 48V
aluminium | PC adapter

IP20 0-90°|360° ∠ 23° SDCM2 L80|50K 0.44kg

non dim

CODE
159542J_
159542K_

DALI-2

CODE
159545J_
159545K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x425 >90	3
3000K	2x465 >90	5

accessories on page 821




PRIVATE RESIDENCE BELGIUM



BOX on STREX

48V system



1.0

LED COB 7W | 48V
aluminium

IP20 \angle 25° SDCM2 L80/55K 0.20kg

adapter | 2700K | CRI >90 | 440lm

	CODE
	258162W_3
	258162B_3
	DALI-2 258165W_3
	DALI-2 258165B_3


adapter | 3000K | CRI >90 | 470lm

	CODE
	258162W_5
	258162B_5
	DALI-2 258165W_5
	DALI-2 258165B_5

housing | inner reflector colour

	CODE
	W
	WM
	E
	M
	H
	Q
	BQ
	CH
	B

only for ceiling surface and suspended tracks

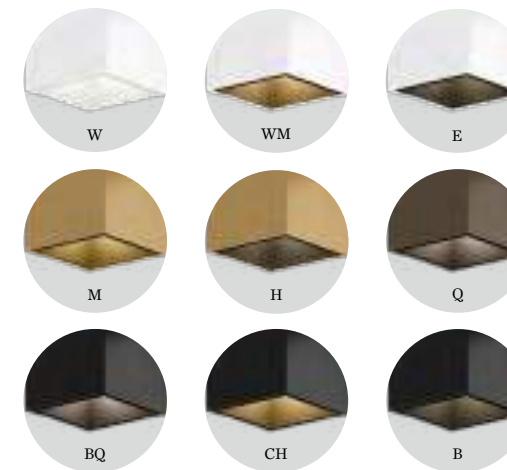

back



DOCUS on STREX

48V system

82 | 70 | 70 | 171

1.0

LED COB 7W | 48V
aluminium

IP20 \angle 25° SDCM2 L80I55K 0.18kg

adapter | 2700K | CRI >90 | 440lm

	CODE
	258362W_3
	258362B_3
	258365W_3
	258365B_3

adapter | 3000K | CRI >90 | 470lm

	CODE
	258362W_5
	258362B_5
	258365W_5
	258365B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	BQ
	K
	B

only for ceiling surface and suspended tracks

back

WEVER & DUCRÉ 312 – 313



HEXO on STREX

48V system

82 171 81

1.0

LED COB 7W | 48V
aluminium

IP20 \angle 25° SDCM2 L80I55K 0.18kg

adapter | 2700K | CRI >90 | 440lm

	CODE
	258462W_3
	258462B_3
	DALI-2 258465W_3
	DALI-2 258465B_3

adapter | 3000K | CRI >90 | 470lm

	CODE
	258462W_5
	258462B_5
	DALI-2 258465W_5
	DALI-2 258465B_5

housing | inner reflector colour

	CODE
	W
	J
	E
	Q
	BQ
	K
	B

only for ceiling surface and suspended tracks

[back](#)

WEVER & DUCRÉ 314 – 315



RAY on STREX

48V system

189

469

545

689

721

1.0

LED COB 7W | 48V
aluminium

IP20 Δ 25° SDCM2 L80I55K 0.16kg

adapter | 2700K | CRI >90 | 440lm

	CODE
	258262W_3
	258262B_3
DALI-2	258265W_3
DALI-2	258265B_3

adapter | 3000K | CRI >90 | 470lm

	CODE
	258262W_5
	258262B_5
DALI-2	258265W_5
DALI-2	258265B_5

housing | inner reflector colour

	CODE
	W
	WM
	E
	M
	H
	Q
	BQ
	CH
	B

only for ceiling surface and suspended tracks


back

WEVER & DUCRÉ 316 – 317



STREX MODULE

48V system



1.0 DOT

LED PCB 9W | 48V
PC adapter | cover
PC lens

IP20 $\Delta 24^\circ$ UGR=19 SDCM3 L80|60K 0.11kg


non dim

	CODE
	171342W_
	171342B_

DALI

	CODE
	171345W_
	171345B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	790 >90	3
3000K	880 >90	5



1.0 OPAL

LED PCB 12W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L80|60K 0.16kg


non dim

	CODE
	171382W_
	171382B_

DALI

	CODE
	171385W_
	171385B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	630 >90	5

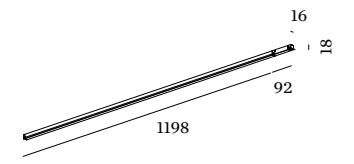

2.0 OPAL

LED PCB 24W | 48V
PC adapter | cover
PMMA opal cover

IP20 SDCM3 L80|60K 0.32kg

non dim

	CODE
	171482W_
	171482B_


DALI

	CODE
	171485W_
	171485B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1225 >90	3
3000K	1265 >90	5



dot



opal



back



RESTAURANT PASSADIS DEL PEP | SILVIA FERNÁNDEZ BARCELONA | SPAIN

MATCH on STREX

48V system



reddot winner 2023





DESIGN AWARD 2023



GOOD DESIGN

As awarded by The Chicago Athenaeum: Museum of Architecture and Design




3.0

LED COB 8W | 48V | DALI-2
aluminium | PC adapter

IP20 Δ 33° SDCM2 L80|50K 0.18kg

CODE	
	179265W_
	179265L_
	179265M_
	179265B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



5.0

LED COB 8W | 48V | DALI-2
aluminium | PC adapter

IP20 Δ 33° SDCM2 L80|50K 0.23kg


CODE	
	179365W_
	179365L_
	179365M_
	179365B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



OTHER LENGTHS ONLINE
weverducre.com/more-match-on-strex

white fixture with white cable/adaptor
other fixtures with black cable/adaptor
more colour combinations on request



back



57 | 113 | 145

223

407

515 | 623

659



ODREY on STREX

48V system



1.1

LED COB 7W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.28kg

CODE
187165WW_
187165GG_
187165BB_
187165WG_
187165BG_
187165GB_

white fixture with white cable/adapter
other fixtures with black cable/adapter
more colour combinations on request

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5

1.2

LED COB 7W | 48V | DALI-2
aluminium | shade matching
inner cover included | PC adapter

IP20 32° SDCM2 L70|55K 0.48kg

CODE
187265WW_
187265GG_
187265BB_
187265WG_
187265BG_
187265GB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	445 >90	5


1.3

LED COB 7W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.27kg

CODE
187365WW_
187365GG_
187365BB_
187365WG_
187365BG_
187365GB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	470 >90	5



1.4

LED COB 7W | 48V | DALI-2
aluminium | PC adapter


IP20 32° SDCM2 L70|55K 0.32kg



CODE
187465WW_
187465GG_
187465BB_
187465WG_
187465BG_
187465GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	450	>90	3
3000K	470	>90	5

white fixture with white cable/adaptor
other fixtures with black cable/adaptor
more colour combinations on request



1.6


LED COB 7W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.70kg

CODE
187665WW_
187665GG_
187665BB_
187665WG_
187665BG_
187665GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	505	>90	5

optional inner cover on page 816



1.7

LED COB 7W | 48V | DALI-2
aluminium | PC adapter

IP20 32° SDCM2 L70|55K 0.34kg

CODE
187765WW_
187765GG_
187765BB_
187765WG_
187765BG_
187765GB_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	480	>90	3
3000K	505	>90	5



optional inner cover on page 816





SOLLI on STREX

48V system



1.0

LED COB 5W | 48V | DALI-2
aluminium | black cable
artisanal Italian hand blown glass
PC adapter

IP20 SDCM2 L80|50K 0.55kg

	CODE
	238185FD_
	238185TD_
	238185WB_


other cable lengths on request

LIGHT COLOUR	LUMEN CRI	CODE
2700K	280 >90	3
3000K	290 >90	5

back





1-PHASE TRACKS

220-240V tracks / accessories

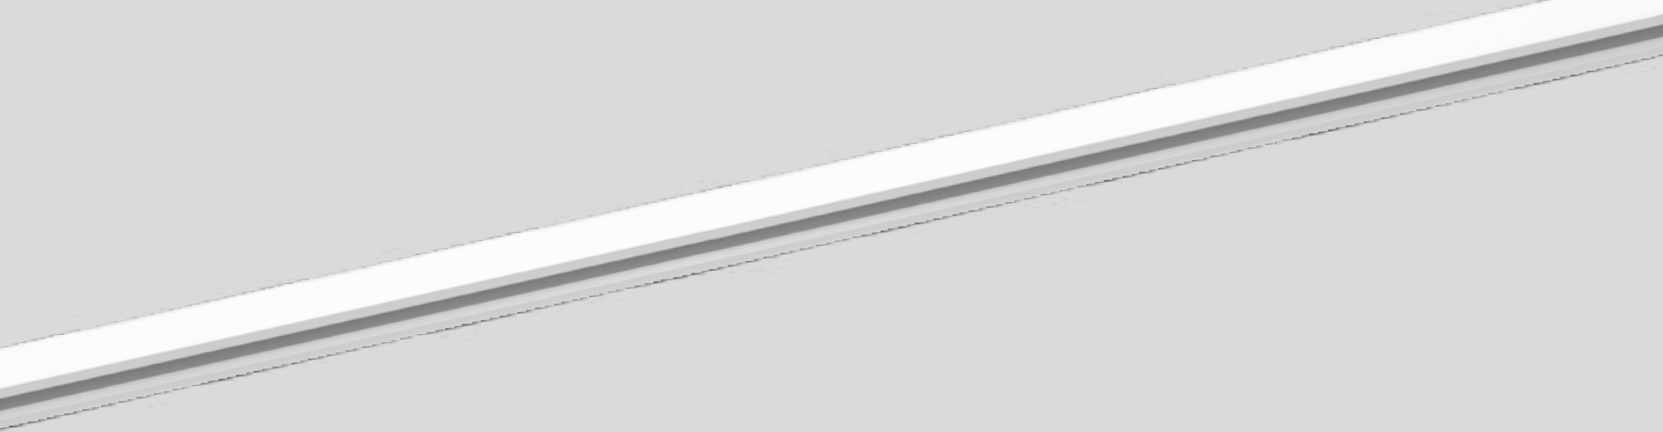

RECESSED | SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view
for more support and extended layout of 1-phase tracks,
please check our FAQ section on weverducre.com/faq

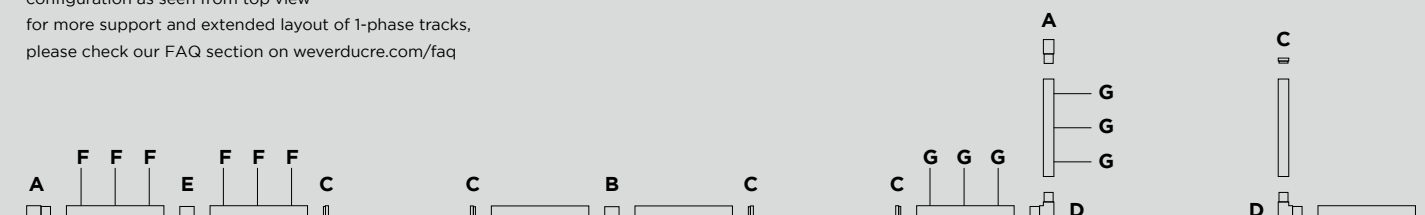

TRACK PROFILE

recessed | 220-240V | 16A



	CODE
1m	90014118
1m	90014119
2m	90014120
2m	90014121
3m	90014122
3m	90014123

F | MOUNTING BRACKET

for recessed fixation



	CODE
1m	90014100
1m	90014101
2m	90014102
2m	90014103
3m	90014104
3m	90014105

for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed

TRACK PROFILE

surface | suspended | 220-240V | 16A




	CODE
1m	90014001
1m	90014007
2m	90014002
2m	90014008
3m	90014003
3m	90014009

G | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
max. 1.5m	90014101
max. 1.5m	90014102
max. 3m	90014103
max. 3m	90014104


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014018
	90014019



A | END FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014020
	90014021



B | MIDDLE FEED

straight
220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014036
	90014037



C | END CAP LEFT/RIGHT

	CODE
	90014028
	90014029



D | L-FEED 1.0

220-240V | max. 3 x 1.5mm² - 16A

	CODE
	90014024
	90014025



D | L-FEED 2.0

220-240V | max. 3 x 1.5mm² - 16A


	CODE
	90014026
	90014027



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014022
	90014023




COVERPLATE END FEED

only use with recessed tracks

	CODE
	90014124
	90014125

more 1-phase track accessories on
page 822





ENSO BOUTIQUE HOTEL | TIM DE TAEYE & TINE VANPARIJS KNOCKE-HEIST | BELGIUM



SARA on track



1-Phase



241



621



1.0 LED

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°/355° 34° SDCM3 L70|55K 0.24kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0-90°/355° 0.16kg


	CODE
	157168W_
	157168G_
	157168K_
	157168B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	655 >80	3
3000K	700 >80	5

	CODE
	157120W0
	157120G0
	157120K0
	157120B0

OPTIONAL

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

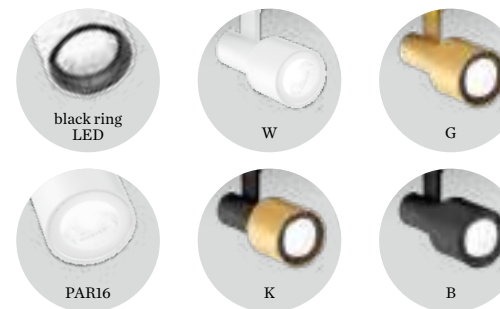

back







SQUBE on track

1-Phase



243



1.0 LED

LED LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

⊕ IP20 0-90°|355° ∠ 39° SDCM3 L70|55K 0.36kg

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter





⊕ IP20 0-90°|355° 0.32kg

	CODE
	144168W_
	144168B_

	CODE
	144120W0
	144120B0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	415 >90	3
3000K	430 >90	5
1800-3000K	350 >90	9

OPTIONAL


	CODE
 2700K 460lm	901228W3
 2700K 437lm	901228B3
 3000K 500lm	901228W5
 3000K 457lm	901228B5




black ring LED



PAR16



back



white fixtures with white adapter
other fixtures with black adapter

PIRRO on track


1-Phase



93



205




2.0 SPOT

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° A32° SDCM2 L70|55K 0.36kg

CODE	
	173264E_
	173264K_
	173264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5




4.0 SPOT

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector
1-phase Global® track adapter

IP20 310° A32° SDCM2 L70|55K 0.58kg

CODE	
	173464E_
	173464K_
	173464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5




2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° SDCM3 L80|60K 0.33kg

CODE	
	173284E_
	173284K_
	173284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	270 >90	3
3000K	290 >90	5




4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PMMA cover
1-phase Global® track adapter

IP20 310° SDCM3 L80|60K 0.54kg

CODE	
	173484E_
	173484K_
	173484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5





DRO on track

1-Phase



263




413



557



647 | 661



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
1-phase Global® track adapter

⊕ IP20 0.60kg

CODE

1724G0WB0

OPTIONAL


QT14 3W | G9 | phase-cut dim | clear
CODE

2700K 300lm	9010G802
3000K 280lm	9010G804



RAY | HEXO on track

1-Phase



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter

IP20 0.58 | 0.74kg


2.0 200mm	CODE
	215520G0
	215520Q0
	215520P0
	215520B0

3.0 300mm	CODE
	215620G0
	215620Q0
	215620P0
	215620B0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

white fixture with white cable/adaptor
other fixtures with black cable/adaptor
more colour combinations on request



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
1-phase Global® track adapter



IP20 0.54 | 0.68kg

2.0 200mm	CODE
	217520W0
	217520G0
	217520M0
	217520P0
	217520B0

3.0 300mm	CODE
	217620W0
	217620G0
	217620M0
	217620P0
	217620B0


OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



ODREY on track

1-Phase




1.1
 PAR16 max. 12W | GU10
 100-240VAC | 50-60Hz
 aluminium
 incl. 1-phase Global® track adapter

IP20 0.29kg

CODE	
187120WW0	
187120GG0	
187120BB0	
187120WG0	
187120BG0	
187120GB0	

OPTIONAL
 PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5




1.2
 PAR16 max. 12W | GU10
 100-240VAC | 50-60Hz
 aluminium | shade matching
 inner cover included
 incl. 1-phase Global® track adapter

IP20 0.49kg

CODE	
187220WW0	
187220GG0	
187220BB0	
187220WG0	
187220BG0	
187220GB0	

OPTIONAL
 PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



1.3
 PAR16 max. 12W | GU10
 100-240VAC | 50-60Hz
 aluminium
 incl. 1-phase Global® track adapter

IP20 0.28kg

CODE	
187320WW0	
187320GG0	
187320BB0	
187320WG0	
187320BG0	
187320GB0	


OPTIONAL
 PAR16 6.5W | GU10 | phase-cut dim

CODE	
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



white fixture with white cable/adaptor
 other fixtures with black cable/adaptor
 more colour combinations on request

back



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter

⊕ IP20 0.33kg

CODE	
	187420WW0
	187420GG0
	187420BB0
	187420WG0
	187420BG0
	187420GB0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



white fixture with white cable/adapter
other fixtures with black cable/adapter
more colour combinations on request



1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter

⊕ IP20 0.36kg


CODE	
	187620WW0
	187620GG0
	187620BB0
	187620WG0
	187620BG0
	187620GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. 1-phase Global® track adapter

⊕ IP20 0.32kg

CODE	
	187720WW0
	187720GG0
	187720BB0
	187720WG0
	187720BG0
	187720GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



3-PHASE TRACKS

220-240V tracks | accessories



SURFACE | SUSPENDED EXAMPLES

configuration as seen from top view

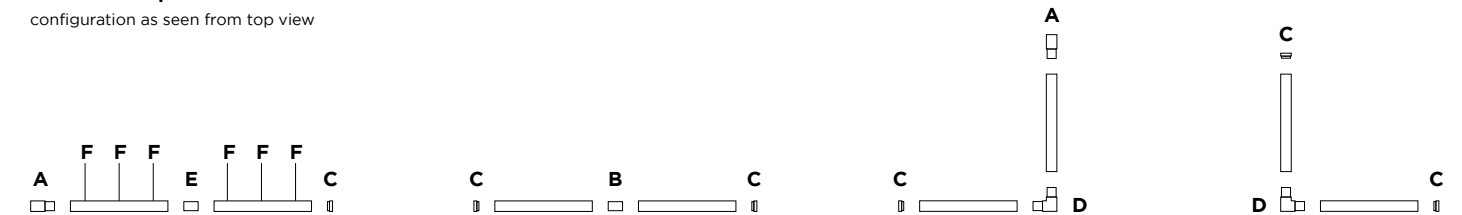


TRACK PROFILE

surface | suspended | DALI
220-240V | 16A

⊕ DALI FELV

	CODE
1m	90014200
1m	90014201
2m	90014202
2m	90014203
3m	90014204
3m	90014205




F | SUSPENSION SET

complete suspension set
incl. ceiling fixation bracket

	CODE
max. 1.5m	90014206
max. 1.5m	90014207
max. 3m	90014208
max. 3m	90014209


for 1.0m - 2pcs needed
for 2.0m - 3pcs needed
for 3.0m - 4pcs needed



A | END FEED 1.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014240
	90014241



A | END FEED 2.0

including cable gasket
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014238
	90014239



B | MIDDLE FEED


straight
220-240V | max. 7 x 1.5-2.5mm² | 16A

	CODE
	90014224
	90014225



C | END CAP LEFT/RIGHT


	CODE
	90014216
	90014217



D | L-FEED 1.0

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014220
	90014221



D | L-FEED 2.0

220-240V | max. 7 x 1.5-2.5mm² | 16A


	CODE
	90014222
	90014223



E | STRAIGHT CONNECTOR

straight | 220-240V | 16A

	CODE
	90014226
	90014227



TRACK COVER

	CODE
1m	90014236
1m	90014237

more 3-phase track accessories on
page 823



SQUBE on track

3-Phase

1.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0-90°|355° 0.32kg

CODE	
	144720W0
	144720B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

2.0 LED

LED LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0-90°|355° ∠32° SDCM3 L70|55K 0.40kg

CODE	
	144368W_
	144368B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	940 >90	3
3000K	970 >90	5
1800K-3000K	640 >90	9

3.0 LED

LED LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0-90°|355° ∠27° SDCM3 L70|55K 0.75kg

CODE	
	144558W_
	144558B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1520 >90	3
3000K	1565 >90	5

black ring LED

PAR16

back



CENO fort on track

3-Phase





119



227



513

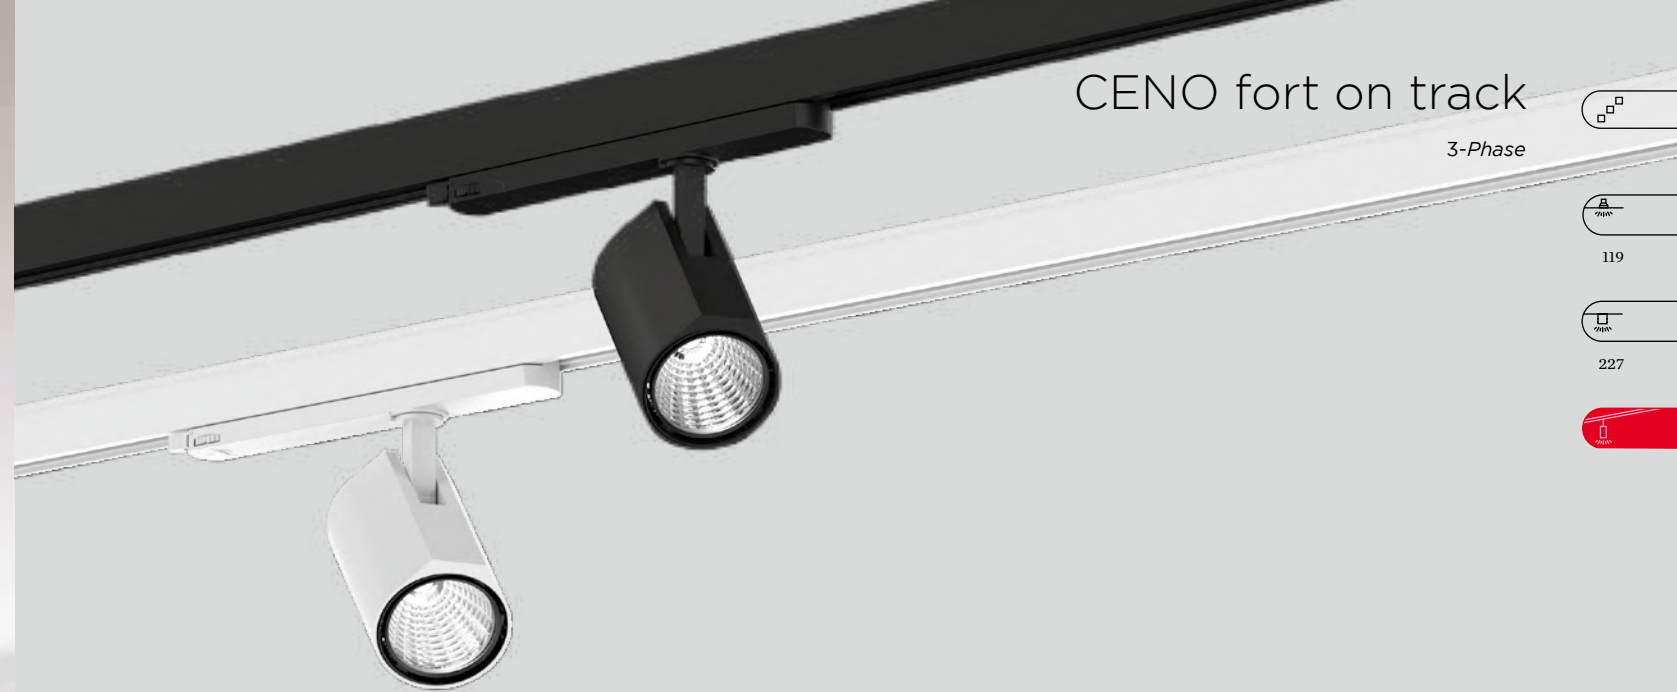

1.0

LED LED COB 36W
 220-240VAC | 50-60Hz
 3-phase track adapter | incl. driver
 aluminium

IP IP20 0-90°/360° **A** 24° SDCM2 L80/50K 0.63kg


non-dim


CODE

 166963W_
 166963B_

DALI-2

CODE

 166965W_
 166965B_




OPTIONAL

honeycomb louver



CODE
 90051132


LIGHT COLOUR	LUMEN CRI	CODE
3000K	2670 >90	5
4000K	2960 >90	7

 back



RAY | HEXO on track

3-Phase



HEXO 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0.58 | 0.74kg

2.0

200mm

	CODE
	215320G0
	215320Q0
	215320P0
	215320B0

3.0

300mm

	CODE
	215420G0
	215420Q0
	215420P0
	215420B0


OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



white fixture with white cable/adapter
other fixtures with black cable/adapter
more colour combinations on request



RAY 2.0 | 3.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
3-phase track adapter

⊕ IP20 0.54 | 0.68kg

2.0

200mm

	CODE
	217320W0
	217320G0
	217320M0
	217320P0
	217320B0

3.0


300mm

	CODE
	217420W0
	217420G0
	217420M0
	217420P0
	217420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



181 | 189

469 | 471

545

689

721



ROOMOR OFFICE on track


3-Phase



reddot winner 2021



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 MICROPRISMATIC

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium
microprismatic PMMA cover
3-phase track adapter incl. driver



IP20 SDCM3 L80|60K UGR ≤ 19 4.43kg

3000K | CRI >90 | 3660lm

	CODE
	1684M5W5
	1684M5B5

4000K | CRI >90 | 3660lm

	CODE
	1684M5W7
	1684M5B7



1.0 OPAL

LED PCB 35W | DALI-2
220-240VAC | 50-60Hz
aluminium | opal PMMA cover
3-phase track adapter incl. driver

IP20 SDCM3 L80|60K 4.43kg

3000K | CRI >90 | 3700lm

	CODE
	168485W5
	168485B5


4000K | CRI >90 | 3700lm

	CODE
	168485W7
	168485B7




PIRRO SYSTEM

Ceiling surface




CHOOSE YOUR BASE

1.0 ceiling base
ceiling base for 2 insets
aluminium




	CODE
	90052072
	90052074
	90052073

2.0 ceiling base
ceiling base for 3 insets
aluminium



	CODE
	90052075
	90052077
	90052076




2.0 SPOT

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 Δ 32° SDCM2 L70I55K 0.30kg

	CODE
	151264E_
	151264J_
	151264K_
	151264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x360 >90	3
3000K	2x380 >90	5




4.0 SPOT

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC lens and reflector

IP20 Δ 32° SDCM2 L70I55K 0.48kg

	CODE
	151464E_
	151464J_
	151464K_
	151464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x360 >90	3
3000K	4x380 >90	5




2.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 SDCM3 L80I60K 0.30kg

	CODE
	151284E_
	151284J_
	151284K_
	151284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240 >90	3
3000K	260 >90	5




4.0 OPAL

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 SDCM3 L80I60K 0.52kg

	CODE
	151484E_
	151484J_
	151484K_
	151484B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >90	3
3000K	740 >90	5



A | 1.0
 LED PCB | dimmable
 220-240VAC | 50-60Hz
 aluminium | opal PMMA cover


IP20 SDCM3 L80|50K 1.70kg

phase-cut dim | 20W
 3000K | CRI >90 | 1090lm

	CODE
	500384W5
	500384B5

DALI-2 | 22W | incl. driver
 3000K | CRI >90 | 1090lm

	CODE
	500385W5
	500385B5



B | CONNECTOR POINT
 phase-cut dim up to max. 4 fixtures
 DALI up to max. 2 fixtures

	CODE
	900190W1
	900190B1

C | STEEL SUSPENSION CABLE

	CODE
2.0m	90015102

D1 | POWER FEEDER
 for phase-cut dim | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder


	CODE
	90018010
	90018011

D2 | POWER FEEDER
 for DALI | incl. steel suspension cable 2.0m | max. 10 luminaires per power feeder

	CODE
	90018012
	90018013



SURFACE EXAMPLES

configuration as seen from top view | minimum angle 45°

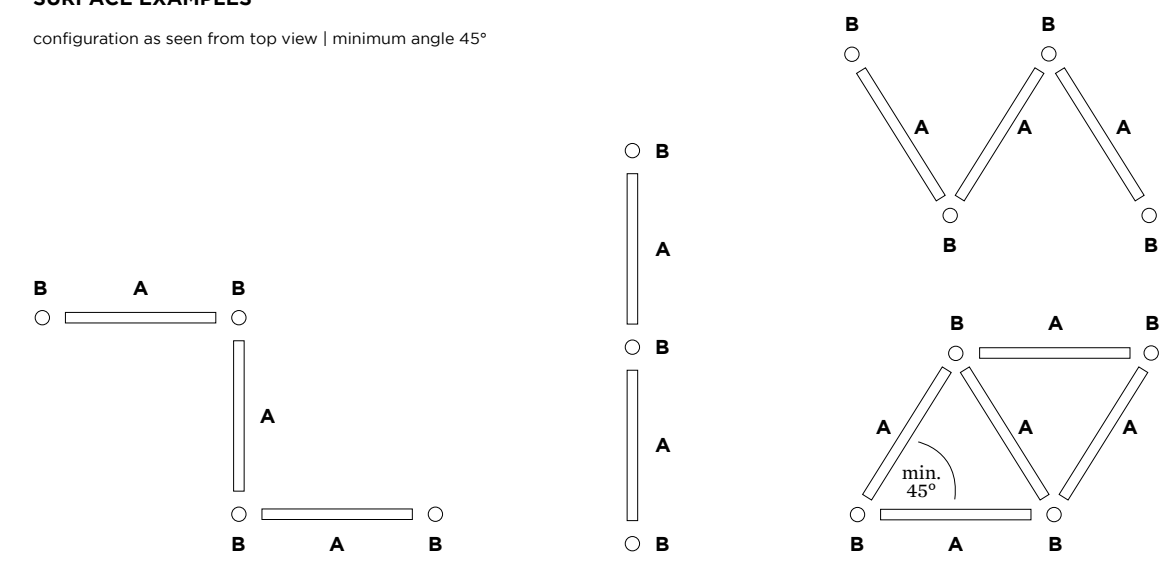

SUSPENDED EXAMPLES

configuration as seen from top view | minimum angle 45°
 can be used up or down (direct or indirect)

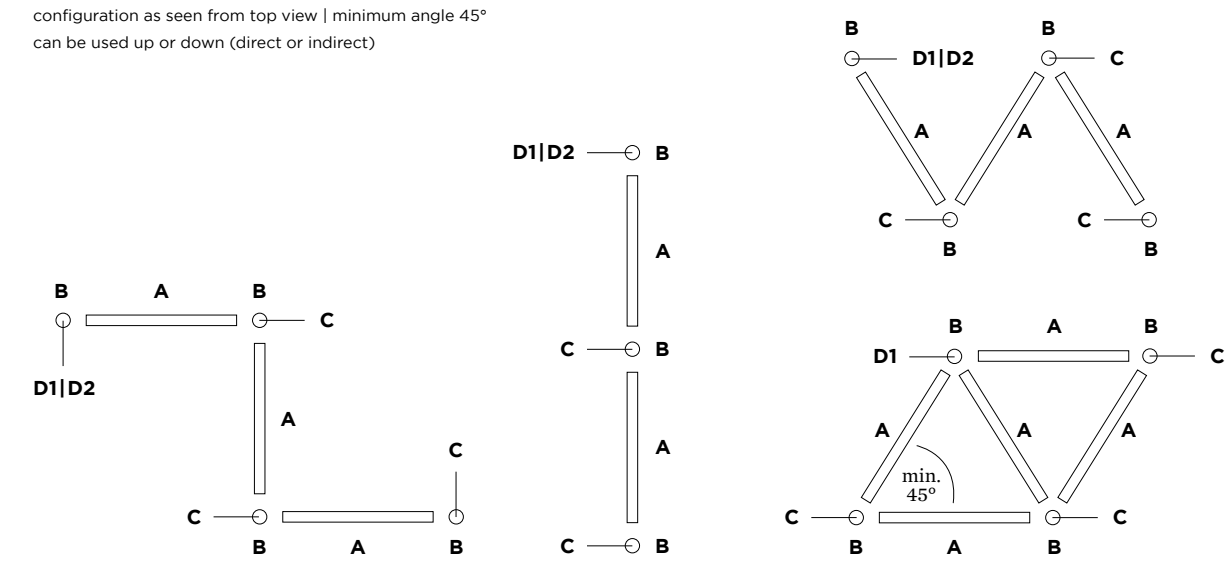




OFFICE BELGIUM



1.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips

0.11kg/m




CODE

2m	911991W2
2m	911991B2
3m	911991W3
3m	911991B3

2.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips

0.19kg/m

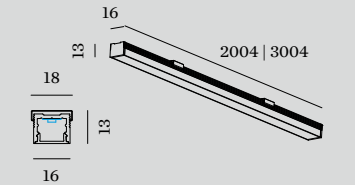

CODE

2m	911992W2
2m	911992B2
3m	911992W3
3m	911992B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE

20W 2m	9003S21
30W 3m	9003S31
50W 5m	9003S41

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE

30W 2m	9003S22
45W 3m	9003S32
75W 5m	9003S42

LIGHT COLOUR

CRI CODE

2700K	>90	3
3000K	>90	5

driver | 24V

CODE

35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 810

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE

20W 2m	9003S21
30W 3m	9003S31
50W 5m	9003S41

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE

30W 2m	9003S22
45W 3m	9003S32
75W 5m	9003S42

LIGHT COLOUR

CRI CODE



2700K	>90	3
3000K	>90	5

driver | 24V

CODE

35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 810



OPTIONAL

Black diffuser | only for 1.0

CODE

2m	911902B1
3m	911903B1

Double side tape for profile fixation

CODE

3m	90019199
----	----------

more accessories on page 820


for net output of LED strip on profiles,
check weverducre.com/ilane

ILANE

Ceiling surface / recessed

3.0 PROFILE


aluminium | opal diffuser included
end caps and mounting clips



CODE	
2m	911993W2
2m	911993B2
3m	911993W3
3m	911993B3

4.0 PROFILE

aluminium | opal diffuser included
end caps and mounting clips

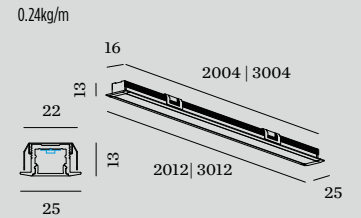

CODE	
2m	911994W2
2m	911994B2
3m	911994W3
3m	911994B3

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21
30W 3m	9003S31
50W 5m	9003S41

LED COB strip 24V | IP20
15W/m | 1250lm/m

CODE	
30W 2m	9003S22
45W 3m	9003S32
75W 5m	9003S42

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 810

ALWAYS USE

LED COB strip 24V | IP20
10W/m | 800lm/m

CODE	
20W 2m	9003S21
30W 3m	9003S31
50W 5m	9003S41

LED COB strip 24V | IP20
15W/m | 1250lm/m



CODE	
30W 2m	9003S22
45W 3m	9003S32
75W 5m	9003S42

LIGHT COLOUR	CRI	CODE
2700K	>90	3
3000K	>90	5

driver | 24V

CODE	
35W	90212801
100W	90212902
25W dim	90222701
50W dim	90222901

specs on page 810



OPTIONAL

Black diffuser | only for 3.0

CODE	
2m	911912B1
3m	911913B1

Double side tape for profile fixation

CODE	
3m	90019199

more accessories on page 820

for net output of LED strip on profiles,
check weverducre.com/ilane

SINGLE LUMINAIRES




new
TRACE CHANDELIER
373

NET
377

new
FINELLE
381

FIL
383

FINLIN
385

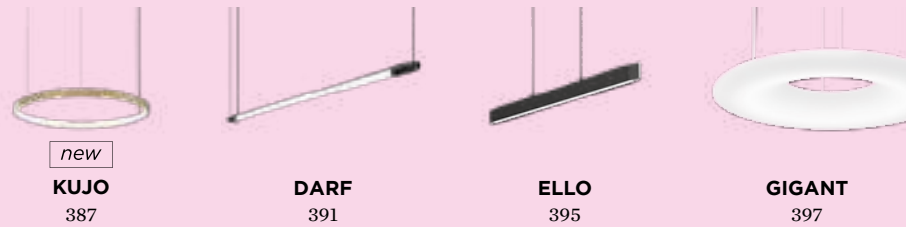

new
KUJO
387

DARF
391

ELLO
395

GIGANT
397

SINGLE SUSPENSIONS



TRACE 1.1
399

TRACE 2.0
401

CONE
403

CORK
405

MATCH
407



SOLLI
409

SOLLI COCOON 1.0
411

SOLLI COCOON 2.0
411

DRO
413

WIRO
417

MIRRO
431



MIRRO SOFT
433

J.J.W.
437

ROOMOR
445

ROOMOR OFFICE
451

BISHOP
455

ODREY
461

MULTIBASE USE

more infos on p. 459



RAY
469

HEXO
471

WETRO
475

new
CLEA
483

SHIEK 2.0
487


SHIEK 3.0
489

SHIEK 4.0
491

DINOR 1.0
493

DINOR 2.0
493

DINOR 3.0
493

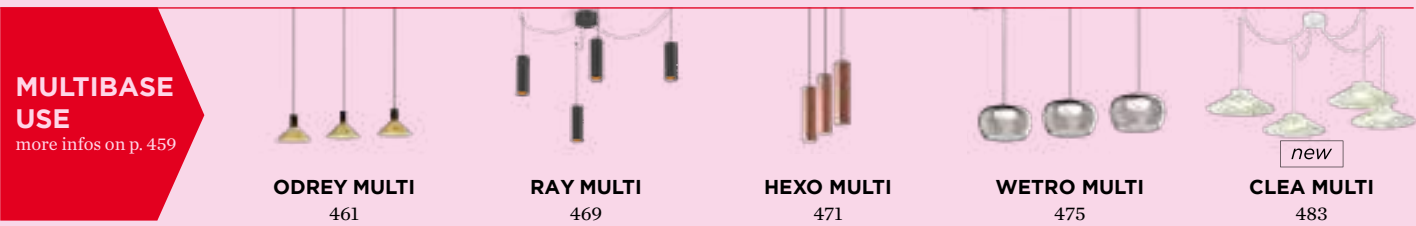

ODREY MULTI
461

RAY MULTI
469

HEXO MULTI
471

WETRO MULTI
475

new
CLEA MULTI
483



SHIEK MULTI
487



TRACE CHANDELIER


Ceiling suspended

new



reddot winner 2023

201 | 253 | 257




1.0

LED COB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 30° SDCM2 L80|50K 0.64kg

CODE	
	253564CH_
	253564B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x180 >90	3
3000K	4x200 >90	5




2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 30° SDCM2 L80|50K 0.84kg

CODE	
	253664CH_
	253664B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	6x180 >90	3
3000K	6x200 >90	5

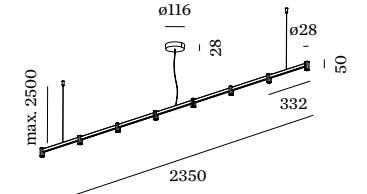

3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 30° SDCM2 L80|50K 1.10kg

CODE	
	253764CH_
	253764B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	8x180 >90	3
3000K	8x200 >90	5



back





NET

Ceiling suspended

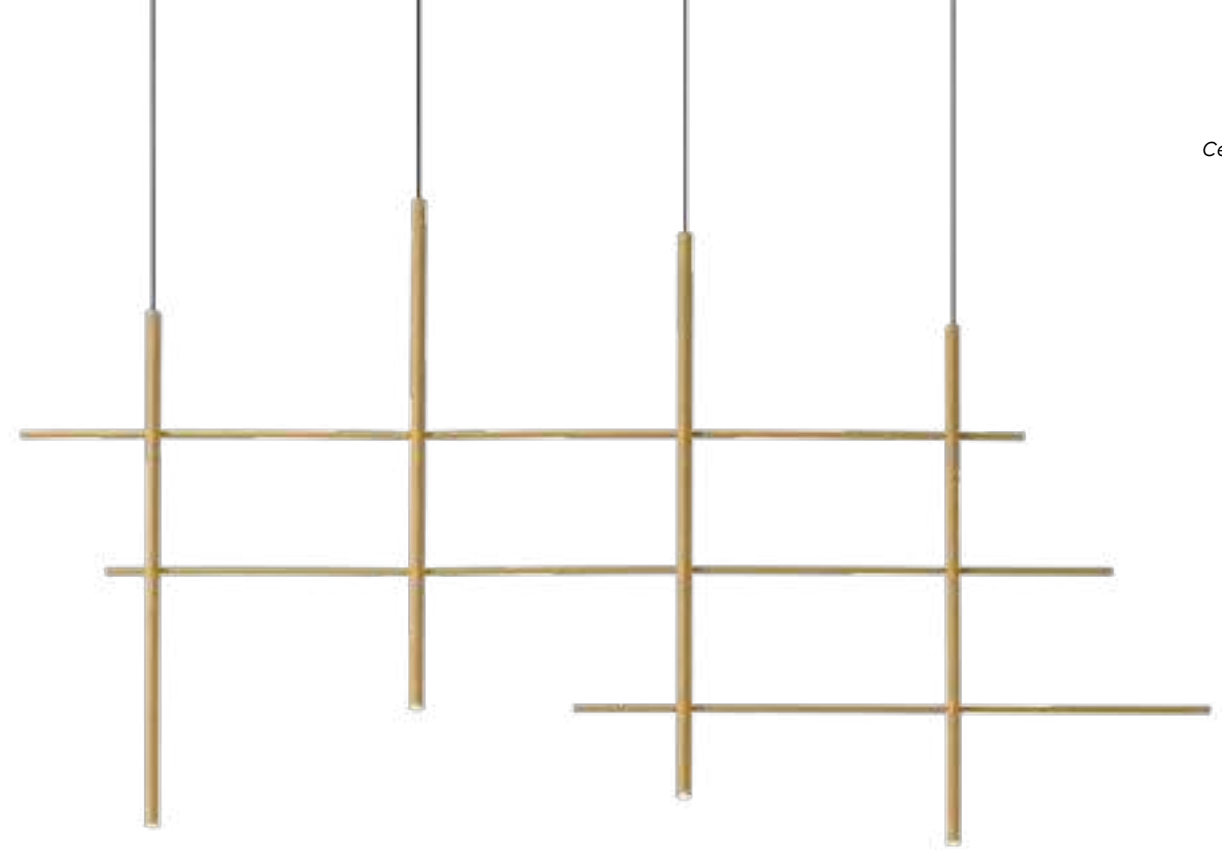


2.0

LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 85° SDCM3 L80|50K 1.41kg

2700K | CRI >90 | 2x250lm

	CODE
	231264W3
	231264M3
	231264B3




4.0

LED PCB 28W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 85° SDCM3 L80|50K 2.55kg

2700K | CRI >90 | 4x250lm

	CODE
	231464W3
	231464M3
	231464B3






FINELLE

Ceiling suspended

new



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | ribbed glass

IP20 SDCM3 L80/100K 1.95kg

2700K | CRI >90 | 950lm


	CODE
	272184M3
	272184B3

back




FIL



Ceiling suspended



251




615

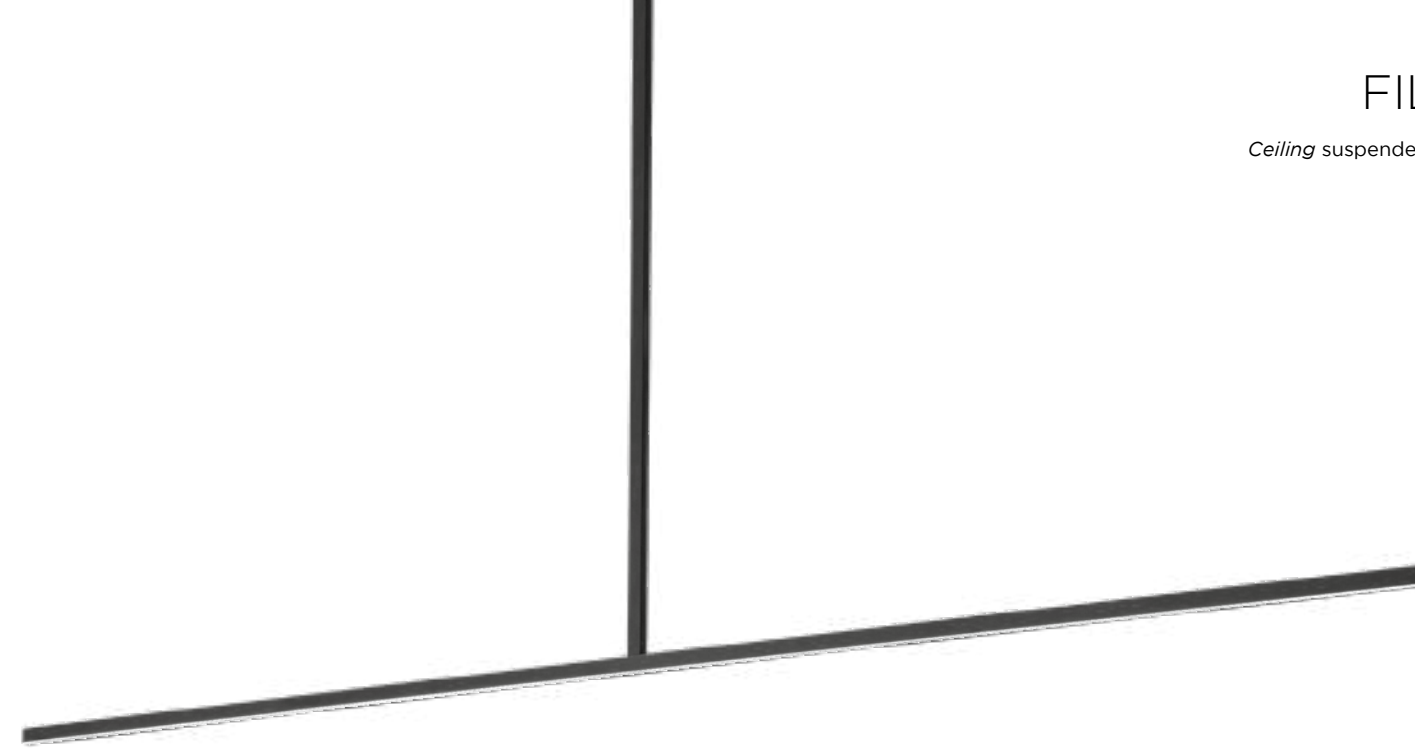

1.0

LED PCB 22W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium



⊕ IP20 SDCM3 L80|50K 1.39kg



2.0

LED PCB 27W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 SDCM3 L80|50K 1.47kg



CODE

2543M4B_

CODE

2544M4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1090 >90	3
3000K	1200 >90	5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1310 >90	3
3000K	1440 >90	5

back



FINLIN

Ceiling suspended



reddot winner 2023




277



609



657



1.0

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.31kg

		CODE	
	2.5m	270184CH_	
	2.5m	270184B_	
	10m	270484B5	

OPTIONAL

cover plate adapter for concrete housing

		CODE	
		900194B0	




2.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.34kg

		CODE	
	2.5m	270284CH_	
	2.5m	270284B_	
	10m	270584B5	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	430 >90	3
3000K	440 >90	5




3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.38kg

		CODE	
	2.5m	270384CH_	
	2.5m	270384B_	
	10m	270684B5	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	870 >90	3
3000K	890 >90	5






back



KUJO

Ceiling suspended

new



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80/100K 0.59kg

2700K | CRI >90 | 1100lm

	CODE
	271182W3
	271182M3
	271182Q3
	271182B3

white fixtures with white cable/base
and connector | other fixtures with black
cable/base and connector

2.0

LED PCB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80/100K 0.86kg

2700K | CRI >90 | 1500lm

	CODE
	271282W3
	271282M3
	271282Q3
	271282B3

3.0

LED PCB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80/100K 1.05kg

2700K | CRI >90 | 2000lm

	CODE
	271382W3
	271382M3
	271382Q3
	271382B3


back



KUJO

Ceiling suspended

new




2.1

LED PCB 26W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80|100K 1.18kg

2700K | CRI >90 | 2600lm

	CODE
	271482W3
	271482M3
	271482Q3
	271482B3




3.1

LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80|100K 1.21kg

2700K | CRI >90 | 3100lm

	CODE
	271582W3
	271582M3
	271582Q3
	271582B3




3.2

LED PCB 35W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80|100K 1.58kg

2700K | CRI >90 | 3500lm

	CODE
	271682W3
	271682M3
	271682Q3
	271682B3



3.2.1


LED PCB 46W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | silicone cover

IP20 SDCM3 L80|100K 1.84kg

2700K | CRI >90 | 4600lm


	CODE
	271782W3
	271782M3
	271782Q3
	271782B3

white fixtures with white cable/base and connector | other fixtures with black cable/base and connector






BENEDICTION | KKOL STUDIO SEOUL | SOUTH KOREA

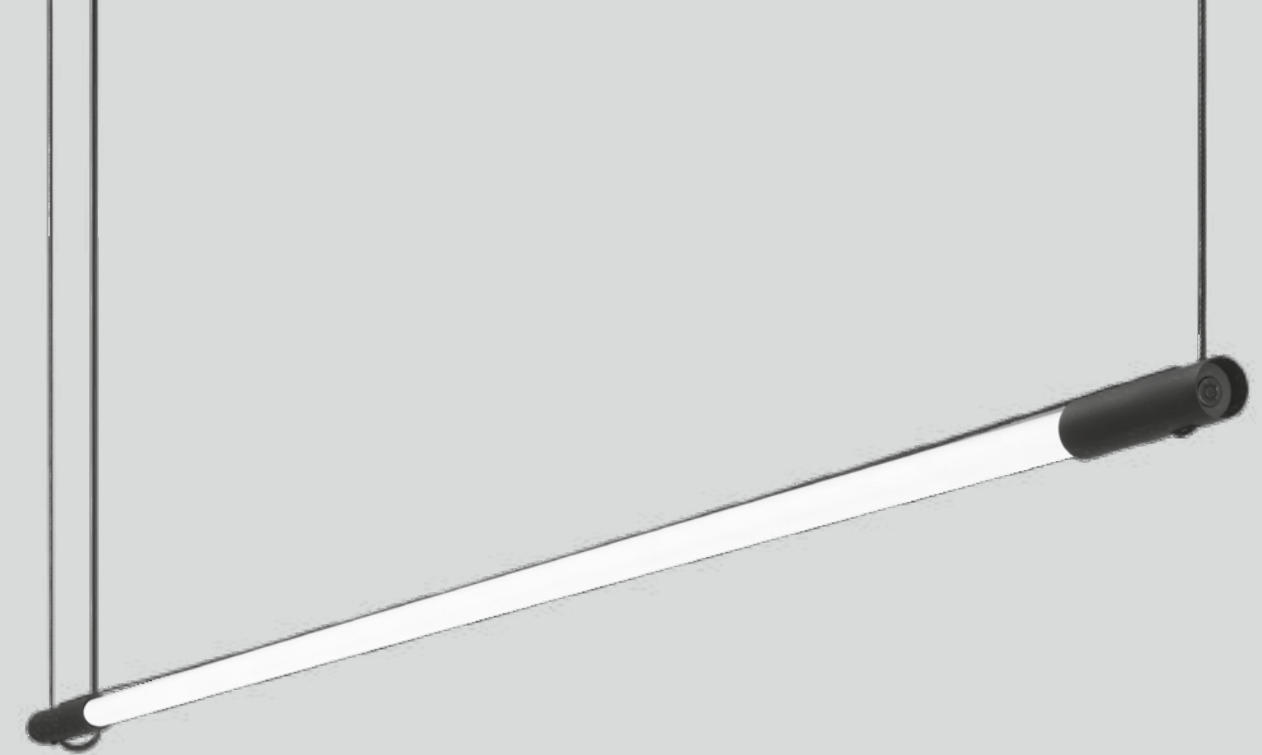

DARF

Ceiling suspended

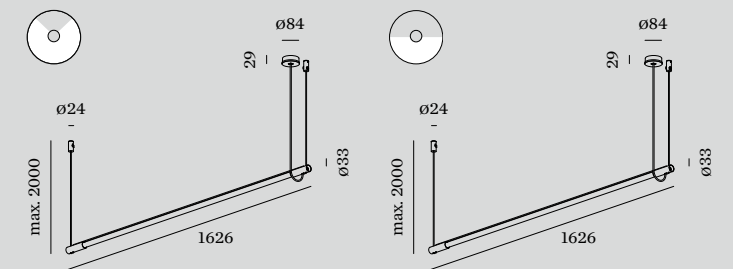

1.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 SDCM3 L70|60K 0.42kg

3000K | CRI >80 | 3300lm

CODE

2561T7B4

4000K | >80 CRI | 3700lm

CODE

2561T7B6

1.2

LED TUBE 24W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | black textile cable

IP20 SDCM3 L70|50K 0.42kg

2700K | CRI >90 | 2500lm

CODE

2561T8B3

3000K | >90 CRI | 2650lm

CODE

2561T8B5



► DESIGN WITH LOVE




ELLO



Ceiling suspended



reddot award 2015
winner



362

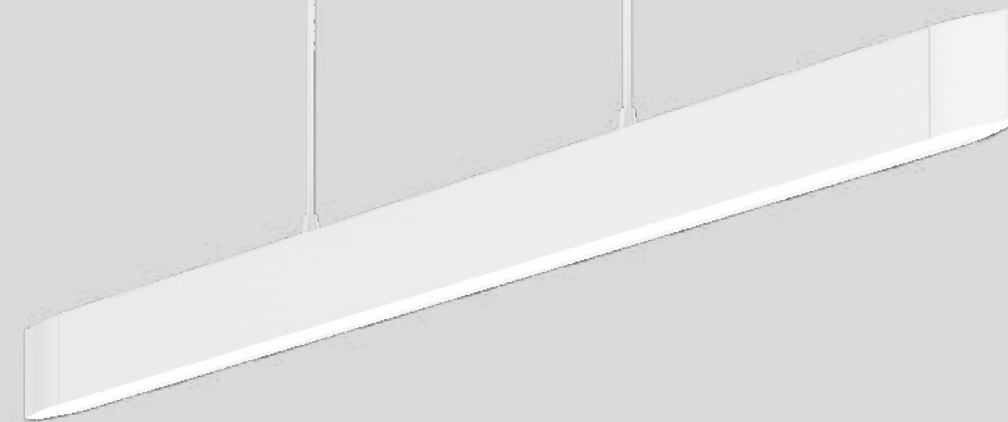

13.0

LED PCB 20W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover



IP20 SDCM3 L80|50K 2.00kg

3000K | CRI >90 | 1090lm

CODE

500484W5


500484B5





GIGANT

Ceiling suspended



10.0

LED PCB 42W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 SDCM2 L80/60K 8.80kg

3000K | CRI >80 | 5300lm


CODE
213385W4

4000K | CRI >80 | 5600lm

CODE
213385W6

OPTIONAL

CODE
suspension
set 4m 90015114
longer suspension on request



16.0

LED PCB 84W | DALI-2 | switch dim
220-240VAC | 50-60Hz | incl. driver
steel | opal LLDPE body | UL 94
HB std.glow wire test 630°

IP20 SDCM2 L80/60K 15.30kg

3000K | CRI >80 | 10600lm

CODE
213485W4

4000K | CRI >80 | 11300lm

CODE
213485W6

OPTIONAL

CODE
suspension
set 4m 90015114
longer suspension on request




TRACE

Ceiling suspended




reddot winner 2023



201 | 253 | 257



517



1.1


LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 33° SDCM2 L80|50K 0.33kg

	CODE
	253164W_
	253164BL_
	253164CH_
	253164B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5

white fixtures with white cable/base
other fixtures with black cable/base
more colour combinations on request




1.2

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


IP20 Δ 33° SDCM2 L80|50K 0.42kg

	CODE
	253264W_
	253264BL_
	253264CH_
	253264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5



back



2.0 LED


LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 Δ 75° SDCM2 L80|50K 0.65kg

	CODE
	253474W_
	253474BL
	253474CH
	253474B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	530 >90	3
3000K	570 >90	5

white fixtures with white cable/base
other fixtures with black cable/base
more colour combinations on request



2.0 E27

G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP20 0.59kg

	CODE
	2533E0WO
	2533E0BLO
	2533E0CHO
	2533E0BO

OPTIONAL

G95 5.6W | E27 | phase-cut dim | clear
CODE
2700K | 483lm 9003E160

G95 5.4W | E27 | phase-cut dim
filament | gold tinted
CODE
2200K | 380lm 9003E111

TRACE


Ceiling suspended




reddot winner 2023

201 | 253 | 257


517



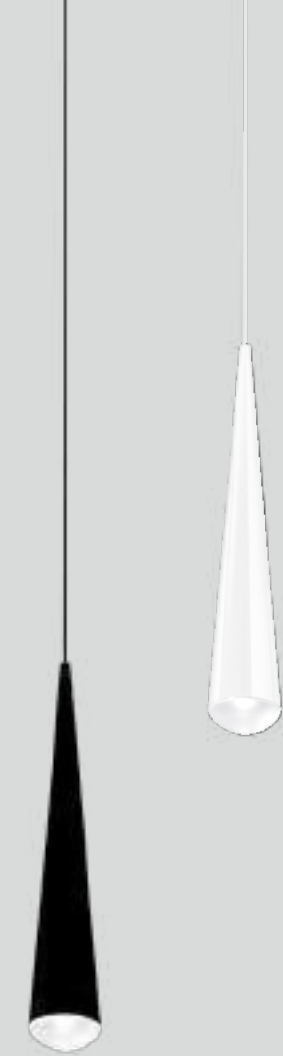

CONE

Ceiling suspended






1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | chrome plated | glass

IP20 Δ 38° SDCM3 L80/60K 0.55kg

2700K | CRI >90 | 405lm

	CODE
	200184W3
	200184B3






► DESIGN WITH LOVE

MAGAZIN AUF EF OER ERKENSCHWICK | GERMANY



CORK

Ceiling suspended



1.0

LED PCB 4W
100-240VAC | 50-60Hz | incl. driver
aluminium
fits bottles inner ø16.5 - 19.5 mm

IP20 | 36° SDCM3 L80I60K 0.24kg

2700K | CRI >80 | 145lm

CODE


210363B2

OPTIONAL

CODE

bottle 1
75/174 | glass 90019013

bottle 2
87/323 | glass 90019014




WEVER & DUCRÉ 404 – 405



MARBELLA DESIGN & ART FAIR | MV INTERIORISMO MARBELLA | SPAIN



white fixtures with white cable/base
 other fixtures with black cable/base
 more colour combinations on request




3.0

LED COB 9W | phase-cut dim
 220-240VAC | 50-60Hz | incl. driver
 aluminium

IP20 \angle 33° SDCM2 L80|50K 0.26kg

CODE	
	279264W_
	279264L_
	279264M_
	279264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5



5.0

LED COB 9W | phase-cut dim
 220-240VAC | 50-60Hz | incl. driver
 aluminium

IP20 \angle 33° SDCM2 L80|50K 0.36kg

CODE	
	279364W_
	279364L_
	279364M_
	279364B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	490 >90	3
3000K	520 >90	5

MATCH

Ceiling suspended



As awarded by The Chicago Athenaeum:
 Museum of Architecture and Design






SPICY LEMON | STAY STUDIO KORTRIJK | BELGIUM

SOLLI

Ceiling suspended



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.48kg

	CODE
	238284FD_
	238284TD_
	238284WB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >90	3
3000K	370 >90	5


back





SOLLI COCOON


Ceiling suspended



1.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.70kg



2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material
artisanal hand blown glass

IP20 SDCM2 L80|50K 0.63kg

OPTIONAL

3.0 full acoustic element
aluminium | PET felt material

CODE	238500MF0	238500LF0	238500OF0

more specs on page 824

CODE	238384MF_	238384LF_	238384OF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	290 >90	3
3000K	310 >90	5

CODE	238484MF_	238484LF_	238484OF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	290 >90	3
3000K	310 >90	5






BAKERY WITTAMER BRUSSELS | BELGIUM



DRO

Ceiling suspended




263




341



557



647 | 661




1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

⊕ IP20 0.50kg

CODE

2521G0WB0




2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

⊕ IP20 1.07kg

CODE

2522C0WB0




3.0

A60 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

⊕ IP20 2.20kg

CODE

2523E0WB0



4.0

A65 max. 12W | E27
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass

⊕ IP20 3.25kg

CODE

2524E0WB0

OPTIONAL

QT14 3W | G9 | phase-cut dim | clear
CODE
2700K | 300lm 9010G802
3000K | 280lm 9010G804

OPTIONAL


C35 5.5W | E14 | phase-cut dim | opal
CODE
2700K | 450lm 9003C103


OPTIONAL

A60 9W | E27 | phase-cut dim | opal
CODE
2700K | 800lm 9003E152

OPTIONAL

A65 14.6W | E27 | phase-cut dim | opal
CODE
2700K | 1378lm 9003E153



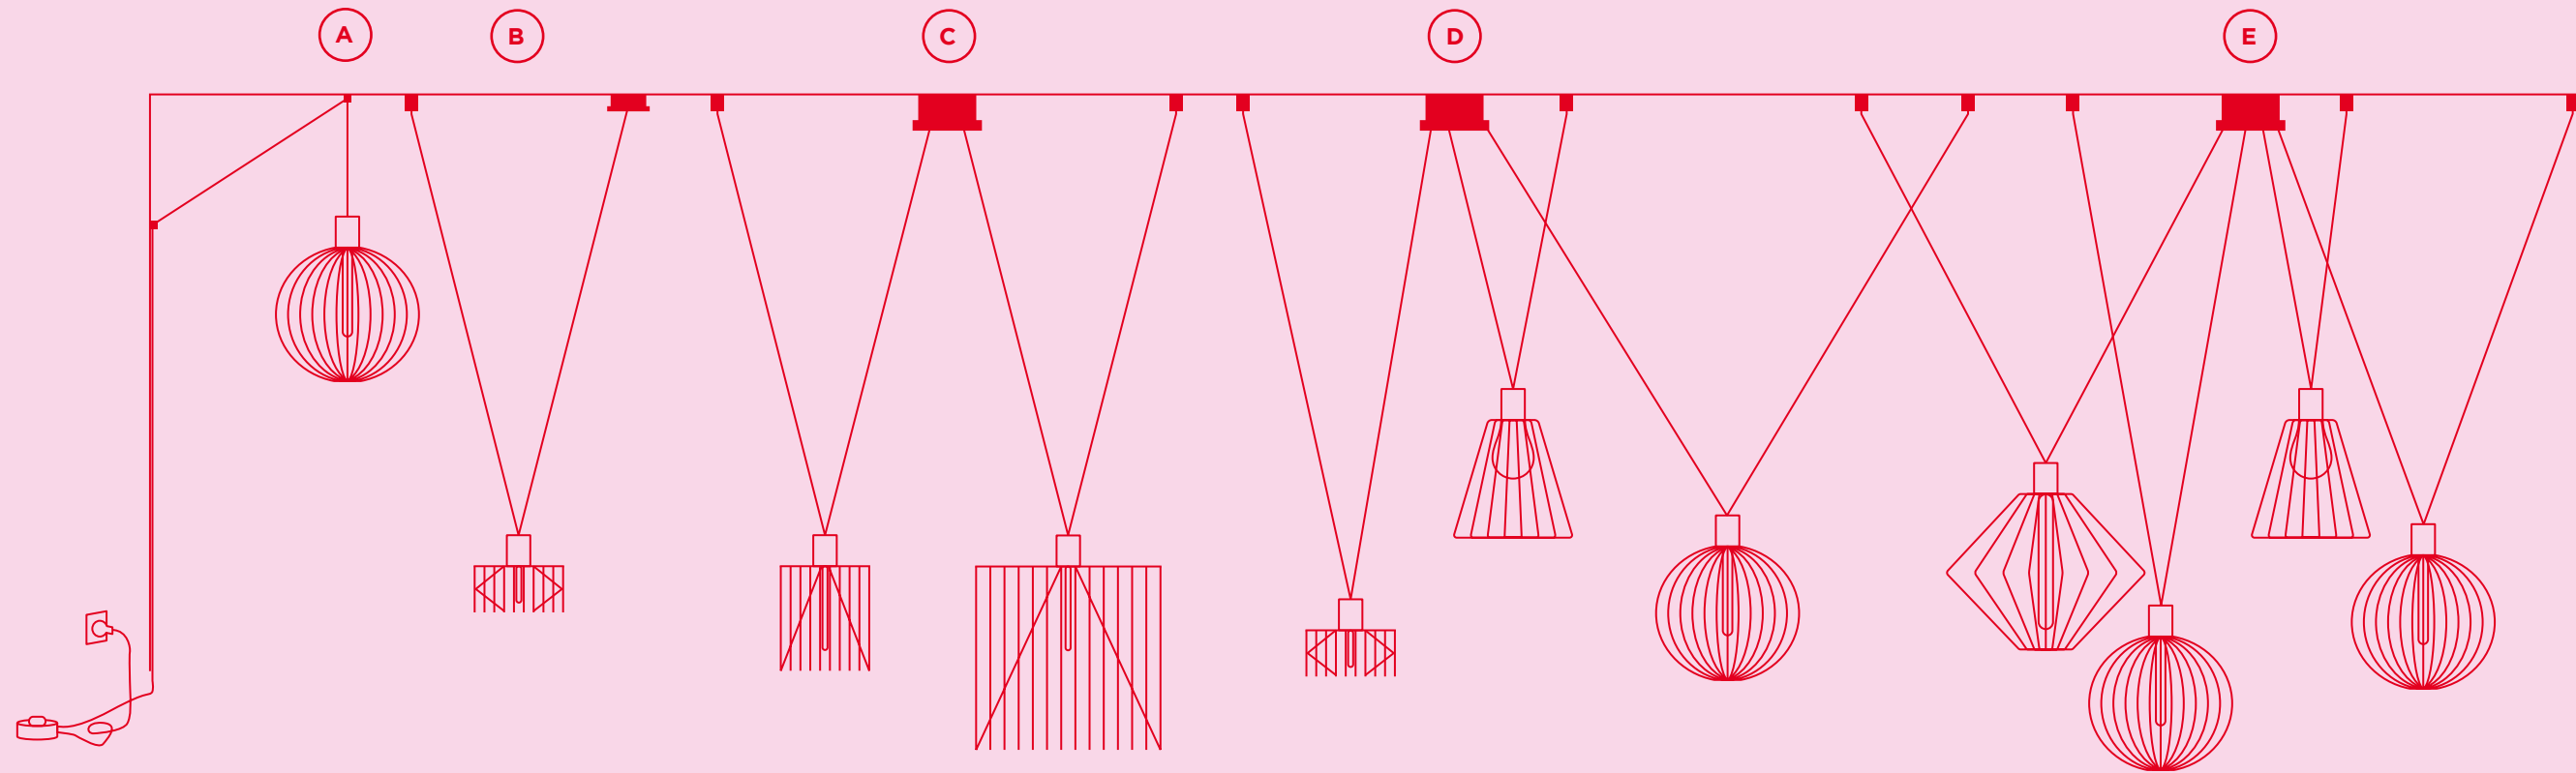


Choose your decenter



1.0 CONE

	CODE
	245100V0
	245100B0




2.0 WIRO

	CODE
	209600B0



1.8 WIRO

	CODE
	209200V0
	209200B0



3.8 WIRO

	CODE
	209300V0
	209300B0



1.1 DIAMOND

	CODE
	244100P0
	244100B0



4.0 GLOBE

	CODE
	243100B0

A **CABLE PLUG AND PLAY**
 E27 LED 4-25W | connector set for one shade | black textile cable incl. cable plug with dimmer | 2 cable brackets included
 CODE
 8.5m 90015165

B **DECENTER SET 1.0**
 A60 max. 60W | E27 220-240VAC | 50-60Hz suspension set for 1 shade round ceiling base | black textile cable 1 base + 1 end stop included
 CODE
 2.6m 90052050
 6m 90052051

C **DECENTER SET 2.0**
 2x A60 max. 60W | E27 220-240VAC | 50-60Hz suspension set for 2 shades round ceiling base | black textile cable 1 multibase + 2 end stops included
 CODE
 2.6m 90052055
 6m 90052056

D **DECENTER SET 3.0**
 3x A60 max. 60W | E27 220-240VAC | 50-60Hz suspension set for 3 shades round ceiling base | black textile cable 1 multibase + 3 end stops included
 CODE
 2.6m 90052060
 6m 90052063


E **DECENTER SET 4.0**
 4x A60 max. 60W | E27 220-240VAC | 50-60Hz suspension set for 4 shades round ceiling base | black textile cable 1 multibase + 4 end stops included
 CODE
 2.6m 90052067
 6m 90052078



OTHER LENGTHS ONLINE
weverducre.com/more-wiro

WIRO


Ceiling suspended



265



569



1.0 CONE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20 1.60kg


	CODE
	2451E0V0
	CODE
	2451E0B0

more suspension options on page 415

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
	2200K 382lm
	CODE
	2700K 425lm



2.0 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20 0.82kg

	CODE
	2096E0B0


more suspension options on page 415

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
	2200K 247lm

	CODE
	A60 5.6W E27 phase-cut dim clear
	CODE
	2700K 483lm




back



WIRO


Ceiling suspended



1.8 WIRO

⦿ A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 1.70kg



3.8 WIRO

⦿ A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 2.75kg

	CODE
	2092E0V0
	2092E0B0

more suspension options on page 415

	CODE
	2093E0V0
	2093E0B0

more suspension options on page 415

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



OTHER LENGTHS ONLINE
weverducre.com/more-wiro



265




569



WIRO

Ceiling suspended



6.1 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20 3.22kg

	CODE
	2094E0V0
	2094E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138


T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135



OTHER LENGTHS ONLINE

weverducre.com/more-wiro



6.5 WIRO

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20 4.42kg

	CODE
	2095E0V0
	2095E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted


	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted


	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135



265



569



1.0 DIAMOND

☐ T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 3.52kg

	CODE
	2291E0P0
	2291E0B0

OPTIONAL

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135




OTHER LENGTHS ONLINE
weverducre.com/more-wiro

WIRO

Ceiling suspended



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design

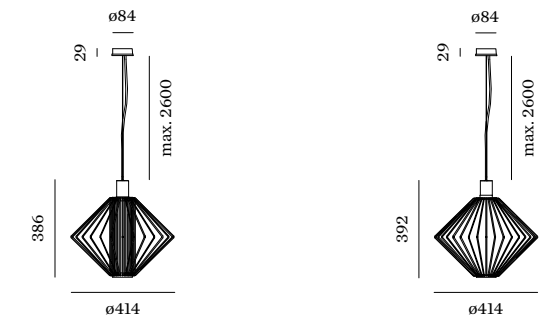

1.1 DIAMOND

☐ T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 2.72kg

	CODE
	2441E0P0
	2441E0B0

more suspension options on page 415

OPTIONAL


T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135



WIRO


Ceiling suspended



265



569



2.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel


⊕ IP20 5.62kg

	CODE
	2292E0P0
	2292E0B0

OPTIONAL

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135

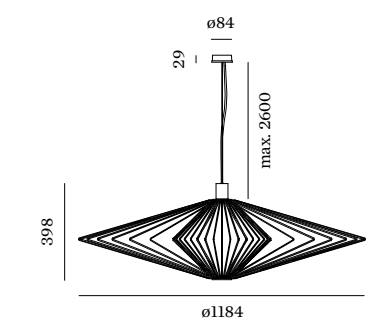

3.0 DIAMOND

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 7.02kg

	CODE
	2293E0P0
	2293E0B0


OPTIONAL

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

	CODE
2200K 585lm	9003E130
2700K 613lm	9003E135



OTHER LENGTHS ONLINE
weverducre.com/more-wiro




back



WIRO

Ceiling suspended



1.0 GLOBE

T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20 5.92kg

CODE
2281E0B0

OPTIONAL


A60 3.8W | E27 | phase-cut dim
gold tinted

CODE
2200K | 247lm 9003E109

A60 5.6W | E27 | phase-cut dim | clear
CODE
2700K | 483lm 9003E138

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted

CODE
2200K | 585lm 9003E130
2700K | 613lm 9003E135



2.0 GLOBE

A60 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

IP20 4.42kg

CODE
2282E0B0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

CODE
2200K | 247lm 9003E109

A60 5.6W | E27 | phase-cut dim | clear
CODE
2700K | 483lm 9003E138

T30-300 7.2W/74W | E27
phase-cut dim | gold tinted


CODE
2200K | 585lm 9003E130
2700K | 613lm 9003E135



OTHER LENGTHS ONLINE
weverducre.com/more-wiro



OFFICE KBC VAN CAUTEREN | INTERIEUR LIN DILBEEK | BELGIUM



4.0 GLOBE

□ T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 1.92kg

CODE

2431E0B0


more suspension options on page 415

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

CODE

2200K | 382lm 9003E129
2700K | 425lm 9003E136



5.0 GLOBE

□ T30 max. 60W | E27
220-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 3.32kg

CODE

2432E0B0

more suspension options on page 415

OPTIONAL

T30-300 7.2W/7.4W | E27 | phase-cut dim
gold tinted

CODE

2200K | 585lm 9003E130
2700K | 613lm 9003E135



OTHER LENGTHS ONLINE

weverducre.com/more-wiro

BERND STEINHUBER

WIRO

Ceiling suspended

265


265

265

569


569

569



back

WEVER & DUCRÉ 428 – 429




1.0

⦿ A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel


⦿ IP20 0.70kg



GB



NB



LB

CODE	
	6341E0GB0
	6341E0NB0
	6341E0LB0


OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

CODE	
2700K 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

CODE	
2700K 409lm	9003E140



2.0

⦿ G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

⦿ IP20 1.00kg

CODE	
	6342E0GB0
	6342E0NB0
	6342E0LB0


OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



3.0

⦿ G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

⦿ IP20 2.10kg

CODE	
	6343E0GB0
	6343E0NB0
	6343E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

MIRRO

Ceiling suspended




267





581



651 | 663



back



MIRRO SOFT

Ceiling suspended

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material

IP20 0.68kg/0.81kg

CODE	
	6342E0MF0
	6342E0LF0
	6342E0IF0
	6342E0AF0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
clear

CODE	
2700K 483lm	9003E160

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material

IP20 1.21kg/1.34kg

CODE	
	6343E0MF0
	6343E0LF0
	6343E0IF0
	6343E0AF0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
clear

CODE	
2700K 483lm	9003E160



OTHER LENGTHS ONLINE
weverducre.com/more-mirro



269



585



COMBINE IT WITH OTHER OPTIONS
weverducre.com/mirro






HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM



J.J.W.

Ceiling suspended



04

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20 4.50kg

	CODE
	2052E0S0
	2052E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138




MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



J.J.W.

Ceiling suspended



042

6x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20 8.10kg

	CODE
	2056E0S0
	2056E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

	CODE
2200K 247lm	9003E109

A60 5.6W | E27 | phase-cut dim | clear

	CODE
2700K 483lm	9003E138



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT
VINEUIL-SAINT-FIRMIN | FRANCE



► DESIGN WITH LOVE




MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT VINEUIL-SAINT-FIRMIN | FRANCE



J.J.W.


Ceiling suspended



273



573



05

3x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20 8.50kg

CODE

2053E0S0

2053E0G0

OPTIONAL

A60 3.8W | E27 | phase-cut dim
gold tinted

CODE

2200K | 247lm 9003E109

A60 5.6W | E27 | phase-cut dim | clear

CODE

2700K | 483lm 9003E138




APARTMENT RONDA SANT PERE | DANIEL NASSAR | ALSINASECH LIGHTING PROJECTS SPAIN

ROOMOR

Ceiling suspended




reddot award 2019
winner lighting design



1.1 PAR16

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium


IP20 0.80kg



1.1 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20 0.84kg



1.2 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

IP20 1.11kg(0.90kg)



CODE
248120GG1
248120BK1
248120BB1

CODE
2481E0GG1
2481E0BK1
2481E0BB1

CODE
2481E0BF2
2481E0BK2
2481E0BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE
2700K 460lm 901228W3
2700K 437lm 901228B3
3000K 500lm 901228W5
3000K 457lm 901228B5

OPTIONAL

CODE
A60 9W E27 phase-cut dim opal
2700K 800lm 9003E152


OPTIONAL

CODE
A60 9W E27 phase-cut dim opal
2700K 800lm 9003E152



OTHER LENGTHS ONLINE
weverducre.com/more-roomor

3H DRAFT



back




ROOMOR

Ceiling suspended



reddot award 2019
winner lighting design



1.3 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | grey felt

⊕ IP20 1.60kg/1.48kg



BF3



BK3



BB3




BK4



BB4

OPTIONAL

A60 9W | E27 | phase-cut dim | opal
CODE
2700K | 800lm 9003E152



1.4 E27

A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

⊕ IP20 1.72kg

CODE	
	2481E0BK4
	2481E0BB4

OPTIONAL

A60 9W | E27 | phase-cut dim | opal
CODE
2700K | 800lm 9003E152



OTHER LENGTHS ONLINE
weverducre.com/more-roomor





WEVER & DUCRÉ OFFICE ITALY SAN DONÀ DI PIAVE - VENEZIA | ITALY



ROOMOR OFFICE


Ceiling suspended



reddot winner 2021



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



1.0 MICROPRISMATIC

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium
microprismatic PMMA cover

IP20 SDCM3 L80/60K UGR ≤ 19 4.62kg

3000K | CRI >90 | 3660lm

CODE

1681M5W5



1681M5B5

4000K | CRI >90 | 3660lm

CODE

1681M5W7

1681M5B7



1.0 OPAL

LED PCB 35W | DALI-2 | push dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover

IP20 SDCM3 L80/60K 4.62kg

3000K | CRI >90 | 3700lm

CODE

168185W5

168185B5

4000K | CRI >90 | 3700lm

CODE

168185W7

168185B7



LINK LAB CREATIVE OFFICES | STAY STUDIO KORTRIJK | BELGIUM






BISHOP

Ceiling suspended



reddot award 2015
honourable mention



4.0

⦿ A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite


⊕ IP20 1.08kg

CODE	
	2184E0W0
	2184E0R0
	2184E0D0
	2184E0K0

6m suspension on request



custom shade and suspension
set colour combination upon request



6.0

⦿ A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite

⊕ IP20 2.62kg

CODE	
	2186E0W0
	2186E0R0
	2186E0D0
	2186E0K0

6m suspension on request


OPTIONAL

G95 5.4W | E27 | phase-cut dim
gold tinted

CODE	
2200K 380lm	9003E111

G95 11.2W | E27 | phase-cut dim | opal

CODE	
2700K 1100lm	9003E154



8.0

⦿ A60/G95 max. 25W | E27
220-240VAC | 50-60Hz
composite

⊕ IP20 5.70kg

CODE	
	2188E0W0
	2188E0R0
	2188E0D0
	2188E0K0

6m suspension on request

OPTIONAL

G95 5.4W | E27 | phase-cut dim
gold tinted

CODE	
2200K 380lm	9003E111

G95 11.2W | E27 | phase-cut dim | opal

CODE	
2700K 1100lm	9003E154



custom colour combination
and custom track mounted

SPOT LANDING FOR YOUR FAVOURITE LIGHT


Choose your base

If you have fallen in love with one of our luminaires, but need a matching ceiling rose: Then perhaps we can play matchmaker. The choice basically comes down to single or multiple pendant roses. For single pendants, they are either surface mounted, semi-recessed or invisible. The multiple pendant ceiling rose is available in a round or rectangular shape. And last but not least, there is also a wall version with an integrated light switch. Have you found your match? Then all that remains to do now is decide on a suitable lampshade and a suitable colour on the following pages.

Sie haben sich in eine unserer Leuchten verliebt und suchen jetzt nach dem passenden Baldachin? Dann spielen wir hier mal kurz die Vermittlungsbörse. Grundsätzlich können Sie zwischen Einzel- oder Multiabhängung wählen. Bei der Einzelabhängung gibt es eine Aufbau-, eine Semi-Recessed, oder eine Invisible-Variante. Den Multibaldachin gibt es in runder oder gerader Form. Und zu guter Letzt die Wandvariante mit integriertem Lichtschalter. Na, ein Match gefunden? Dann müssen Sie sich jetzt nur noch für einen passenden Lampenschirm auf den nächsten Seiten und eine passende Farbe entscheiden.




weverducre.com/suspension-options

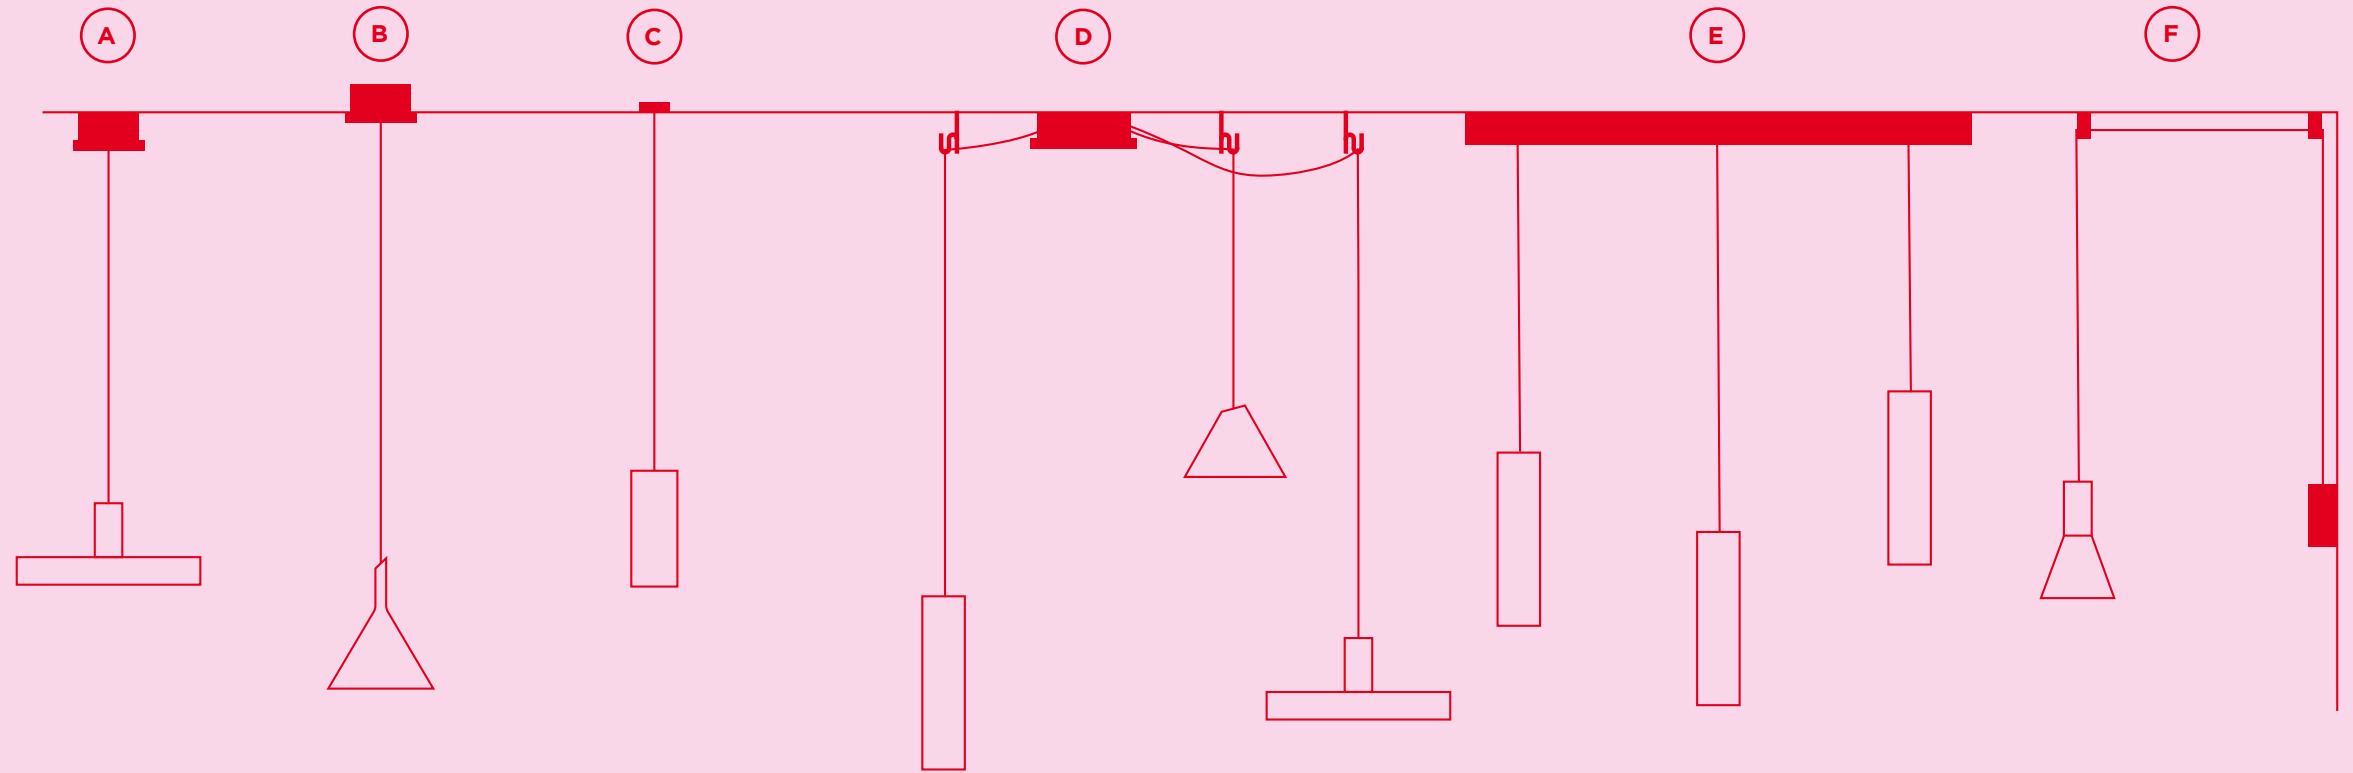

A | SINGLE BASE
ceiling base round


	CODE
	90052022
	90052021



B | SEMI RECESSED SINGLE BASE
for shades without steel wire only

Ⓢ 73-76 Ⓢ 70 Ⓢ 10-35


	CODE
	90052026
	90052027



C | INVISIBLE SINGLE BASE
plasterkit | system - with fixation and adjustment with or without steel cable | max. 10kg


Ⓢ 68 Ⓢ 70 Ⓢ 12.5-27.50

	CODE
	90015196
	90015195




D | MULTIPLE BASE
up to max. 4 | 8 luminaires

	CODE
max. 4	90052005
max. 4	90052006
max. 8	90052031
max. 8	90052032

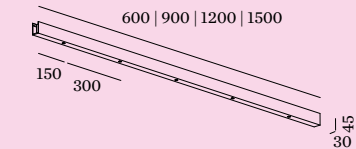

E | LINEAR MULTIPLE BASE
up to max. 2 | 3 | 4 | 5 luminaires
600mm | 900mm | 1200mm | 1500mm

	CODE
max. 2	90052007
max. 2	90052008
max. 3	90052009
max. 3	90052010
max. 4	90052011
max. 4	90052012
max. 5	90052013
max. 5	90052014



F | WALL BASE
for 1 luminaire | incl. 2 wall-ceiling brackets | for cable 4.25-5.5mm diameter | incl. switch on/off

	CODE
	90019195
	90019196

wall - ceiling bracket

	CODE
	90019197
	90019198






RESTAURANT GOLDMARIE | LUKAS NOBILI MAINZ GERMANY

ODREY

Ceiling suspended



1.1


PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.95kg

1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.26kg



CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

	CODE
	287120WW0
	287120GG0
	287120BB0
	287120WG0
	287120BG0
	287120GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

	CODE
	287320WW0
	287320GG0
	287320BB0
	287320WG0
	287320BG0
	287320GB0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5






HOTEL MEERBERG PERTISAU | AUSTRIA

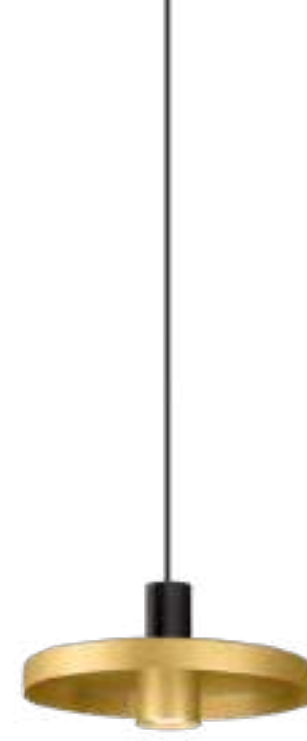

ODREY


Ceiling suspended



1.2

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | shade matching
inner cover included

IP20 0.47kg

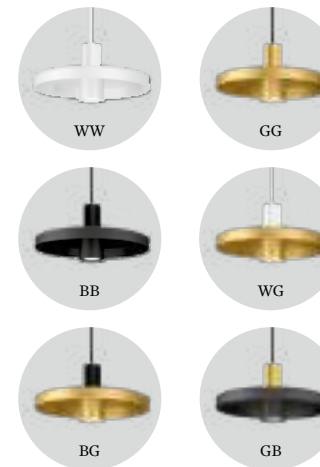

CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

	CODE
	287220WW0
	287220GG0
	287220BB0
	287220WG0
	287220BG0
	287220GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



CECI PICCOLA CUCINA | STUDIOZERO85 | DANILO CASTALDI LIGHTING
CONSULTANT PESCARA | ITALY



ODREY

Ceiling suspended

1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0.30kg

CODE

287420WW0
287420GG0
287420BB0
287420WG0
287420BG0
287420GB0

A | Single base
ceiling base round | ø84

CODE
90052022
90052021

B | Semi recessed single base
C | Invisible single base
D | Multiple base
E | Linear multiple base
F | Wall base

more infos on page 458

1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0.90kg

CODE

287520WW0
287520GG0
287520BB0
287520WG0
287520BG0
287520GB0

OPTIONAL
PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

1.6

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0.75kg

CODE


287620WW0
287620GG0
287620BB0
287620WG0
287620BG0
287620GB0

OPTIONAL
PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5


optional inner cover on page 755



1.7

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP20 0.30kg



1.8

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | shade matching
inner cover included

⊕ IP20 0.41kg




WW




BB




BG



GG



WG



GB

CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

	CODE
	287720WW0
	287720GG0
	287720BB0
	287720WG0
	287720BG0
	287720GB0

optional inner cover on page 755

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

	CODE
	287820WW0
	287820GG0
	287820BB0
	287820WG0
	287820BG0
	287820GB0

OPTIONAL



PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5



RAY


Ceiling suspended



189



317 | 343 | 355




545



689



721



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 - A 36° SDCM2 L80|55K 0.62|0.76kg

2.0

200mm

CODE

	226764W_
	226764L_
	226764G_
	226764M_
	226764P_
	226764B_

3.0

300mm

CODE

	226864W_
	226864L_
	226864G_
	226864M_
	226864P_
	226864B_

CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

LIGHT COLOUR	LUMEN CRI	CODE
2700K	405 >90	3
3000K	430 >90	5
2000-3000K	9W 570 >90	9

white fixtures with white cable

other fixtures with black cable

more colour combinations on request

2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.54|0.68kg

2.0

200mm

CODE

	227720W0
	227720L0
	227720G0
	227720M0
	227720P0
	227720B0

3.0

300mm


CODE

	227820W0
	227820L0
	227820G0
	227820M0
	227820P0
	227820B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim


	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5





HEXO


Ceiling suspended



181



315 | 343 | 355



2.0 | 3.0 LED

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 36° SDCM2 L80|55K 0.66|0.82kg

2.0

200mm	CODE
	226364G_
	226364Q_
	226364P_
	226364B_

3.0

300mm	CODE
	226464G_
	226464Q_
	226464P_
	226464B_

CHOOSE YOUR BASE

A | Single base
ceiling base round | ø84


CODE	
	90052022
	90052021

- B | Semi recessed single base**
- C | Invisible single base**
- D | Multiple base**
- E | Linear multiple base**
- F | Wall base**

more infos on page 458

LIGHT COLOUR	LUMEN CRI	CODE
2700K	420 >90	3
3000K	440 >90	5
2000-3000K	9W 570 >90	9

white fixtures with white cable
other fixtures with black cable
more colour combinations on request



2.0 | 3.0 PAR16

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.58|0.74kg

2.0

200mm	CODE
	227320G0
	227320Q0
	227320P0
	227320B0

3.0

300mm	CODE
	227420G0
	227420Q0
	227420P0
	227420B0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5








WETRO

Ceiling suspended



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

all fixtures with black cable
white cable on request

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM3 L80|50K 0.56kg

1800-2850K | CRI >90 | 375lm

	CODE
	236188P9

1800-2850K | >90 CRI | 525lm

	CODE
	236188B9

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass

IP20 SDCM3 L80|50K 0.97kg

1800-2850K | CRI >90 | 385lm

	CODE
	236288P9

1800-2850K | >90 CRI | 510lm

	CODE
	236288B9

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal hand blown glass


IP20 SDCM3 L80|50K 1.69kg

1800-2850K | CRI >90 | 445lm

	CODE
	236388P9

1800-2850K | >90 CRI | 530lm

	CODE
	236388B9











WETRO

Ceiling suspended



CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84



- B | Semi recessed single base**
- C | Invisible single base**
- D | Multiple base**
- E | Linear multiple base**
- F | Wall base**

more infos on page 458

all fixtures with black cable
white cable on request

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM3 L80|50K 0.56kg

1800-2850K | CRI >90 | 500lm



1800-2850K | CRI >90 | 460lm



2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM3 L80|50K 0.97kg

1800-2850K | CRI >90 | 430lm



1800-2850K | CRI >90 | 420lm



3.0


LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
artisanal Italian hand blown glass

IP20 SDCM3 L80|50K 1.69kg

1800-2850K | CRI >90 | 470lm



1800-2850K | CRI >90 | 440lm






CLEA

Ceiling suspended

new




1.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white opal glass hand blown

IP20 SDCM2 L80I50K 0.80kg

CODE
90052022




2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white opal glass hand blown

IP20 SDCM2 L80I50K 1.34kg

CODE
281784W_
281784SG_
281784FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	760	>90	5



3.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
white opal glass hand blown

IP20 SDCM2 L80I50K 2.14kg

CODE
281884W_
281884SG_
281884FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	760	>90	5

CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

CODE
90052022

B | Semi recessed single base

C | Invisible single base

D | Multiple base

more infos on page 458

all fixtures with white cable
black cable on request

CODE
281784W_
281784SG_
281784FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	760	>90	5

CODE
281884W_
281884SG_
281884FJ_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	760	>90	5

CODE
281984W_
281984SG_
281984FJ_



LIGHT COLOUR	LUMEN	CRI	CODE
2700K	710	>90	3
3000K	760	>90	5





SHIEK

Ceiling suspended



CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

all fixtures with black cable
white cable on request

1.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|50K 0.36kg

1800-2850K | CRI >90 | 525lm

	CODE
	237188W9
	237188J9
	237188P9
	237188K9
	237188Z9


2.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|50K 0.47kg

1800-2850K | CRI >90 | 525lm

	CODE
	237288W9
	237288J9
	237288P9
	237288K9
	237288Z9





SHIEK


Ceiling suspended



reddot award 2017
winner



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



3.0 LED

LED LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80I50K 0.60kg

1800-2850K | CRI >90 | 525lm

CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

CODE	Color swatch
90052022	[White swatch]
90052021	[Black swatch]

B | Semi recessed single base

C | Invisible single base


D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

all fixtures with black cable
white cable on request



3.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium

IP20 0.60kg


CHOOSE YOUR BASE

CODE	Color swatch
2343E0W0	[White swatch]
2343E0J0	[Yellow swatch]
2343E0P0	[Orange swatch]
2343E0K0	[Black swatch]
2343E0Z0	[Brown swatch]

OPTIONAL

A60 9W opal | E27 | phase-cut dim



CODE	Color swatch
9003E152	[White swatch]





SHIEK

Ceiling suspended



4.0 LED

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80I50K 0.70kg

1800-2850K | CRI >90 | 525lm

CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

CODE	Color
90052022	White
90052021	Black

B | Semi recessed single base

C | Invisible single base

D | Multiple base

E | Linear multiple base

F | Wall base

more infos on page 458

all fixtures with black cable
white cable on request

4.0 E27

A60 max. 20W | E27
100-240VAC | 50-60Hz
aluminium


IP20 0.70kg

CODE	Color
2344E0W0	White
2344E0J0	Yellow
2344E0P0	Copper
2344E0K0	Black
2344E0Z0	Dark Grey

OPTIONAL

A60 9W opal | E27 | phase-cut dim




CODE	Color
9003E152	White





DINOR

Ceiling suspended



CHOOSE YOUR BASE

A | Single base

ceiling base round | ø84

	CODE
	90052022
	90052021

B | Semi recessed single base

C | Invisible single base

more infos on page 458

all fixtures with black cable
white cable on request

1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 0.90kg

1800-2850K | CRI >90 | 525lm

	CODE
	255188GW9
	255188BG9
	255188BB9

2.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 1.30kg

1800-2850K | CRI >90 | 525lm

	CODE
	255288GW9
	255288BG9
	255288BB9

3.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 2.30kg

1800-2850K | CRI >90 | 525lm

	CODE
	255388GW9
	255388BG9
	255388BB9



RESTAURANT VINA | INNOCAD ARCHITECTURE GRAZ | AUSTRIA



RECESSED



RETO 0.8
499



RETO 2.0
499



LITO 1.0
501



LITO 2.0
501



STRIPE
503



**STRANGE
TRIMLESS**
505



THEMIS
507



ORIS 0.7
509



ORIS 0.8
509





ORIS 1.3
509



RETO

Wall recessed



0.8

LED PCB 3W | 350mA | 9V
aluminium

IP20 SDCM3 L80|50K 0.27kg

66x66 | 40 | min. 12

3000K | CRI >90 | 150lm

	CODE
	3451A1W5
	3451A1L5
	3451A1M5
	3451A1Q5
	3451A1B5

ALWAYS USE

driver | 350mA

	CODE
6W	90213202

more options and specs on page 806

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 818

2.0

LED PCB 6W | 350mA | 18V
aluminium

IP20 SDCM3 L80|50K 0.41kg

47x182 | 40 | min. 12

3000K | CRI >90 | 490lm

	CODE
	3452A1W5
	3452A1B5

ALWAYS USE

driver | 350mA

	CODE
6W	90213202

more options and specs on page 806

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 818


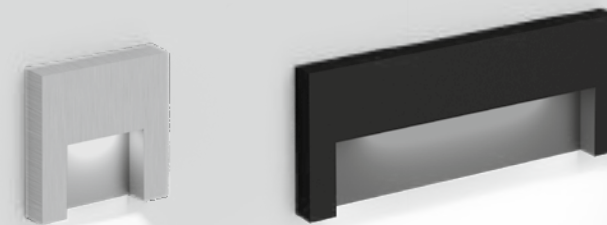


back



LITO

Wall recessed



1.0

LED PCB 2/3W | 350/500mA | 6V aluminium | anod.

IP20 SDCM3 L80|60K 0.09kg

70x70 | 35mm min. 12

3000K | CRI >90 | 145/200lm

	CODE
	145381W5
	145381A5
	145381B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 500mA	90214201

more options and specs on page 806

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119

recessed housing | always use in combination with plasterkit

2.0

LED PCB 2/3W | 350/500mA | 6V aluminium | anod.

IP20 SDCM3 L80|60K 0.09kg

70x70 | 35mm min. 12

3000K | CRI >90 | 90/120lm

	CODE
	1454A1W5
	1454A1A5
	1454A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 500mA	90214201

more options and specs on page 806

OPTIONAL

	CODE
recessed housing	90012027
plasterkit	90017119


recessed housing | always use in combination with plasterkit





STRIPE

Wall recessed



0.4

LED PCB 1/2W | 350/700mA | 3V aluminium

IP20 SDCM3 L70|60K 0.09kg

25x56 40 8-18

3000K | CRI >80 | 15/28lm

CODE	
	3054A1W4
	3054A1L4
	3054A1G4
	3054A1B4

ALWAYS USE

driver

CODE	
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 806

OPTIONAL

recessed housing incl. plasterkit

CODE	
	90012037

specs on page 818



0.7

LED PCB 1/2W | 350/700mA | 3V aluminium

IP20 SDCM3 L70|60K 0.10kg

25x56 40 8-18

3000K | CRI >80 | 15/28lm

CODE	
	3055A1W4
	3055A1L4
	3055A1G4
	3055A1B4

ALWAYS USE

driver

CODE	
6W 350mA	90213202
6W 700mA	90215203


more options and specs on page 806

OPTIONAL

recessed housing incl. plasterkit

CODE	
	90012037

specs on page 818



2.2

LED PCB 1/2W | 350/700mA | 3V aluminium

IP20 SDCM3 L70|60K 0.27kg

25x170 40 8-18

3000K | CRI >80 | 20/36lm

CODE	
	3056A1W4
	3056A1L4
	3056A1G4
	3056A1B4

ALWAYS USE

driver

CODE	
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 806

OPTIONAL

recessed housing incl. plasterkit



CODE	
	90012038

specs on page 818



STRANGE trimless

Wall recessed



1.7

LED PCB 3/5W | 500/700mA | 6V
aluminium | incl. plasterkit

IP20 SDCM3 L80|60K 0.24kg

170x86 11.55 2-25

CODE

3207A1W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240/320 >80	2
3000K	260/350 >80	4

ALWAYS USE

driver

CODE

6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 808

2.7

LED PCB 3/5W | 500/700mA | 6V
aluminium | incl. plasterkit

IP20 SDCM3 L80|60K 0.31kg

270x86 11.55 2-25

CODE

3208A1W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240/320 >80	2
3000K	260/350 >80	4

ALWAYS USE

driver

CODE

6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 808




SHOWROOM GRANDO KEUKENS BRUGES | BELGIUM



THEMIS

Wall recessed




1.7

LED PCB 3/5W | 500/700mA | 6V aluminium

IP20 SDCM3 L80|60K 0.24kg

70x158 50 2-18



2.7

LED PCB 3/5W | 500/700mA | 6V aluminium

IP20 SDCM3 L80|60K 0.31kg

70x258 50 2-18

CODE	
	3237AIW_
	3237AIK_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240/320 >80	2
3000K	260/350 >80	4

ALWAYS USE

driver



CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 808

OPTIONAL

CODE	
recessed housing	90012032
plasterkit	90017111

recessed housing | always use in combination with plasterkit

CODE	
	3238AIW_
	3238AIK_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	240/320 >80	2
3000K	260/350 >80	4

ALWAYS USE

driver


CODE	
6W 500mA	90214201
6W 700mA	90215203

more options and specs on page 808

OPTIONAL

CODE	
recessed housing	90012033
plasterkit	90017112

recessed housing | always use in combination with plasterkit



0.7

LED PCB 2/5W | 350/700mA | 6V aluminium

IP20 SDCM3 L70|60K 0.28kg

47x182 40 min. 12

3000K | CRI >90 | 70/115lm

	CODE
	3271A1W5
	3271A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 806

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044

specs on page 818



0.8

LED PCB 2/5W | 350/700mA | 6V aluminium

IP20 SDCM3 L70|60K 0.15kg

66x66 40 min. 12

3000K | CRI >90 | 90/140lm

	CODE
	3274A1W5
	3274A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
6W 700mA	90215203

more options and specs on page 806

OPTIONAL


recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

specs on page 818



1.3

LED PCB 3/7W | 350/700mA | 9V aluminium

IP20 SDCM3 L70|60K 0.34kg

115x117 40 min. 12

3000K | CRI >90 | 140/220lm

	CODE
	3276A1W5
	3276A1B5

ALWAYS USE

driver

	CODE
6W 350mA	90213202
7W 700mA	90215301

more options and specs on page 806

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

specs on page 818



LUMINAIRES



CENO
513

MATCH
515

TRACE
517

TRACE SLIM
521

ODREY
525



BOX MINI
533



BOX
535



DOCUS MINI
539



HEXO MINI
541



RAY MINI
543



RAY
545




FINLIN
609



FINLIN ROUND
613



FIL SPIN
615



VENN
617



TRAIN
549



CENTRAL
551



LEENS
553



BENTO
555



DRO
557



DARF
559

SPOTLIGHTS



SARA SNOOZE
621



MATCH SNOOZE
623



MICK SNOOZE
625



MICK WALL 1.0
627

UPLIGHTS



DOMINO
629



SCAVA
631

IP-RATED



PERLEZ IP44
635



PERLEZ CLIP IP44
637



RUVI IP44
639



MIRBA IP44
641



MIRBI LONG IP44
643



ROOMOR
561



WIRO
569



CLEA
571



J.J.W.
573




MIRRO
581




MIRRO SOFT
585



DOT
587




TAPIS
591



TAPIS SOFT
597



MILES ROUND
601



MILES CARRÉ
605



MILES
607



CENO

Wall surface




119



227




303 | 353



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 ⚡ 31° SDCM2 L70/55K 0.28kg



honeycomb

OPTIONAL


honeycomb louvers



CODE
376264W_
376264Q_
376264CH_
376264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x280 >90	3
3000K	2x300 >90	5

CODE
90051131



back



MATCH

Wall surface



reddot winner 2023



As awarded by The Chicago Athenaeum: Museum of Architecture and Design




57 | 113 | 145

223

307 | 321

407

659




2.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 23° SDCM2 L80|50K 0.41kg

	CODE
	377264W_
	377264BL_
	377264B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x380 >90	3
3000K	2x410 >90	5



4.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 23° SDCM2 L80|50K 0.76kg

	CODE
	377464W_
	377464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x380 >90	3
3000K	4x410 >90	5

back



TRACE



Wall surface



reddot winner 2023

201 | 253 | 257



373 | 399



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 22° SDCM2 L80|50K 0.42kg



CODE		
	333164W_	
	333164H_	
	333164CH_	
	333164B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	560 >90	3
3000K	630 >90	5

2.0

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium


IP20 22° SDCM2 L80|50K 0.74kg

CODE		
	333264W_	
	333264H_	
	333264CH_	
	333264B_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x560 >90	3
3000K	2x630 >90	5

back



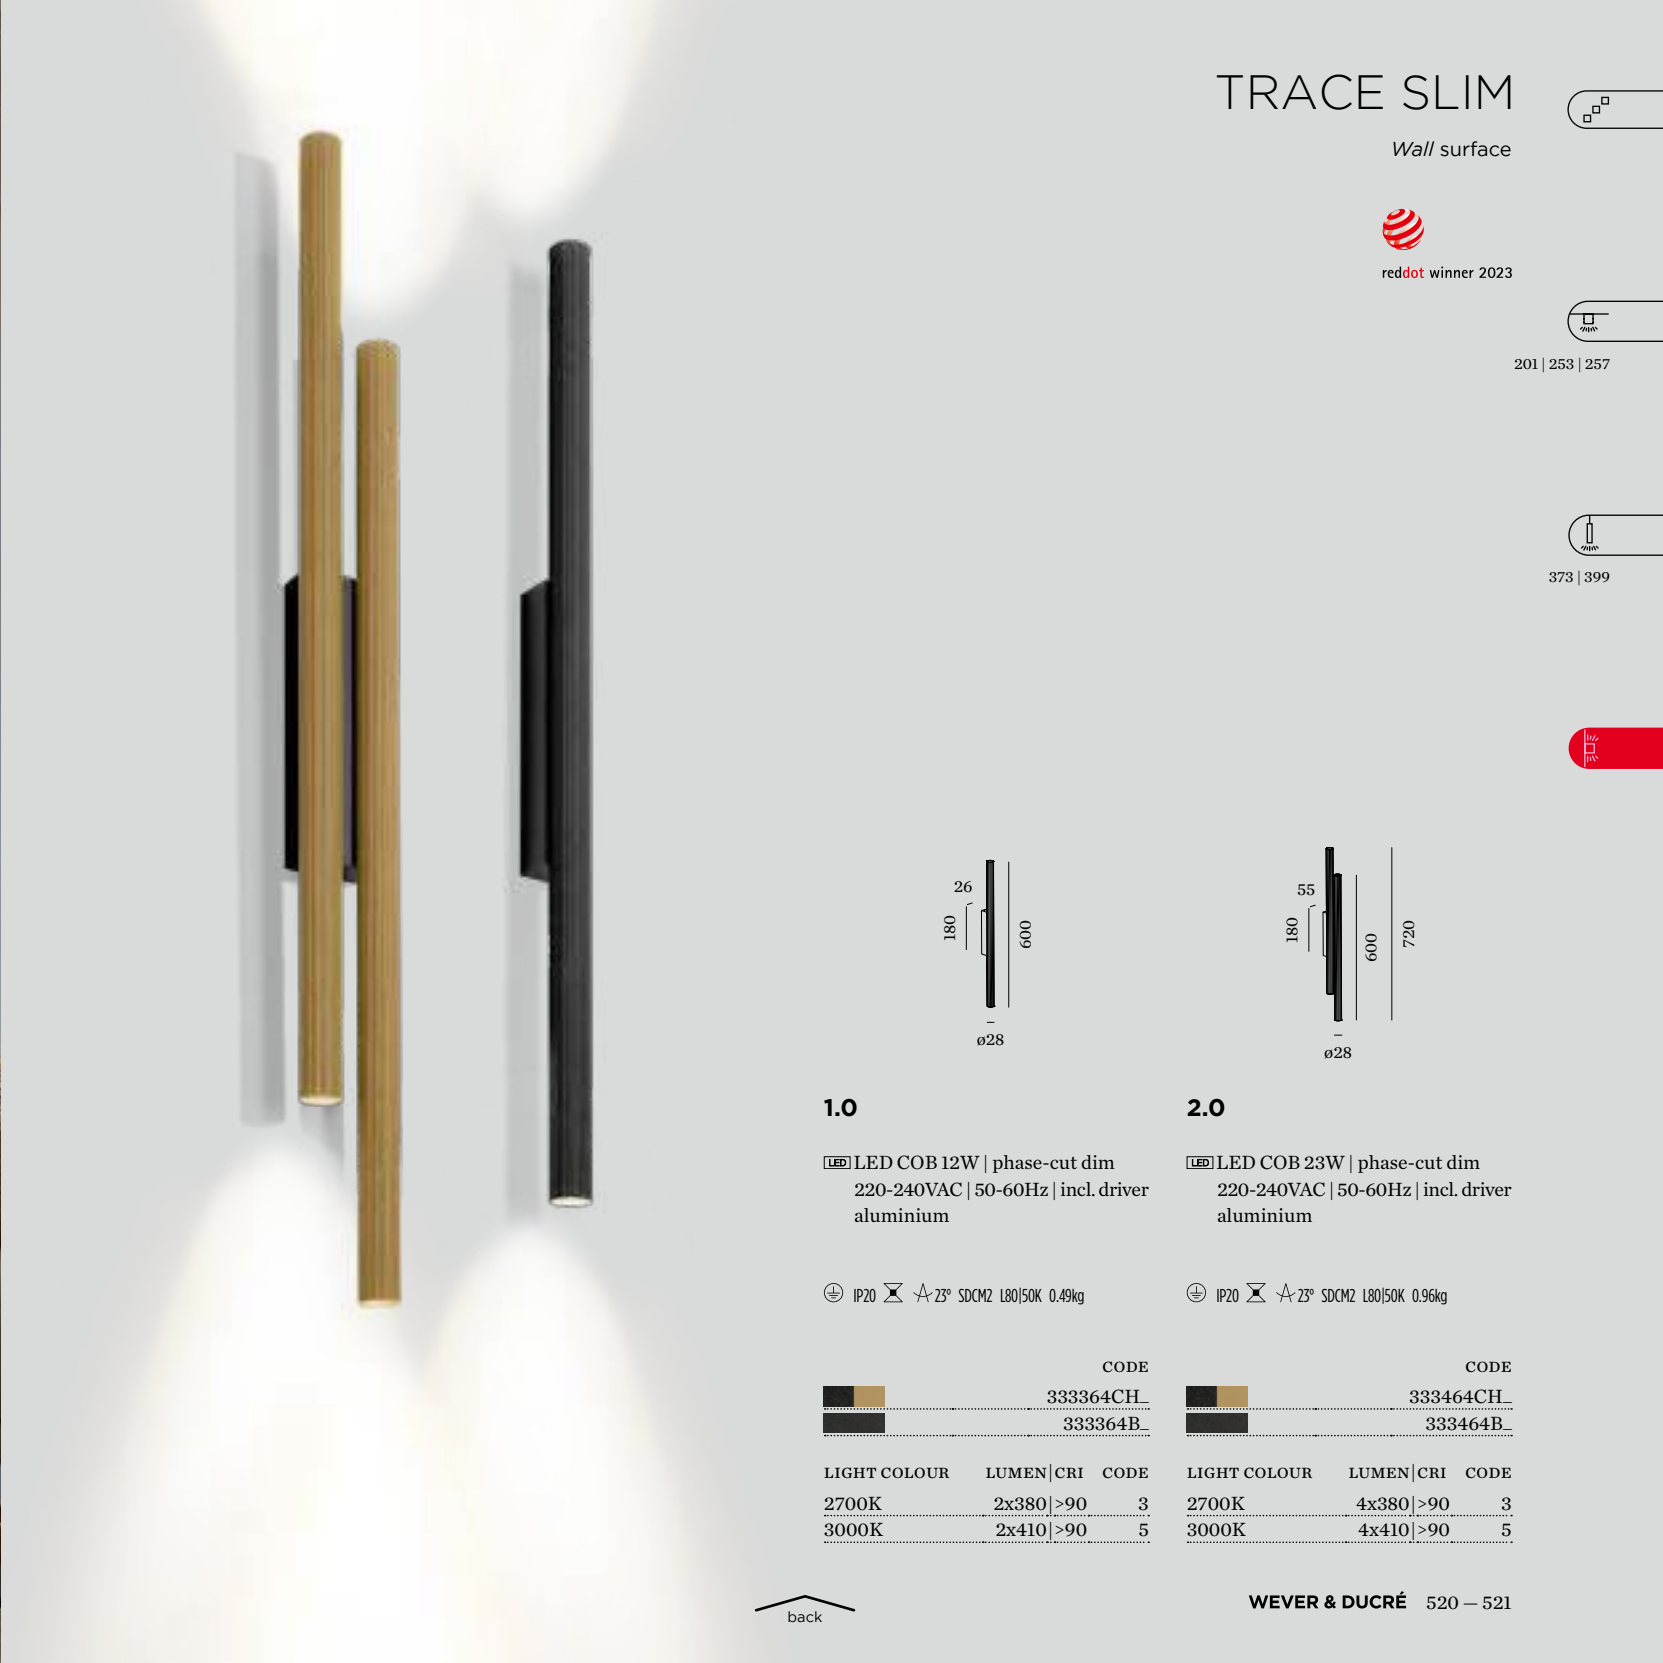

TRACE SLIM

Wall surface




reddot winner 2023



201 | 253 | 257



373 | 399




1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 23° SDCM2 L80|50K 0.49kg

CODE	
	333364CH_
	333364B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x380 >90	3
3000K	2x410 >90	5



2.0

LED COB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 23° SDCM2 L80|50K 0.96kg

CODE	
	333464CH_
	333464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	4x380 >90	3
3000K	4x410 >90	5

back



weverducre.com/odrey



ODREY ON THE WALL

She lights up every room

She exudes the elegance of the 50s like no other. And can change its look faster than any movie star. Who are we talking about? ODREY, of course. She looks stunning in almost any colour combination. And she is highly flexible in terms of the shape of the shade. There are three different shades to choose from, available in black or gold. They can be combined with two mounts in black or gold to create an ever-changing luminaire. ODREY can emit light either upwards, downwards, or in both directions, which is especially lovely. So corridors or restaurant walls can be accentuated with the utmost flair.


Sie versprüht die Eleganz der 50er wie keine andere. Und kann ihren Look schneller wechseln als jeder Filmstar. Von wem hier die Rede ist? Natürlich von ODREY, die in nahezu jeder Farbkombination umwerfend aussieht. Und sich auch in puncto Schirmform höchst flexibel zeigt. Zur Auswahl stehen drei verschiedene Shades, die in Schwarz oder Gold zu haben sind. Sie können mit je zwei Mountings in Schwarz oder Gold kombiniert werden und ergeben so immer wieder eine neue Leuchte. Besonders schön: ODREY kann das Licht entweder nach oben, nach unten oder in beide Richtungen abgeben. So können Flure oder Restaurantwände gekonnt akzentuiert werden.

Choose your very own *ODREY*.

MOUNTING + SHADES

MOUNTING

available in ● white, ● gold or ● black



direct light



direct | indirect light



SHADES

available in ● white, ● gold or ● black



ø 100



ø 124



ø 115



ø 100



ø 124



ø 115




ODREY


Wall surface




As awarded by The Chicago Athenaeum: Museum of Architecture and Design



323




461



1.3

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel


IP20 0.80kg



1.4

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20 0.34kg



1.5

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

IP20 0.36kg



CODE	
	387120WW0
	387120GG0
	387120BB0
	387120GW0
	387120BG0
	387120GB0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim		CODE	
	2700K 460lm	901228W3	
	2700K 437lm	901228B3	
	3000K 500lm	901228W5	
	3000K 457lm	901228B5	

CODE	
	387220WW0
	387220GG0
	387220BB0
	387220GW0
	387220BG0
	387220GB0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim		CODE	
	2700K 460lm	901228W3	
	2700K 437lm	901228B3	
	3000K 500lm	901228W5	
	3000K 457lm	901228B5	

CODE	
	387320WW0
	387320GG0
	387320BB0
	387320GW0
	387320BG0
	387320GB0

OPTIONAL

PAR16 6.5W GU10 phase-cut dim		CODE	
	2700K 460lm	901228W3	
	2700K 437lm	901228B3	
	3000K 500lm	901228W5	
	3000K 457lm	901228B5	

back




ODREY

Wall surface




As awarded by The Chicago Athenaeum: Museum of Architecture and Design



2.3

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel


⊕ IP20 ⏱ 0.41kg



2.4

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 ⏱ 0.50kg



2.5

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium | steel

⊕ IP20 ⏱ 0.54kg



CODE	
	387420WW0
	387420GG0
	387420BB0
	387420GW0
	387420BG0
	387420GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

CODE	
	387520WW0
	387520GG0
	387520BB0
	387520GW0
	387520BG0
	387520GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

CODE	
	387620WW0
	387620GG0
	387620BB0
	387620GW0
	387620BG0
	387620GB0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

back




Simple formality


Even if maths and angles were never your forte: You'll still love these four stunning geometric shapes. BOX, DOCUS, HEXO, and RAY are hard to beat when it comes to elegance and flexibility. And it means they are suitable for almost any room situation. It doesn't matter whether you let them glitter from the ceiling or shine from the walls. As these simple, narrow luminaires do not just come in a great variety of colours, they are also available in many different finishes; including for outdoors. So, right from the entrance to your house, friends and family will experience that "wow" effect. Who would have thought that geometry could be so illuminating?




weverducre.com/universalstars



BOX



DOCUS



HEXO



RAY

Auch wenn Mathematik nicht Ihr Lieblingsfach war: Diese vier atemberaubenden geometrischen Formen werden Sie lieben. BOX, DOCUS, HEXO und RAY sind in puncto Eleganz und Flexibilität nämlich kaum zu übertreffen. Und deshalb für nahezu jede Raumsituation geeignet. Ganz egal, ob man sie von der Decke blinzeln oder von den Wänden strahlen lässt. Denn die schlichten, schmalen Leuchten sind nicht nur in verschiedenen tollen Farbtönen, sondern auch in vielen verschiedenen Ausführungen erhältlich. Auch für den Außenbereich. So kann man lieben Freunden und Verwandten schon im Eingangsbereich ein staunendes „Wow“ entlocken. Wer hätte gedacht, dass Geometrie so spannend sein kann?







BOX mini

Wall surface



165



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.24kg

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.44kg

	CODE
	300120W0
	300120L0
	300120G0
	300120M0
	300120P0
	300120B0

	CODE
	301120W0
	301120L0
	301120G0
	301120M0
	301120P0
	301120B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

OPTIONAL




PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



BOX

Wall surface



1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|55K 0.60kg

	CODE
	341168W_
	341168L_
	341168G_
	341168M_
	341168Q_
	341168P_
	341168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5
1800-2850K	330 >90	9

2.0 LED

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|55K 0.67kg

	CODE
	341148W_
	341148L_
	341148G_
	341148M_
	341148Q_
	341148P_
	341148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5
1800-2850K	2x410 >90	9

1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20 0.66kg

	CODE
	3211G0W0
	3211G0L0
	3211G0G0
	3211G0M0
	3211G0Q0
	3211G0P0
	3211G0B0

OPTIONAL

flaps for adjustable beam angle

	CODE
	900401W0

QT14 3W | G9 | phase-cut dim | clear

	CODE
2700K 300lm	9010G802
3000K 280lm	9010G804



169



311



695




733



BOX

Wall surface



169



311




536



695



733



4.0 LED


LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|55K 0.86kg

	CODE
	341248W_
	341248L_
	341248G_
	341248M_
	341248Q_
	341248P_
	341248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5
1800-2850K	2x310	>90	9







RESTAURANT HABEL | 6-VORNE BERLIN | GERMANY

DOCUS mini

Wall surface



173



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.24kg

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.43kg

CODE	
	300320W0
	300320L0
	300320G0
	300320P0
	300320B0

CODE	
	301320W0
	301320L0
	301320G0
	301320P0
	301320B0

OPTIONAL


PAR16 6.5W | GU10 | phase-cut dim

CODE		
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE		
	2700K 460lm	901228W3
	2700K 437lm	901228B3
	3000K 500lm	901228W5
	3000K 457lm	901228B5




back




HEXO mini

Wall surface



179



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.23kg

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.40kg

	CODE
	300420G0
	300420Q0
	300420P0
	300420B0

	CODE
	301420G0
	301420Q0
	301420P0
	301420B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
	2700K 460lm 901228W3
	2700K 437lm 901228B3
	3000K 500lm 901228W5
	3000K 457lm 901228B5





RAY mini

Wall surface



187



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.21kg

	CODE
	300220W0
	300220L0
	300220G0
	300220M0
	300220P0
	300220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5

2.0

2x PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0.36kg

	CODE
	301220W0
	301220L0
	301220G0
	301220M0
	301220P0
	301220B0

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



back



DE BRINK VAN PARK BOSWIJK | STUDIO ID+ DOORN | THE NETHERLANDS

RAY

Wall surface

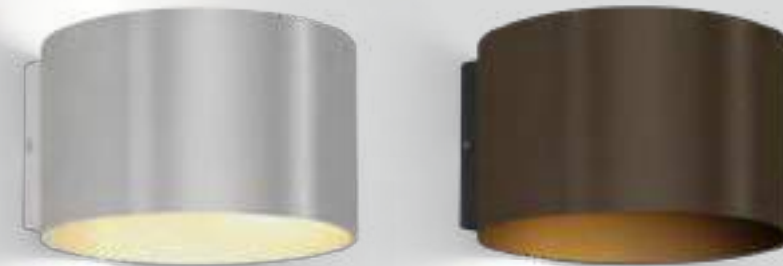

1.0 LED

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|55K 0.62kg

	CODE
	342168W_
	342168L_
	342168G_
	342168M_
	342168Q_
	342168P_
	342168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5
1800-2850K	330 >90	9



2.0 LED


LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|55K 0.69kg

	CODE
	342148W_
	342148L_
	342148G_
	342148M_
	342148Q_
	342148P_
	342148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5
1800-2850K	2x410 >90	9



1.0 QT14

QT14 max. 75W | G9
220-240VAC | 50-60Hz
aluminium

IP20 0.62kg

	CODE
	3221G0W0
	3221G0L0
	3221G0G0
	3221G0M0
	3221G0Q0
	3221G0P0
	3221G0B0




OPTIONAL

flaps for adjustable beam angle


	CODE
	900401W0

QT14 3W | G9 | phase-cut dim | clear
CODE


2700K 300lm	9010G802
3000K 280lm	9010G804



189



317 | 343 | 355




469



689



721




back



OFFICE MORGAN MCKINLEY | INTERIOR DESIGN VALMONT SYDNEY | AUSTRALIA

RAY

Wall surface



189



317 | 343 | 355



469



4.0 LED

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|55K 0.85kg



689

CODE


	342248W_
	342248L_
	342248G_
	342248M_
	342248Q_
	342248P_
	342248B_



721

incl. adjustable flaps




LIGHT COLOUR	LUMEN	CRI	CODE
2700K	2x325	>90	3
3000K	2x345	>90	5
1800-2850K	2x310	>90	9





TRAIN

Wall surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 36° SDCM3 L70|55K 0.24kg

2700K | CRI >90 | 520lm

	CODE
	306868W3
	306868G3
	306868B3

3000K | CRI >90 | 570lm

	CODE
	306868W5
	306868L5

2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 36° SDCM3 L70|55K 0.35kg

2700K | CRI >90 | 2x360lm

	CODE
	306968W3
	306968G3
	306968B3

3000K | CRI >90 | 2x375lm

	CODE
	306968W5
	306968L5



691



723





back



PRIVATE RESIDENCE | MARTIJN ENSINK | MAEN INTERIORS THE NETHERLANDS

CENTRAL

Wall surface



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80|60K 0.56kg




CODE	
	313574W_
	313574L_
	313574G_
	313574B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	580 >90	3
3000K	620 >90	5


2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80|60K 0.50kg

CODE	
	313674W_
	313674L_
	313674G_
	313674B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x315 >90	3
3000K	2x340 >90	5







OFFICE CEEBE | WEYGERS HASSELT | BELGIUM

LEENS

Wall surface



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80|60K 1.11kg

3000K | CRI >90 | 525lm

CODE

311174W5

311174L5

311174B5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80|60K 0.90kg


3000K | CRI >90 | 2x315lm

CODE

311274W5

311274L5

311274B5




back



BENTO

Wall surface




1.3

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80I60K 0.74kg

3000K | CRI >90 | 270lm

	CODE
	309274W5
	309274B5




3.6

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80I60K 1.48kg

3000K | CRI >90 | 270lm



	CODE
	309374W5
	309374B5

 back



DRO

Wall surface



1.0

QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

⊕ IP44 0.60kg

⌚ 69-71

CODE

3431G0W0

OPTIONAL

QT14 3W | G9 | phase-cut dim | clear
CODE
2700K | 300lm 9010G802
3000K | 280lm 9010G804

2.0

C35 max. 6W | E14
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
mirror thickness 3-6mm

⊕ IP44 1.05kg

⌚ 105-107

CODE

3432C0W0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal
CODE
2700K | 450lm 9003C103



263

341

413



647 | 661



PRIVATE RESIDENCE | MAADSTUDIO MAREK SVOBODA CZECH REPUBLIC

DARF

Wall surface

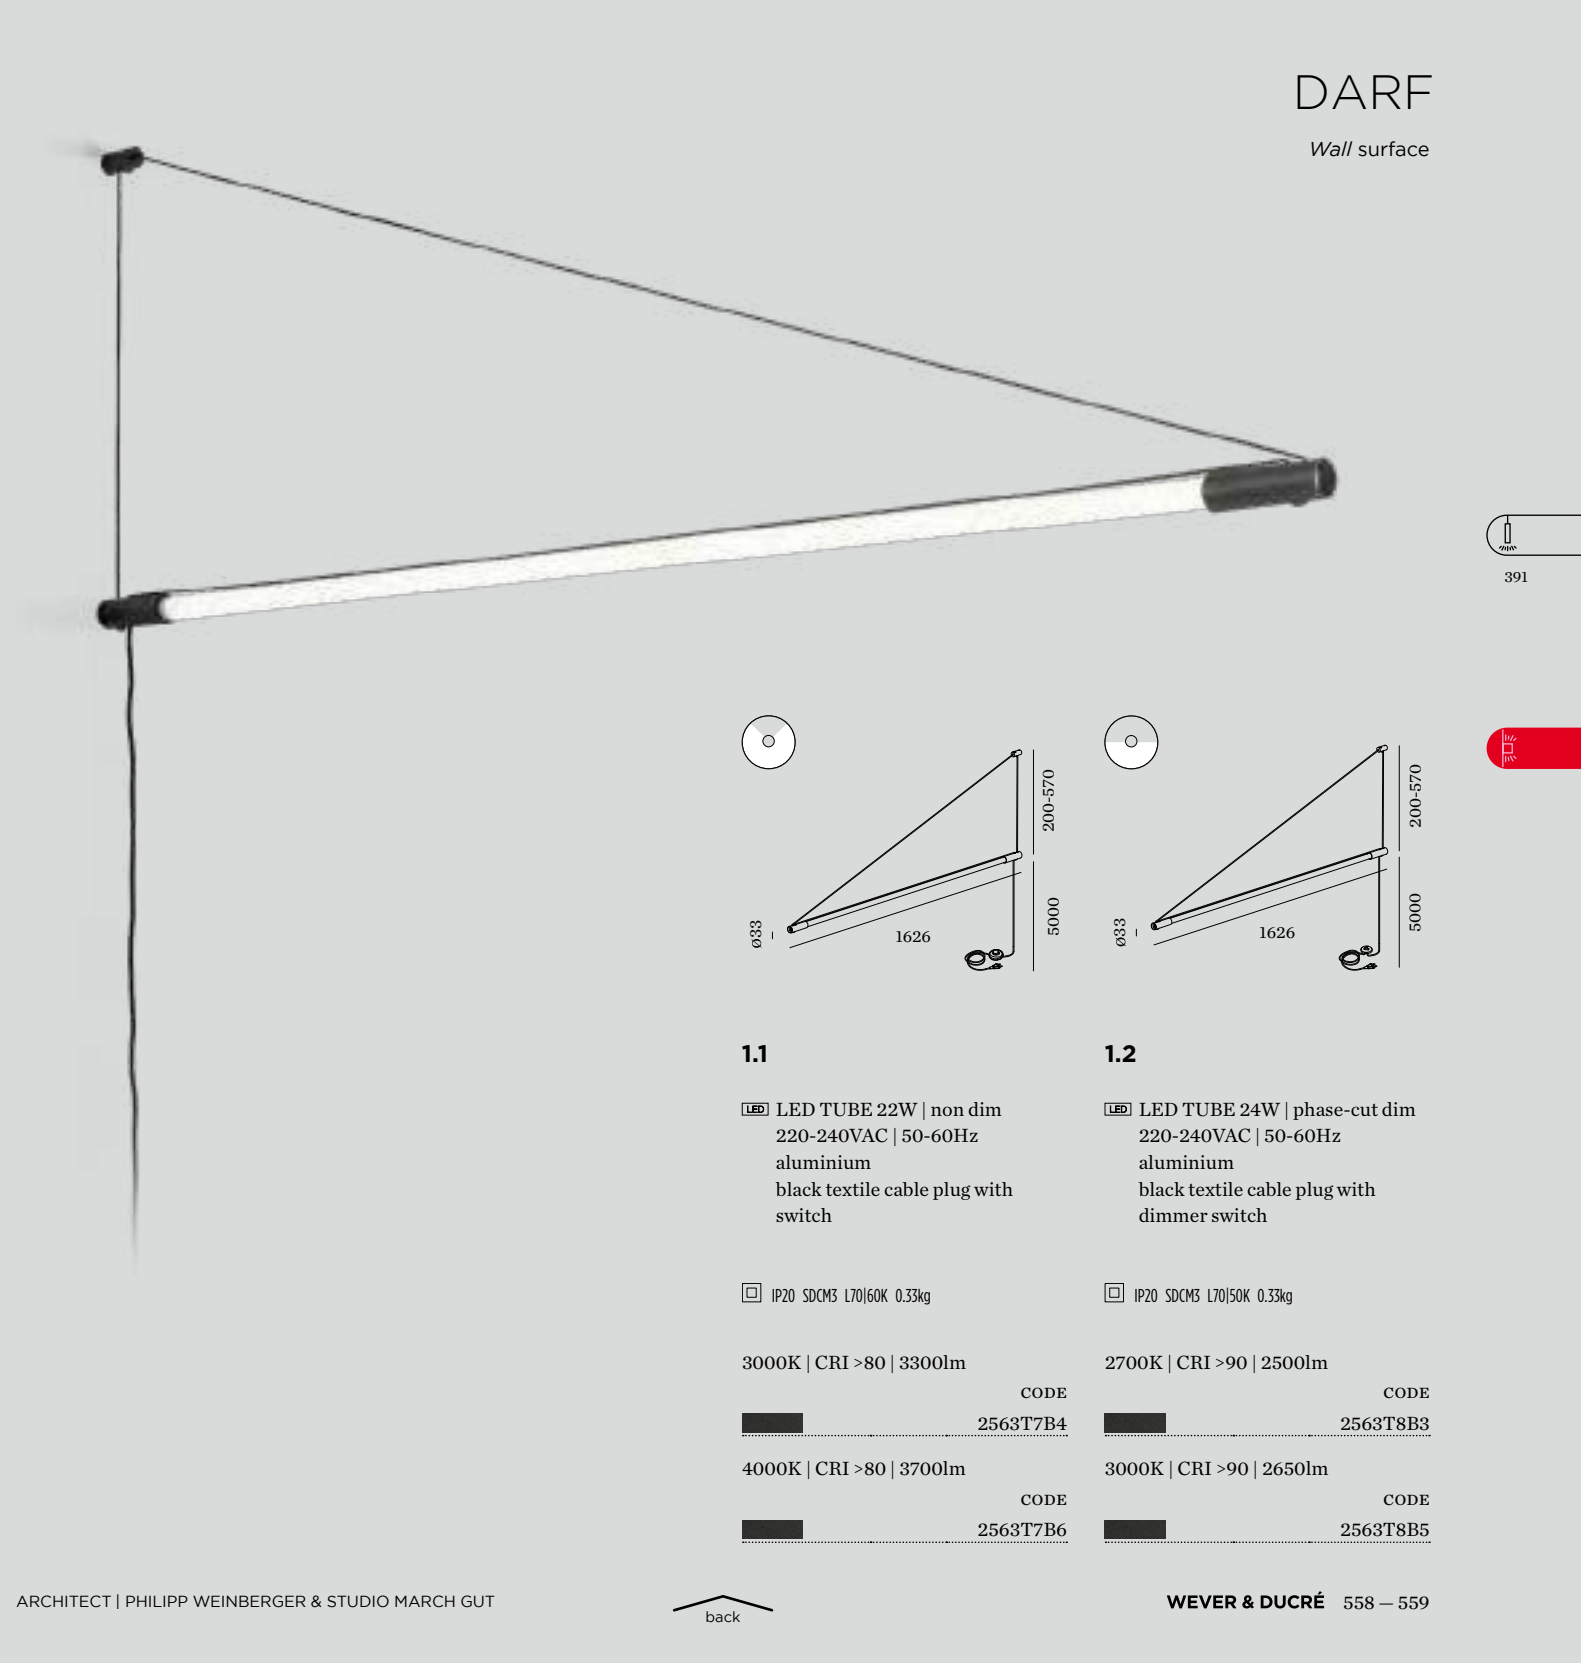

1.1

LED TUBE 22W | non dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with
switch

IP20 SDCM3 L70|60K 0.33kg

3000K | CRI >80 | 3300lm


CODE

2563T7B4

4000K | CRI >80 | 3700lm

CODE

2563T7B6



1.2

LED TUBE 24W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
black textile cable plug with
dimmer switch

IP20 SDCM3 L70|50K 0.33kg

2700K | CRI >90 | 2500lm

CODE

2563T8B3

3000K | CRI >90 | 2650lm

CODE

2563T8B5




ROOMOR

Wall surface



reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium

IP20 0°-45° 0.99kg

CODE

338120BK1

338120BB1

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE

2700K | 437lm 901228B3

3000K | 457lm 901228B5




ROOMOR

Wall surface



reddot award 2019
winner lighting design



3.1


PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch

IP20 0°-45°|0°-30° 1.36kg

CODE	
	339120BK1
	339120BB1

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	
CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5



3.1


PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

IP20 0°-45°|0°-30° 1.29kg

CODE	
	339220BK1
	339220BB1

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	
CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5









ROOMOR

Wall surface



reddot award 2019
winner lighting design

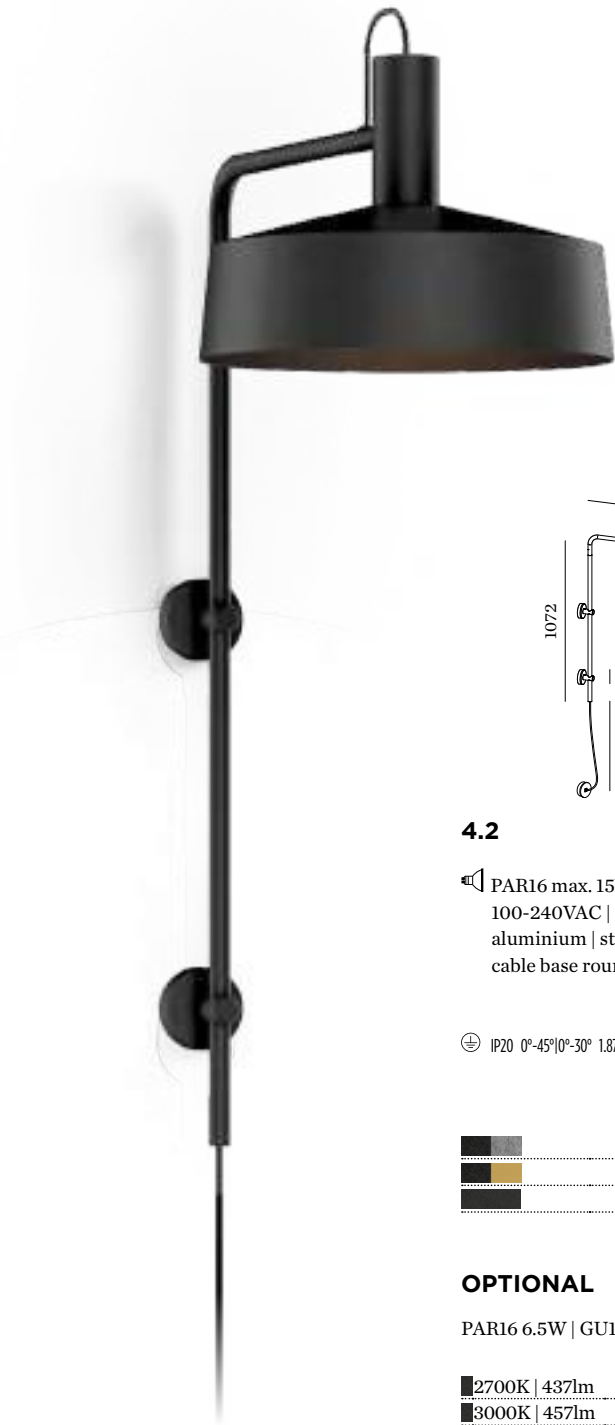

4.2


PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

⊕ IP20 0°-45°|0°-30° 1.87kg|1.70kg

CODE	
	339620BF2
	339620BK2
	339620BB2

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	
CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5



4.3


PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable base round

⊕ IP20 0°-45°|0°-30° 2.37kg|2.24kg

CODE	
	339620BF3
	339620BK3
	339620BB3

OPTIONAL

PAR16 6.5W GU10 phase-cut dim	
CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5



4.4

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable base round

⊕ IP20 0°-45°|0°-30° 2.48kg

CODE	
	339620BK4
	339620BB4


OPTIONAL

PAR16 6.5W GU10 phase-cut dim	
CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5



WIRO

Wall surface



1.0 CONE

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel


⊕ IP20 1.50kg

	CODE
	3341E0V0
	3341E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



1.0 CONE PLUG

T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
cable plug with dimmer switch


⊕ IP20 1.65kg

	CODE
	3343E0V0
	3343E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted



	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



1.8 WIRO

T30 max. 25W | E27
220-240VAC | 50-60Hz
aluminium | steel


⊕ IP20 1.60kg

	CODE
	3345E0V0
	3345E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted



	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



1.8 WIRO PLUG

T30 max. 25W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
cable plug with dimmer switch

⊕ IP20 1.75kg

	CODE
	3346E0V0
	3346E0B0

OPTIONAL

T30-225 5.3W | E27 | phase-cut dim
gold tinted

	CODE
2200K 382lm	9003E129
2700K 425lm	9003E136



265



417





CLEA


Wall surface



271




483



1.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown


IP20 SDCM2 L80|50K 0.78kg



2.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 SDCM2 L80|50K 1.31kg



3.0

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
white opal glass hand blown

IP20 SDCM2 L80|50K 2.09kg

	CODE
	181484W_
	181484LS_
	181484SG_
	181484FJ_
	181484B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	655 >90	5

	CODE
	181584W_
	181584LS_
	181584SG_
	181584FJ_
	181584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	655 >90	5

	CODE
	181684W_
	181684LS_
	181684SG_
	181684FJ_
	181684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	610 >90	3
3000K	655 >90	5





back



MERCURE CHANTILLY | PROJECT MANAGED BY ATYPIO HOTELS RESORTS WITH ABP ARCHITECTS | L'OBSERVATOIRE DE LA NUIT
VINEUIL-SAINT-FIRMIN | FRANCE

J.J.W.

Wall surface

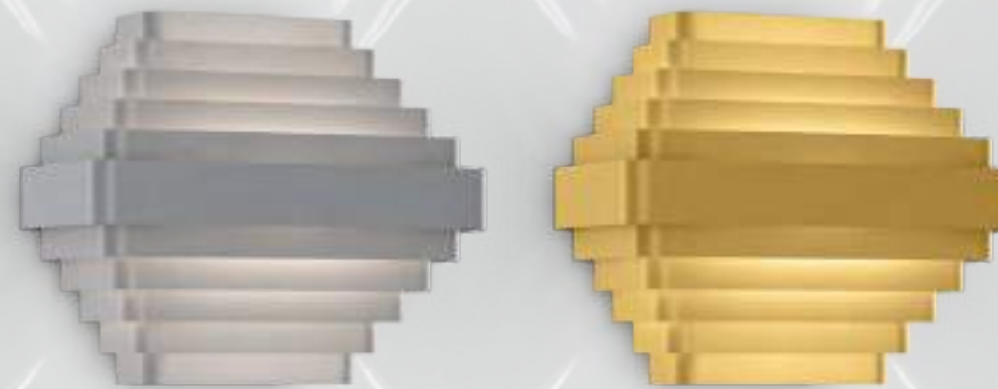

01

2x A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

IP20 2.92kg

CODE

2054E0S0

2054E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim
clear

CODE

2200K | 247lm

9003E109

2700K | 483lm

9003E138






HAIRDRESSER TON SUR TON | SIMON DE BACKERE KORTRIJK | BELGIUM

J.J.W.

Wall surface



02

⦿ A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium

⊕ IP20 1.02kg

CODE	
	2055E0S0
	2055E0Q0
	2055E0G0

OPTIONAL

A60 3.8W/5.6W | E27 | phase-cut dim
clear

CODE	
2200K 247lm	9003E109
2700K 483lm	9003E138







RESTAURANT TRIANGOLO | CONIX COOL INTERIOR EDEGEM | BELGIUM

MIRRO

Wall surface

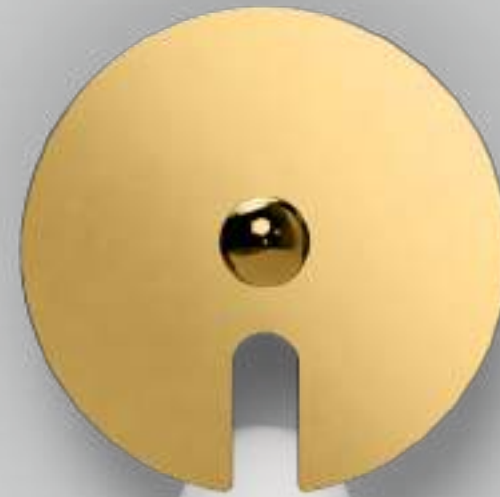

1.0

◀ A60 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

⊕ IP20 0.70kg

CODE	
	6321E0GB0
	6321E0NB0
	6321E0LB0


OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

CODE	
2700K 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

CODE	
2700K 409lm	9003E140



2.0

◀ G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

⊕ IP20 1.00kg

CODE	
	6322E0GB0
	6322E0NB0
	6322E0LB0


OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157



3.0

◀ G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | one side reflective
composite panel

⊕ IP20 2.10kg

CODE	
	6323E0GB0
	6323E0NB0
	6323E0LB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157




267



431



651 | 663





HOTEL PARK | MICHAL STAŠKO PIESTANY | SLOVAKIA



► DESIGN WITH LOVE



MIRRO SOFT

Wall surface

2.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material

⊕ IP20 0.67kg

CODE	
	6322E0MF0
	6322E0LF0
	6322E0IF0
	6322E0AF0

OPTIONAL
G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
clear

CODE	
2700K 483lm	9003E160

3.0

G95 max. 15W | E27
220-240VAC | 50-60Hz
aluminium | PET felt material

⊕ IP20 1.20kg

CODE	
	6323E0MF0
	6323E0LF0
	6323E0IF0
	6323E0AF0

OPTIONAL
G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

CODE	
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

CODE	
2700K 464lm	9003E157

G95 5.6W | E27 | phase-cut dim
clear

CODE	
2700K 483lm	9003E160

13&9 DESIGN

back

WEVER & DUCRÉ 584 — 585



DOT



Wall surface



As awarded by The Chicago Athenaeum: Museum of Architecture and Design




Delta Selection ADI Awards 2022



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover


IP20 SDCM2 L80|55K 0.40kg



3.0

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 SDCM2 L80|55K 0.56kg



4.0

LED COB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PC cover

IP20 SDCM2 L80|55K 0.73kg

CODE
330164W_
330164M_
330164Q_
330164B_


CODE
330264W_
330264M_
330264Q_
330264B_

CODE
330464W_
330464M_
330464Q_
330464B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	400 >90	3
3000K	420 >90	5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x400 >90	3
3000K	2x420 >90	5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3x400 >90	3
3000K	3x420 >90	5








TAPIS





Wall surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium


IP20 SDCM3 L80/50K 1.80kg

CODE	
	336174FJ_
	336174GW_
	336174ST_
	336174RA_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5





CREATE YOUR OWN TAPIS
weverducre.com/tapis-configurator





TAPIS

Wall surface

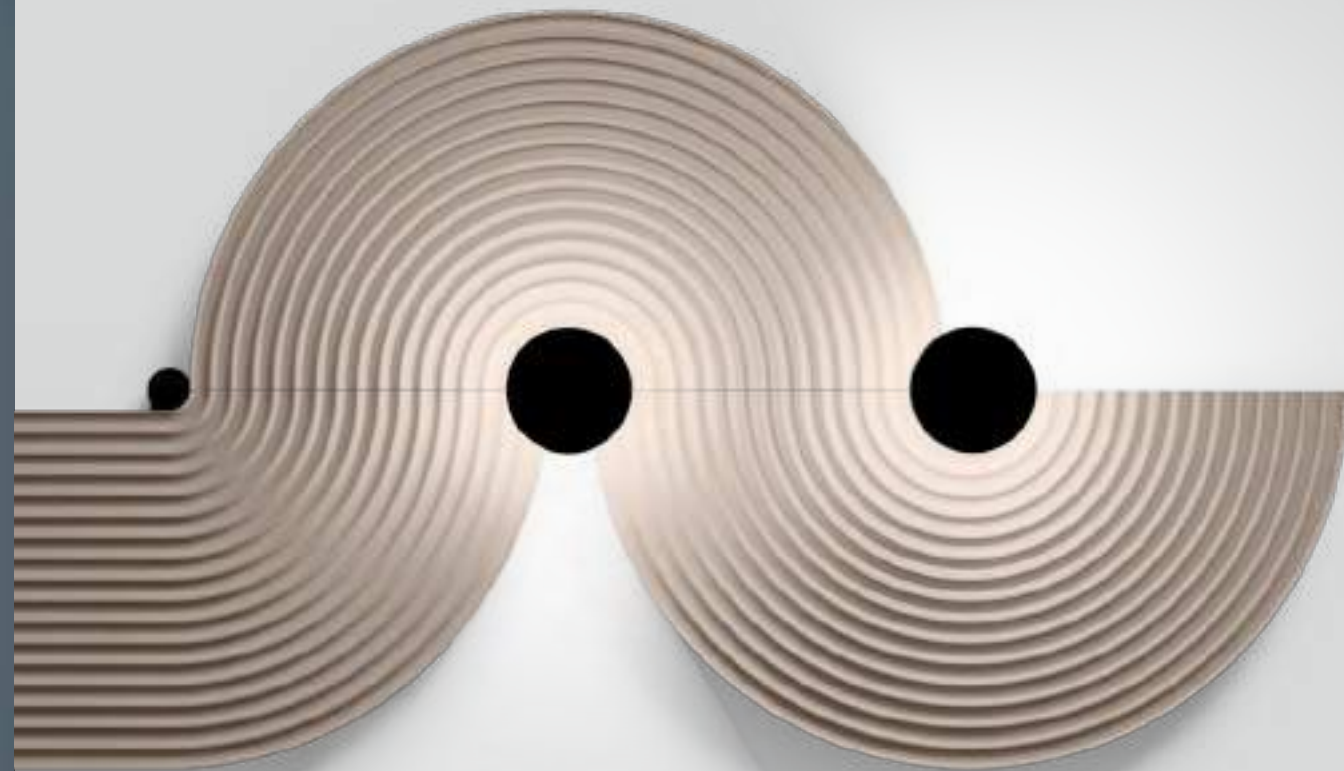


2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 SDCM3 L80|50K 1.95kg

CODE
336274FJ_
336274GW_
336274ST_
336274RA_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5




3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
composite | aluminium

IP20 SDCM3 L80|50K 1.70kg

CODE
336374FJ_
336374GW_
336374ST_
336374RA_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5




2.1

composite | aluminium

1.56kg

CODE
336200FJ0
336200GW0
336200ST0
336200RA0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5



3.1

composite | aluminium

1.31kg

CODE
336300FJ0
336300GW0
336300ST0
336300RA0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5

back





CREATE YOUR OWN TAPIS
weverducre.com/tapis-configurator



TAPIS SOFT


Wall surface

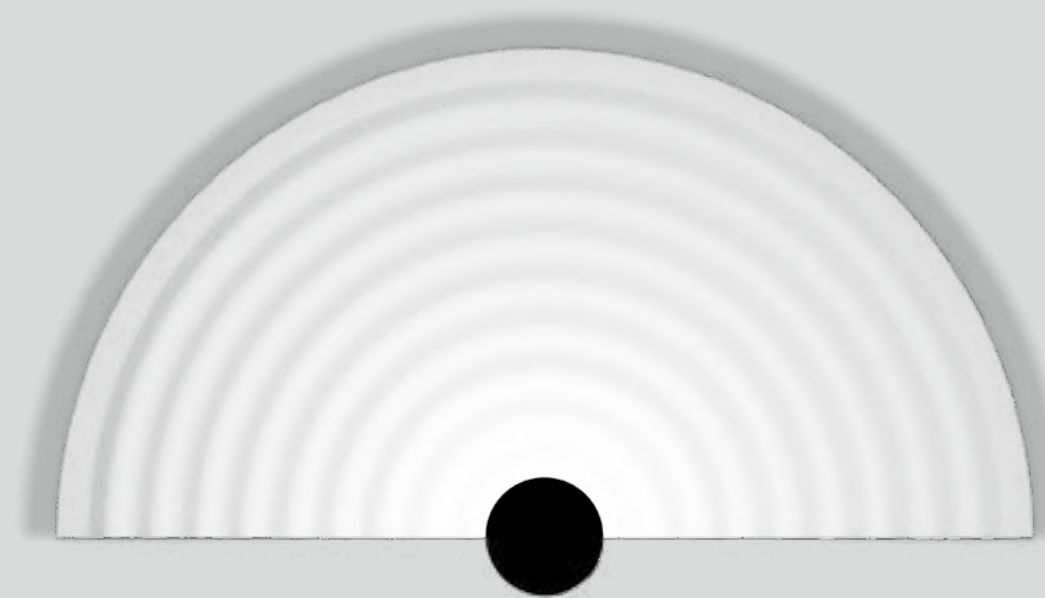

1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material


IP20 SDCM3 L80|50K 1.67kg



2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material

IP20 SDCM3 L80|50K 1.08kg



2.1

aluminium | PET felt material

0.88kg

CODE		
	336174WF_	
	336174MF_	
	336174LF_	
	336174OF_	

CODE		
	336274WF_	
	336274MF_	
	336274LF_	
	336274OF_	

CODE		
	336200WF0	
	336200MF0	
	336200LF0	
	336200OF0	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5





back



TAPIS SOFT

Wall surface

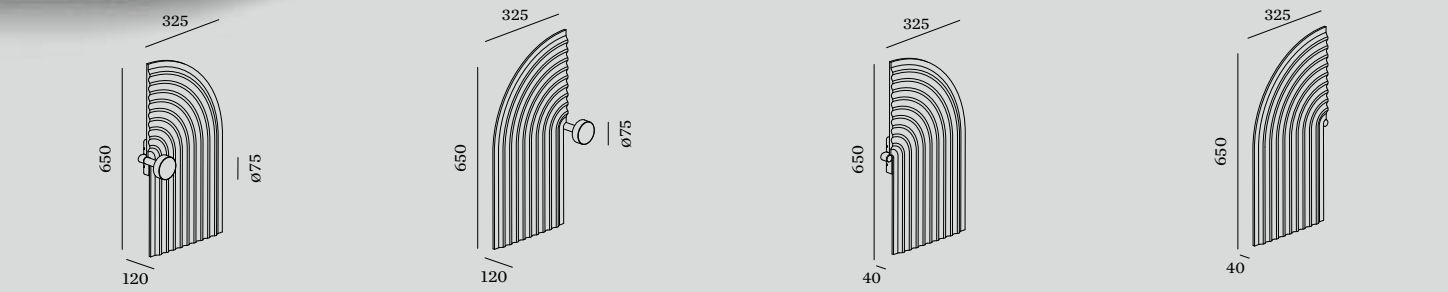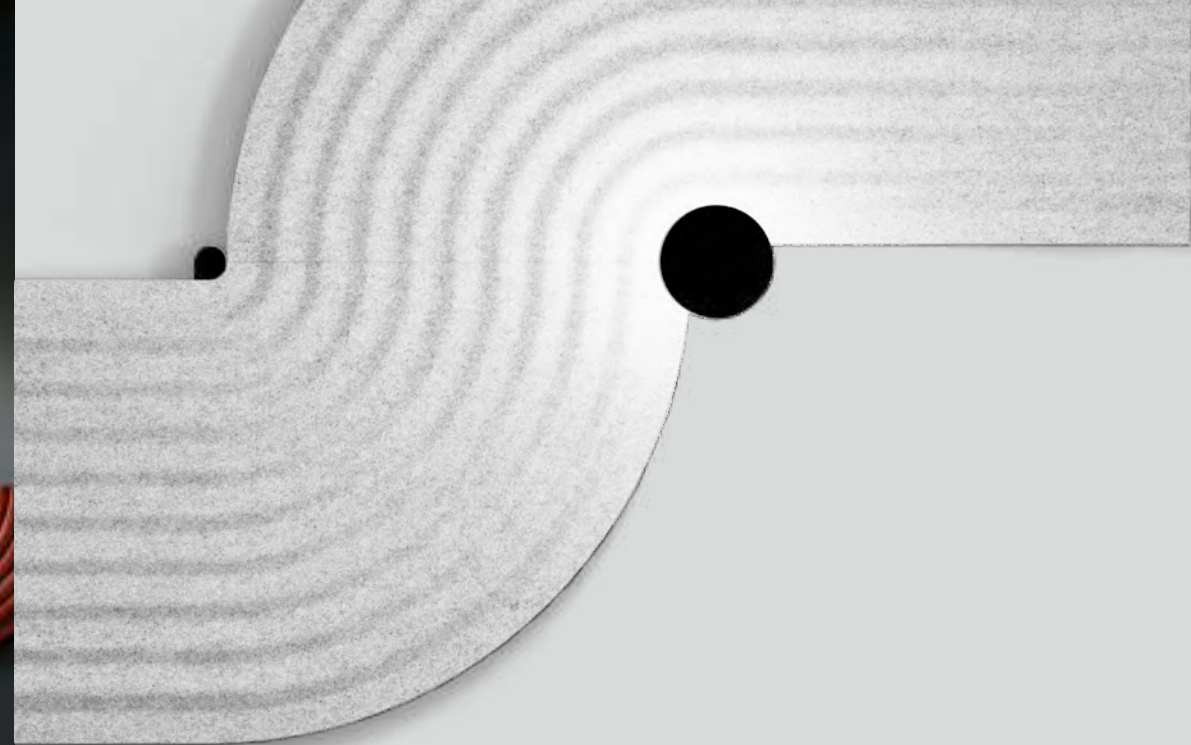

3.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material

IP20 SDCM3 L80/50K 1.14kg

CODE
336374WF_
336374MF_
336374LF_
336374OF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5

4.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | PET felt material

IP20 SDCM3 L80/50K 1.14kg

CODE
336474WF_
336474MF_
336474LF_
336474OF_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5

3.1

aluminium | PET felt material
0.94kg

CODE
336300WF0
336300MF0
336300LF0
336300OF0

LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5

4.1

aluminium | PET felt material
0.94kg

CODE
336400WF0
336400MF0
336400LF0
336400OF0




LIGHT COLOUR	LUMEN CRI	CODE
2700K	380 >90	3
3000K	390 >90	5

back



MILES

Wall surface

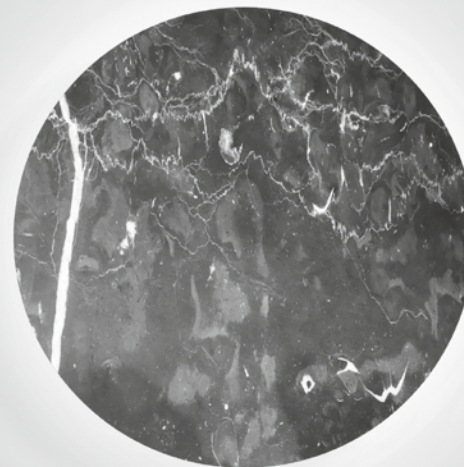

2.0 ROUND



LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 0.70kg | 1.24kg

3.0 ROUND

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 1.07kg | 1.92kg



	CODE
	317578W_
	317578G_
	317578M_
	317578Q_
	317578P_
	317578CC_
	317578B_
	317578MW_
	317578MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >90	3
3000K	620 >90	5

	CODE
	317778W_
	317778G_
	317778M_
	317778Q_
	317778P_
	317778CC_
	317778B_
	317778MW_
	317778MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >90	3
3000K	620 >90	5



ARGANA RESTAURANT | JOSE LARA INTERIORISMO MADRID | SPAIN







PRIVATE RESIDENCE | UP FOR GRABS INTERIORS UNITED KINGDOM

MILES

Wall surface



2.0 CARRÉ



LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 1.01kg | 2.11kg

3.0 CARRÉ

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 1.56kg | 3.39kg



	CODE
	317478W_
	317478G_
	317478M_
	317478Q_
	317478P_
	317478B_
	marble 317478MW_
	marble 317478MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >90	3
3000K	620 >90	5


	CODE
	317678W_
	317678G_
	317678M_
	317678Q_
	317678P_
	317678B_
	marble 317678MW_
	marble 317678MB_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	600 >90	3
3000K	620 >90	5



MILES


Wall surface



9.0

LED LED PCB 31W | phase-cut dim
220-240VAC | 50-60Hz
aluminium


IP20 SDCM3 L80|60K 2.01kg



12.0

LED LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP20 SDCM3 L80|60K 2.60kg



CODE
317878W_
317878G_
317878B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1560 >90	3
3000K	1580 >90	5



CODE
317978W_
317978G_
317978B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2130 >90	3
3000K	2160 >90	5

back



PRIVATE RESIDENCE | VLADIMIR MITROVIĆ SERBIA



1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.15kg



OPTIONAL

spacer 10mm for overlapping

	CODE
	900195B0

specs on page 816

	CODE
	370584CH_
	370584K_
	370584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	380 >90	5

4.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.20kg

	CODE
	370884CH_
	370884B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	700 >90	3
3000K	760 >90	5

FINLIN

Wall surface



reddot winner 2023



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



277



385



657



FINLIN

Wall surface



reddot winner 2023




277



385



657

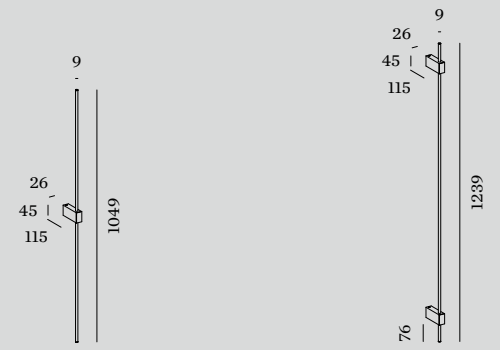

OPTIONAL

spacer 10mm for overlapping

CODE	LIGHT COLOUR	LUMEN CRI	CODE
900195B0	2700K	700 >90	3
	3000K	760 >90	5

specs on page 816

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.18kg

CODE
370684CH_
370684K_
370684B_

3.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.30kg

CODE
370784CH_
370784B_

CODE	LIGHT COLOUR	LUMEN CRI	CODE
370784CH_	2700K	700 >90	3
370784B_	3000K	760 >90	5




FINLIN

Wall surface




reddot winner 2023



1.0 ROUND

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser

IP20 SDCM3 L80|50K 0.32kg



OPTIONAL

spacer 10mm for overlapping

900196B0
specs on page 816

CODE	
	371184CH
	371184B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1180 >90	3
3000K	1280 >90	5


back




277



385



657

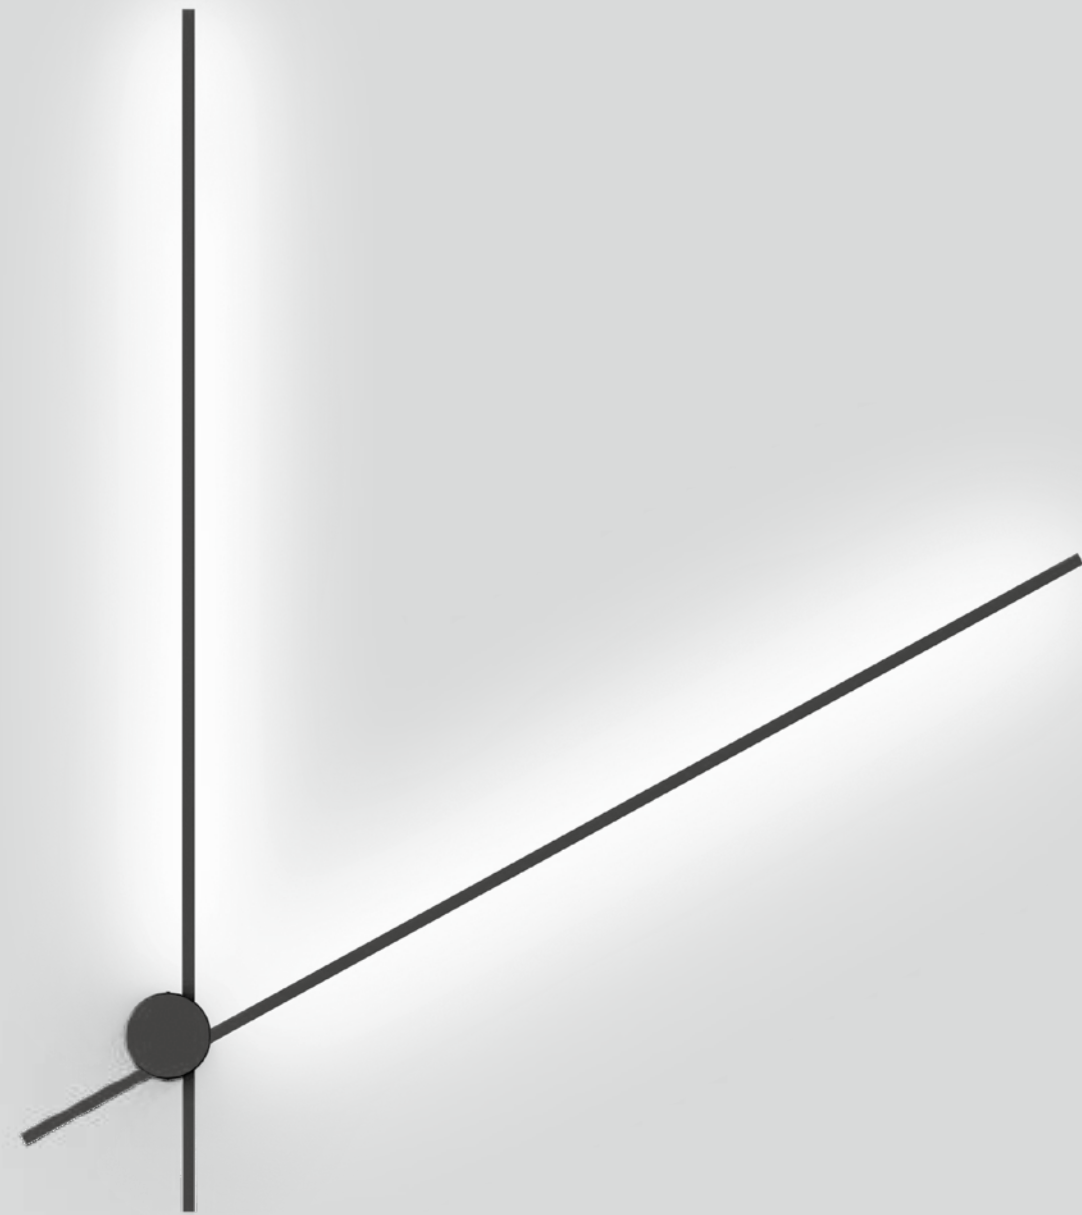

FIL SPIN

Wall surface


new



251



383



1.0



LED PCB 23W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | indir. light

IP20 180° SDCM2 L80|50K 1.00kg

2700K | CRI >90 | 2x1050lm

CODE

254584B3





SHOWROOM GRANDO KEUKENS SINT-MARTENS-LATEM | BELGIUM

VENN



Wall surface



As awarded by The Chicago Athenaeum: Museum of Architecture and Design




261

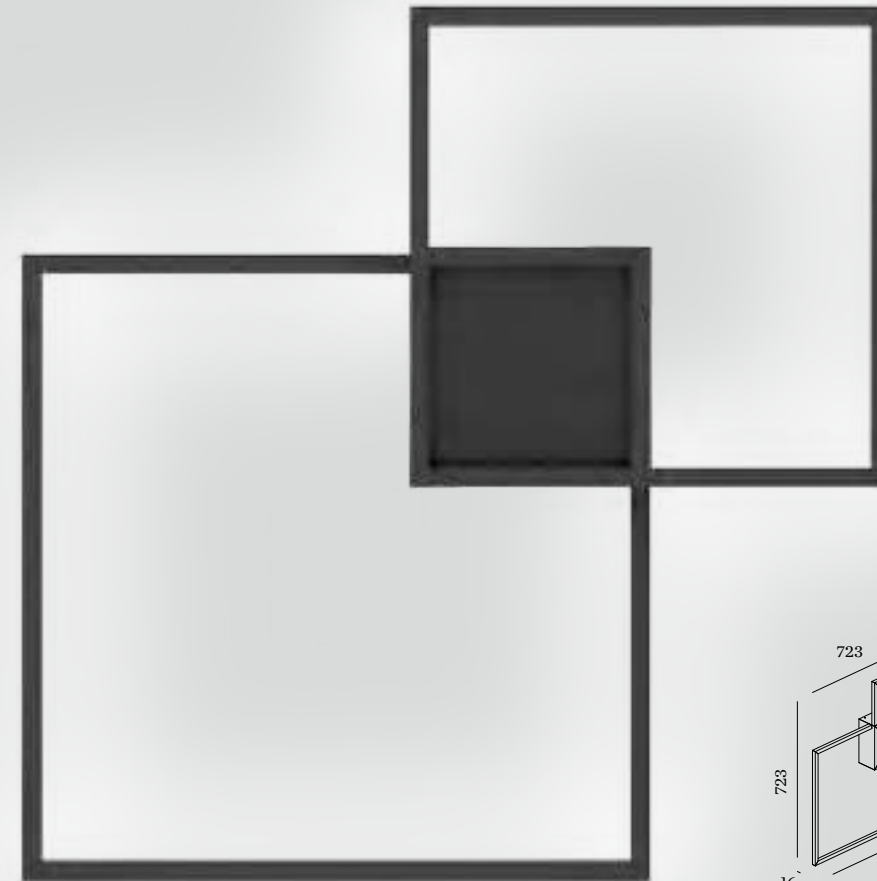

1.0

LED PCB 38W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover
indirect light

IP20 SDCM3 L70|55K 2.50kg



2.0

LED PCB 47W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA cover
dir./indir. light

IP20 SDCM3 L70|55K 2.50kg

	CODE
	149184W_
	149184Q_
	149184B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2950 >80	2
3000K	3140 >80	4

	CODE
	149284W_
	149284Q_
	149284B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	540/2950 >80	2
3000K	580/3140 >80	4



CREATE YOUR OWN VENN
weverducre.com/venn-configurator






► DESIGN WITH LOVE



SARA snooze

Wall surface



1.0

PAR16 max. 12W | GU10
100-240VAC | 50-60Hz
aluminium
incl. switch on/off

IP20 0°-90°/330° 0.33kg

	CODE
	157320W0
	157320G0
	157320K0
	157320B0

OPTIONAL

PAR16 6.5W | GU10

	CODE
2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5



PRIVATE RESIDENCE | UNIQUE RENOVATIONS KNOCKE BELGIUM



MATCH snooze


Wall surface



reddot winner 2023



As awarded by The Chicago Athenaeum:
Museum of Architecture and Design



1.0

LED LED COB 5W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off


⊕ IP20 0°-90°|350° ∠ 30° SDCM2 L80|50K 0.24kg

CODE

177353W_

177353B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	310 >90	3
3000K	330 >90	5





PRIVATE RESIDENCE | NORDIC STANDARD SPAIN



MICK snooze

Wall surface



reddot winner 2020
lighting design




DESIGN
AWARD
2021



237



309



1.0

LED LED COB 8W
220-240VAC | 50-60Hz | incl. driver
aluminium
incl. switch on/off

⊕ IP20 0°-90°|350° ⚡ 23° SDCM2 L80|50K 0.39kg

CODE	
	159643J_
	159643K_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	180 >90	3
3000K	200 >90	5



MICK

Wall surface






reddot winner 2020
lighting design



237



309

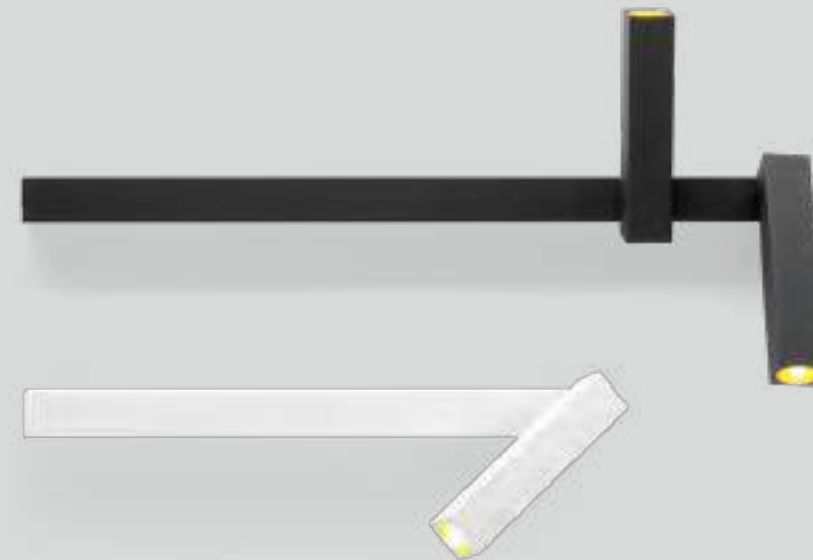

1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ∠23° SDCM2 L80|50K 0.35kg

2.0

LED COB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP20 0°-90°|350° ∠23° SDCM2 L80|50K 0.62kg



CODE		
	159344J_	
	159344K_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	225 >90	3
3000K	245 >90	5


CODE		
	159244J_	
	159244K_	

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x225 >90	3
3000K	2x245 >90	5



DOMINO

Wall surface



1.0


LED PCB 14W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP20 SDCM3 L80|60K 0.69kg

CODE

3371A4W_ (white)
3371A4B_ (black)


LIGHT COLOUR	LUMEN CRI	CODE
2700K	1060 >80	2
3000K	1175 >80	4





SCAVA

Wall surface




1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PC cover

IP20 SDCM2 L80|50K 0.42kg

	CODE
	350188W_
	350188GB_
	350188B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1880 >90	3
3000K	1960 >90	5









PERLEZ IP44

Wall surface


new



155



255 | 259 | 279



1.0


LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 SDCM3 L80|50K 0.38kg

50-52

CODE
192484W_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	540 >95	5
4000K	570 >95	7



2.0


LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 SDCM3 L80|50K 0.48kg

50-52

CODE
192584W_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	590 >95	5
4000K	620 >95	7



3.0


LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm

IP44 SDCM3 L80|50K 0.66kg

50-52

CODE
192684W_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	650 >95	5
4000K	680 >95	7





PERLEZ CLIP IP44

Wall surface



new



155



255 | 259 | 279




1.0 CLIP

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm
slides over the mirror

IP44 SDCM3 L80|50K 0.46kg

CODE
392484W_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	540 >95	5
4000K	570 >95	7




2.0 CLIP

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm
slides over the mirror

IP44 SDCM3 L80|50K 0.56kg

CODE
392584W_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	590 >95	5
4000K	620 >95	7




3.0 CLIP

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | opal glass
mirror thickness 3-6mm
slides over the mirror

IP44 SDCM3 L80|50K 0.74g

CODE
392684W_

LIGHT COLOUR	LUMEN CRI	CODE
3000K	650 >95	5
4000K	680 >95	7






RUVI IP44

Wall surface



131



3.0

3x G95 max. 12W | E27
220-240VAC | 50-60Hz
aluminium

IP44 1.48kg

CODE

3673EOLB0

OPTIONAL

G95 11.2W | E27 | phase-cut dim | opal
CODE

2700K | 1100lm 9003E154

G95 5.6W | E27 | phase-cut dim
filament | silver mirror


CODE

2700K | 464lm 9003E157

G95 5.6W | E27 | phase-cut dim
filament | gold mirror

CODE

2700K | 464lm 9003E142




back



MIRBA IP44


Wall surface



1.0

LED PCB 4/6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector


⊕ IP44 SDCM3 L80|50K 0.51kg



2.0

LED PCB 6/9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 SDCM3 L80|50K 0.65kg



3.0

LED PCB 8/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 SDCM3 L80|50K 0.69kg



CODE	
	328188W_
	328188BW_

LIGHT COLOUR	LUMEN CRI CODE
2700K	L 375/H 640 >90 3
3000K	L 400/H 670 >90 5

CODE	
	328288W_
	328288BW_

LIGHT COLOUR	LUMEN CRI CODE
2700K	L 530/H 920 >90 3
3000K	L 570/H 960 >90 5

CODE	
	328388W_
	328388BW_


LIGHT COLOUR	LUMEN CRI CODE
2700K	L 730/H 1290 >90 3
3000K	L 770/H 1350 >90 5

back






MIRBI long IP44

Wall surface



157

283



1.0

LED PCB 5/7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 SDCM3 L80|60K 0.72kg

2.0

LED PCB 7/12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 SDCM3 L80|60K 1.53kg

3.0

LED PCB 12/18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA
output selector

⊕ IP44 SDCM3 L80|60K 2.42kg



		CODE
		329188W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	250/410 >90	3
3000K	280/460 >90	5

		CODE
		329288W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	320/550 >90	3
3000K	365/620 >90	5

		CODE
		329388W_
LIGHT COLOUR	LUMEN CRI	CODE
2700K	550/750 >90	3
3000K	610/840 >90	5

back

PORTABLE LUMINAIRES



REVER DINING
655

TABLE



DRO
647



DRO
649



MIRRO
651



ROOMOR
653

FLOOR



new
FINLIN
657



new
MATCH
659



DRO
647



DRO
661



MIRRO
663









ROOMOR
665



DRO

Table / Floor



1.0


QT14 max. 5W | G9
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with switch

IP20 0.41kg

CODE
6421G0WB0

OPTIONAL

QT14 3W | G9 | phase-cut dim | clear
CODE
2700K | 300lm 9010G802
3000K | 280lm 9010G804



2.0


C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 0.97kg

CODE
6422C0WB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim
opal
CODE
2700K | 450lm 9003C103



3.0


A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium
artisanal Italian hand blown glass
cable plug with dimmer switch

IP20 1.97kg

CODE
6423E0WB0

OPTIONAL

A60 9W | E27 | phase-cut dim
opal
CODE
2700K | 800lm 9003E152





DRO

Table



263




341



413




557



2.0

⦿ C35 max. 6W | E14 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

☐ IP20 2.70kg



3.0

⦿ A60 max. 12W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel
artisanal Italian hand blown glass
cable plug with dimmer switch

☐ IP20 3.80kg

CODE

6432COWB0

CODE

6433EOWB0

OPTIONAL

C35 5.5W | E14 | phase-cut dim | opal
CODE
2700K | 450lm 9003C103

OPTIONAL

A60 9W | E27 | phase-cut dim | opal
CODE
2700K | 800lm 9003E152



MIRRO

Table




267



431



581



1.0

A60 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side
reflective composite panel
cable plug with dimmer switch

IP20 1.30kg

	CODE
	6301EOGBO
	6301EONBO
	6301EOLBO

OPTIONAL

A60 5.5W | E27 | phase-cut dim
gold mirror

	CODE
2700K 409lm	9003E139

A60 5.5W | E27 | phase-cut dim
silver mirror

	CODE
2700K 409lm	9003E140





HOTEL LOPESAN | EMILIO PELLEJERO FARO | SPAIN



3H DRAFT






back

ROOMOR

Table



reddot award 2019
winner lighting design



1.1

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel
cable plug with hand switch

IP20 0°-45° | 0°-30° 2.35kg

CODE

GG1	637120GG1
RR1	637120RR1
BK1	637120BK1
BB1	637120BB1

OPTIONAL

PAR16 6.5W | GU10

CODE

2700K 460lm	901228W3
2700K 437lm	901228B3
3000K 500lm	901228W5
3000K 457lm	901228B5




DET GLADE VANVID | SIMON SJØGAARD | ANKER & CO ODENSE | DENMARK

REVER DINING

Table



As awarded by The Chicago Athenaeum: Museum of Architecture and Design



ALWAYS USE



flat metal plate to add to REVER DINING with magnetic fixation suitable to put under the table cloth

plate colours

	CODE
	90019163
	90019164



single metal charging tray to add to REVER DINING with magnetic fixation

tray colours

	CODE
	90019175
	90019165
	90019166

1.0

LED 1.5W | touch dim
magnetic pole with optional base
rechargeable li-ion battery
incl. 1.5m USB charging cable
lights up to 8 hours
zink alloy | PMMA

IP23 SDCM3 L80I60K 0.80kg

lamp body

	CODE
	655186Q_
	655186B_

LIGHT COLOUR	LUMEN CRI	CODE
2200K	70 >80	1


lamp body

	CODE
	655186Q_
	655186W_
	655186B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	85 >80	2

OPTIONAL

multiple charging tray up to 4 fixtures	CODE
	90018007



MARCELLO ZILIANI








FINLIN

Floor

new



277



385



609




1.0

LED PCB 13W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium | opal PMMA diffuser
cable plug with dimmer switch

IP20 0°-10°/360° SDCM3 L80|50K 2.70kg

2700K | CRI >90 | 1380lm

	CODE
	470184W3
	470184B3



back








MATCH

Floor

new

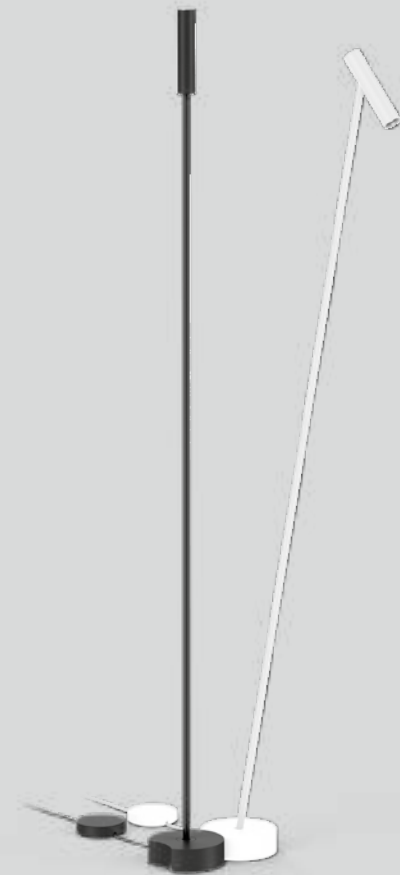


1.0

LED COB 18W | dimmable
220-240VAC | 50-60Hz | incl. driver
aluminium
cable plug with dimmer switch

IP20 0°-10°/360°/0°-145° A-30° SDCM3 L80/50K 2.70kg

2700K | CRI >90 | 560lm

	CODE
	477154W3
	477154B3



back



DRO

Floor



263




341



413



557



3.0

A60 max. 12W | E27 | dimmable
 220-240VAC | 50-60Hz
 aluminium | steel
 artisanal Italian hand blown glass
 cable plug with dimmer switch

IP20 8,25kg

CODE

6442E0WB0


OPTIONAL

A60 9W | E27 | phase-cut dim | opal
 CODE
 2700K | 800lm 9003E152



MIRRO


Floor



2.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side
reflective composite panel
cable plug with dimmer switch

IP20 3.30kg



3.0

G95 max. 15W | E27 | dimmable
220-240VAC | 50-60Hz
aluminium | steel | one side
reflective composite panel
cable plug with dimmer switch

IP20 3.70kg

	CODE
	6311EOGB0
	6311EONB0
	6311EOLB0

	CODE
	6312EOGB0
	6312EONB0
	6312EOLB0

OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K 464lm	9003E157


OPTIONAL

G95 5.1W/5.6W | E27 | phase-cut dim
gold mirror

	CODE
2200K 371lm	9003E156
2700K 464lm	9003E142

G95 5.6W | E27 | phase-cut dim
silver mirror

	CODE
2700K 464lm	9003E157

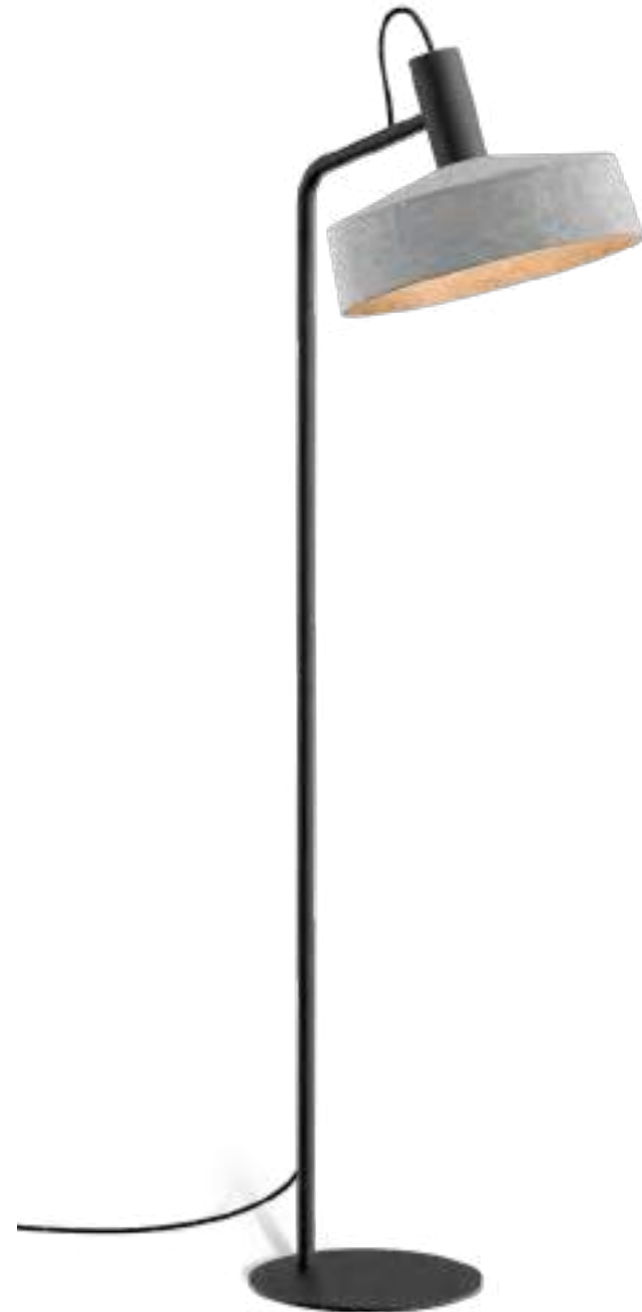


ROOMOR

Floor



reddot award 2019
winner lighting design



1.2

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch


⊕ IP20 0°-45°|0°-30° 6.05kg|5.90kg

CODE	
	638120BF2
	638120BK2
	638120BB2

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5



1.3

PAR16 max. 15W | GU10
100-240VAC | 50-60Hz
aluminium | steel | grey felt
cable with floor switch

⊕ IP20 0°-45°|0°-30° 6.54kg|6.39kg

CODE	
	638120BF3
	638120BK3
	638120BB3

OPTIONAL

PAR16 6.5W | GU10 | phase-cut dim

CODE	
	2700K 437lm 901228B3
	3000K 457lm 901228B5

Outdoor

In one of those late nights, we're glad to have outdoor lighting showing us the safe way home. But not only that: architectural details and even house numbers will become eye-catchers in the right LED light.

Ceiling recessed

669 – 679



RECESSED



DEEP BIJOU IP65
671



new
DEEP PETIT IP65
673



DEEP IP65
675



TAI0 IP65
677




INTRA
679



PRIVATE RESIDENCE GREECE



BLADE SPRING VERSIONS ONLINE
weverducre.com/more-deep-bijou-ip65



back

DEEP bijou IP65

Outdoor
 Ceiling recessed



137



1.0

LED COB 4W | 500mA | 8V
 aluminium

IP65 30° SDCM2 L80|55K 0.09kg

wire springs 50-52 1.85 4-25

	CODE
	165361W_
	165361Q_
	165361B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	470	>90	3
3000K	495	>90	5

ALWAYS USE


driver | IP67

	CODE
7W 500mA	90214301

more options and specs on page 808



PRIVATE RESIDENCE GREECE



DEEP petit IP65

Outdoor
Ceiling recessed

new

63 | 139



1.0

LED COB 6W | 350mA | 17V
aluminium

IP65 31° SDCM2 L80|50K 0.04kg

wire springs ⌀68-70 ∟L85 4-25

	CODE
	153761W_
	153761B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	590 >90	3
3000K	610 >90	5

ALWAYS USE

driver | 350mA | IP68

	CODE
17W	90213602

more options and specs on page 807




back



DEEP IP65

Outdoor
Ceiling recessed



65 | 151



1.0

LED COB 6/9W | 350/500mA | 17V
aluminium

IP65 33° SDCM2 L80|55K 0.24kg

wire springs 86-89 J.L.80 4-27

CODE

	184161W_
	184161B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	485/640 >90	3
3000K	510/690 >90	5

ALWAYS USE

driver | IP68

CODE



17W 350mA	90213602
24W 500mA	90214702

more options and specs on page 807



BLADE SPRING VERSIONS


weverducre.com/more-deep-ip65





TAIO IP65

Outdoor
Ceiling recessed



1.0

LED COB 6/9W | 350/500mA | 18V
aluminium
opal glass convex lens

IP65 | 105° SDCM2 L80/55K 0.13kg

wire springs 70 180 4-27

	CODE
	180781W_
	180781G_
	180781B_


LIGHT COLOUR	LUMEN	CRI	CODE
2700K	340/455	>90	3
3000K	370/495	>90	5

ALWAYS USE

driver | IP68

	CODE
17W 350mA	90213602
24W 500mA	90214702

more options and specs on page 807




back



PRIVATE RESIDENCE | KILLIAN GARTNER | ROOMS ATELIER AUSTRIA

INTRA

Outdoor
Ceiling recessed



1.0 OPAL

LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
opal PMMA cover

IP65 SDCM2 L70|60K 0.15kg

blade springs \varnothing 76-79 \downarrow 70 \varnothing min. 8

3000K | CRI >90 | 410lm

CODE	
	733188W5
	733188A5
	733188B5

2.0 SPOT


LED PCB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | polyamide
clear lens

IP65 Δ 45° SDCM3 L70|50K 0.15kg

blade springs \varnothing 76-79 \downarrow 70 \varnothing min. 8

3000K | CRI >90 | 560lm

CODE	
	733268W5
	733268A5
	733268B5



back

SPOT LIGHTS



TRAM
683



TUBE
685



TAIO
687



RAY
689



TRAIN
691



TUBE CARRÉ
693



BOX
695

LUMINAIRES



BLAS 1.0
697



BLAS 2.0
697



ROB
699



PRIVATE RESIDENCE BELGIUM



TRAM

Outdoor
Ceiling surface






1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 | 36° SDCM3 L70|55K 0.24kg

3000K | CRI >90 | 560lm

	CODE
	747768W5
	747768A5
	747768Q5
	747768B5

back






PRIVATE RESIDENCE AUSTRIA

TUBE

Outdoor
Ceiling surface




1.0 LED

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 Δ 36° SDCM3 L80|60K 0.56kg

3000K | CRI >90 | 630lm

CODE
734364W5
734364D5
734364A5
734364B5



1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65 0.49kg


CODE

734120W0
734120D0
734120A0
734120Q0
734120B0

OPTIONAL

PAR16 4.3W | GU10

CODE
2700K 350lm 905227S2
3000K 350lm 905227S4






PRIVATE RESIDENCE BELGIUM



TAIO

Outdoor
Ceiling surface



1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium
opal glass convex lens

IP65 | 105° SDCM2 L80|55K 0.53kg

CODE	
	180884W
	180884A
	180884Q
	180884B

LIGHT COLOUR	LUMEN CRI	CODE
2700K	450 >90	3
3000K	480 >90	5



SHOP PHILMODE | ERIC FRANSSENS BEAUFAYS | BELGIUM



RAY

Outdoor
Ceiling surface



189




317 | 343 | 355



469



545



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 21° SDCM3 L70|50K 0.63kg




OPTIONAL

inner cover

inner cover	CODE
	911041W1
	911041D1
	911041A1
	911041B1

cover	CODE
	735458W_
	735458D_
	735458A_
	735458B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	670 >90	3
3000K	700 >90	5
2000-3000K	470 >90	9




721



TRAIN

Outdoor
Ceiling surface



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 | 36° SDCM3 L70|55K 0.26kg

3000K | CRI >90 | 570lm

	CODE
	718668W5
	718668A5
	718668Q5
	718668B5



back



PRIVATE RESIDENCE | SPADO ARCHITECTS AUSTRIA

TUBE CARRÉ

Outdoor
Ceiling surface



1.0 LED

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 ⚡ 36° SDCM3 L80|60K 0.74kg

3000K | CRI >90 | 720lm

CODE
734464W5
734464D5
734464A5
734464B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

⊕ IP65 0.67kg

CODE

734220W0
734220D0
734220A0
734220Q0
734220B0

OPTIONAL


PAR16 4.3W | GU10

CODE
2700K 350lm 905227S2
3000K 350lm 905227S4





PRIVATE RESIDENCE FRANCE



OPTIONAL

inner reflector

	CODE
	911211W1
	911211D1
	911211Q1
	911211B1

inner cover

	CODE
	911011W1
	911011D1
	911011Q1
	911011B1


1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 21° SDCM3 L70|50K 0.67kg


	CODE
	735258W_
	735258D_
	735258A_
	735258Q_
	735258B_

LIGHT COLOUR	LUMEN	CRI	CODE
2700K	670	>90	3
3000K	700	>90	5
2000-3000K	470	>90	9



BOX

Outdoor
Ceiling surface




back



PRIVATE RESIDENCE | PETER RANEBURGER AUSTRIA

BLAS

Outdoor
Ceiling surface



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted
glass

⊕ IP65 SDCM3 L80/50K 1.00kg

3000K | CRI >90 | 950lm

CODE

736387W5

736387B5

2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | clear and frosted
glass


⊕ IP65 SDCM3 L80/50K 1.30kg

3000K | CRI >90 | 950lm


CODE

736487W5

736487B5



clear + frosted
glass



back







PRIVATE RESIDENCE BELGIUM

ROB

Outdoor
Ceiling surface




1.6

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 0.70kg

CODE
701188W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1170 >90	3
3000K	1220 >90	5




2.6

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.20kg

CODE
701288W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	1800 >90	3
3000K	1810 >90	5




3.5

LED PCB 32W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | opal PMMA cover

⊕ IP44 SDCM3 L80|60K 1.90kg

CODE
701388W_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	3340 >90	3
3000K	3360 >90	5



RECESSED



RETO 0.8
703



RETO 1.3
703



RETO 2.0
705



ORIS 0.7
707



ORIS 2.0
707



ORIS 0.8
709





ORIS 1.3
709



PRIVATE RESIDENCE GREECE

RETO

Outdoor
Wall recessed



0.8

LED PCB 3W | const. volt. | 24V
aluminium

IP65 SDCM3 L80|50K 0.24kg

66x66 40 min. 12

3000K | CRI >90 | 80lm

	CODE
	7451A2A5
	7451A2Q5
	7451A2B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 810

OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012047

concrete housing

	CODE
	90012046

1.3

LED PCB 5W | const. volt. | 24V
aluminium

IP65 SDCM3 L80|50K 0.42kg

115x117 40 min. 12

3000K | CRI >90 | 160lm

	CODE
	7452A2A5
	7452A2Q5
	7452A2B5

ALWAYS USE

driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903

specs on page 810



OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012041

concrete housing

	CODE
	90012040

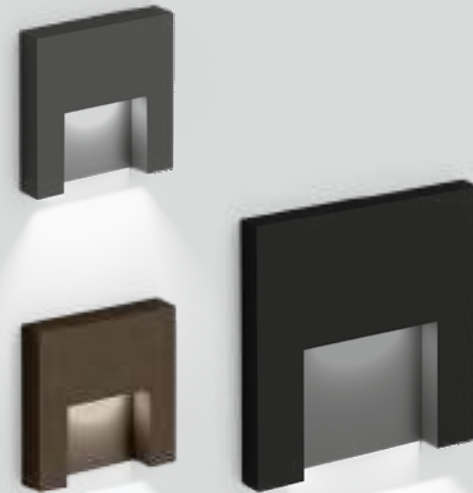




PRIVATE RESIDENCE AUSTRIA

RETO

Outdoor
Wall recessed



2.0

LED PCB 7W | const. volt. | 24V
aluminium

IP65 SDCM3 L80|50K 0.41kg

47x182 40 min. 12

3000K | CRI >90 | 330lm

	CODE
	7453A2A5
	7453A2Q5
	7453A2B5

ALWAYS USE


driver | IP67

	CODE
24V 35W	90212802
24V 100W	90212903


specs on page 810


OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing


	CODE
	90012044





ORIS

Outdoor
Wall recessed



0.7

LED PCB 2/5W | 350/700mA | 6V
aluminium

IP65 SDCM3 L70/60K 0.28kg

47x182 | 40° | min. 12

3000K | CRI >90 | 70/115lm

	CODE
	7091A1W5
	7091A1D5
	7091A1B5

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 807


OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012039

concrete housing

	CODE
	90012044



2.0

LED PCB 3/7W | 350/700mA | 9V
aluminium

IP65 SDCM3 L70/60K 0.42kg

115x185 | 40° | min. 12

3000K | CRI >90 | 140/220lm

	CODE
	7097A1W5
	7097A1D5
	7097A1B5

ALWAYS USE

driver | IP66

	CODE
3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 807


OPTIONAL

recessed housing incl. plasterkit

	CODE
	90012043

concrete housing



	CODE
	90012042

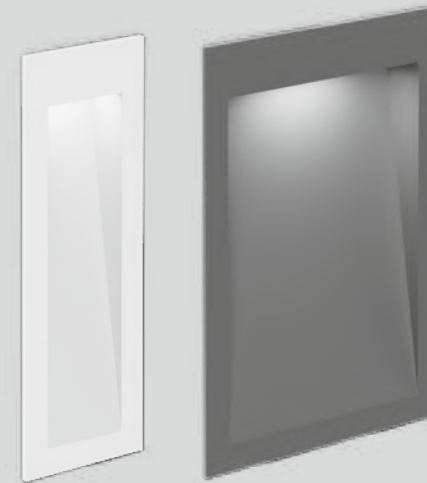



ORIS

Outdoor
Wall recessed



0.8

LED PCB 2/5W | 350/700mA | 6V aluminium

IP65 SDCM3 L70|60K 0.16kg

66x66 11.40 min. 12

3000K | CRI >90 | 90/140lm

CODE

White	7094A1W5
Grey	7094A1A5
Black	7094A1Q5
Dark Grey	7094A1B5

1.3

LED PCB 3/7W | 350/700mA | 9V aluminium

IP65 SDCM3 L70|60K 0.34kg

115x117 11.40 min. 12

3000K | CRI >90 | 140/220lm

CODE

White	7096A1W5
Grey	7096A1D5
Black	7096A1A5
Dark Grey	7096A1Q5
Dark Grey	7096A1B5

ALWAYS USE

driver | IP66

CODE

3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 807

OPTIONAL

recessed housing incl. plasterkit

CODE

White	90012047
-------	----------

concrete housing

CODE

White	90012046
-------	----------

ALWAYS USE

driver | IP66

CODE

3W 350mA	90213101
7W 500mA	90214301
7W 700mA	90215301

more options and specs on page 807

OPTIONAL

recessed housing incl. plasterkit


CODE

White	90012041
-------	----------

concrete housing

CODE

White	90012040
-------	----------

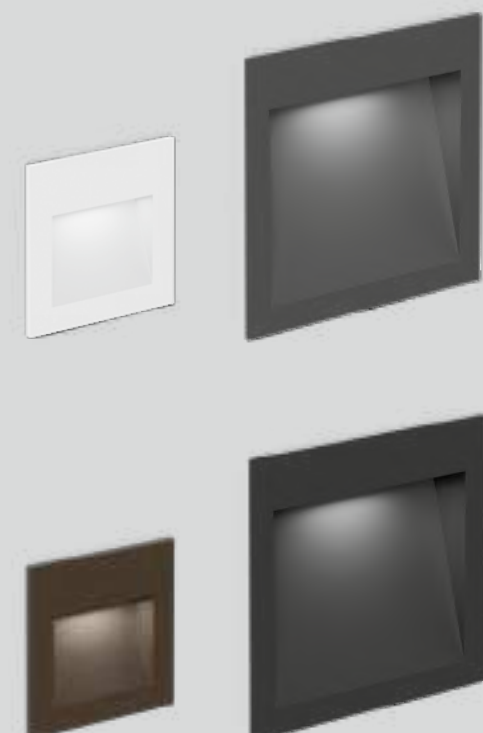

SPOT LIGHTS



TRAM
713



TUBE 1.0
715



TUBE 2.0
717



TAIO
719



RAY 1.0 | 2.0
721



RAY 3.0 | 4.0
721



TRAIN
723



KIOSK
725



CENTRAL
727



TUBE CARRÉ 1.0
729



TUBE CARRÉ 2.0
731



BOX 1.0 | 2.0
733



BOX 3.0 | 4.0
735



X-BEAM
737



X-BEAM ROUND
737

LUMINAIRES



RETO 1.3
739



RETO 2.0
739



PALOS 1.0
741



PALOS 2.0
741



PALOS 3.0
741



BLAS 1.0
743



BLAS 2.0
743



TAPE
745




SWAM
747



PRIVATE RESIDENCE AUSTRIA

TRAM

Outdoor
Wall surface




1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 36° SDCM3 L70I55K 0.25kg

3000K | CRI >90 | 560lm

	CODE
	747568W5
	747568A5
	747568Q5
	747568B5



2.0

LED COB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 36° SDCM3 L70I55K 0.30kg

3000K | CRI >90 | 2x360lm



	CODE
	747668W5
	747668A5
	747668Q5
	747668B5

back



TUBE

Outdoor
Wall surface



1.0 LED

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 | 36° SDCM3 L80|60K 0.53kg

3000K | CRI >90 | 630lm

	CODE
	711364W5
	711364D5
	711364A5
	711364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65 | 0.49kg

	CODE
	711120W0
	711120D0
	711120A0
	711120Q0
	711120B0

OPTIONAL



PAR16 4.3W | GU10

	CODE
	2700K 350lm 905227S2
	3000K 350lm 905227S4



TUBE

Outdoor
Wall surface



2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium




IP65 | 36° SDCM3 L80/60K 0.88kg

3000K | CRI >90 | 2x630lm

2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65 | 0.67kg



	CODE
	711464W5
	711464D5
	711464A5
	711464B5

	CODE
	711220W0
	711220D0
	711220A0
	711220Q0
	711220B0

OPTIONAL

PAR16 4.3W | GU10

	CODE
	905227S2
	905227S4




685





TAIO

Outdoor
Wall surface




1.0

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 | 105° SDCM2 L80|55K 0.49kg

CODE	
	180584W_
	180584A_
	180584Q_
	180584B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	430 >90	3
3000K	460 >90	5





2.0

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | protector glass
opal glass convex lens

IP65 | 105° SDCM2 L80|55K 0.85kg

CODE	
	180684W_
	180684A_
	180684Q_
	180684B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x430 >90	3
3000K	2x460 >90	5





RAY

Outdoor
Wall surface



317 | 343 | 355




469



545



689



1.0


LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|55K 0.47kg

	CODE
	749168W_
	749168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5



2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|55K 0.47kg

	CODE
	749148W_
	749148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5



3.0


LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|55K 0.53kg

	CODE
	749268W_
	749268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	260 >90	3
3000K	280 >90	5



4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|55K 0.53kg

	CODE
	749248W_
	749248B_


incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5



TRAIN

Outdoor
Wall surface



1.0 NARROW


LED PCB 6W
220-240VAC | 50-60Hz | incl. driver
aluminium
narrow up or narrow down lens

IP65 | 55°x5° SDCM3 L80|60K 0.24kg

3000K | CRI >80 | 170lm

CODE

718143B4



1.0

LED COB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 | 38° SDCM3 L70|55K 0.24kg


3000K | CRI >90 | 570lm

CODE

718868W5

718868A5

718868B5



2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 | 38° SDCM3 L70|55K 0.35kg

3000K | CRI >90 | 2x360lm

CODE

718968W5

718968A5

718968B5


back

WEVER & DUCRÉ 722 – 723



KIOSK

Outdoor
Wall surface



1.0

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 180|50K 0.50kg

	CODE
	707174W_
	707174A_
	707174Q_
	707174B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x450 >90	3
3000K	2x500 >90	5



775





back



CENTRAL

Outdoor
Wall surface



1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.58kg

3000K | CRI >90 | 620lm

	CODE
	313774W5
	313774A5
	313774Q5
	313774B5

2.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.52kg

3000K | CRI >90 | 2x340lm




	CODE
	313874W5
	313874A5
	313874Q5
	313874B5



PRIVATE RESIDENCE | TRANSFORM ARCHITECTUUR BELGIUM

TUBE CARRÉ

Outdoor
Wall surface

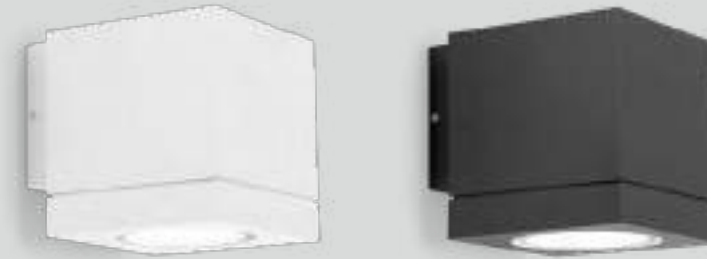

1.0 LED

LED LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 36° SDCM3 L80|60K 0.71kg

3000K | CRI >90 | 720lm

	CODE
	744364W5
	744364D5
	744364A5
	744364B5

1.0 PAR16

PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium


IP65 0.64kg

	CODE
	744120W0
	744120D0
	744120A0
	744120Q0
	744120B0

OPTIONAL

PAR16 4.3W | GU10



	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4





TUBE CARRÉ

Outdoor
Wall surface






2.0 LED

LED COB 20W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 | 36° SDCM3 L80|60K 1.13kg

3000K | CRI >90 | 2x720lm



2.0 PAR16

2x PAR16 max. 5W | GU10
100-240VAC | 50-60Hz
aluminium

IP65 | 0.94kg

CODE	CODE
744464W5	744220W0
744464D5	744220D0
744464A5	744220A0
744464B5	744220Q0
	744220B0

OPTIONAL



PAR16 4.3W | GU10

CODE	CODE
2700K 350lm	905227S2
3000K 350lm	905227S4



BOX





Outdoor
Wall surface



1.0

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|55K 0.60kg



	CODE
	748168W_
	748168D_
	748168A_
	748168Q_
	748168B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	350 >90	3
3000K	370 >90	5

2.0


LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|55K 0.62kg

	CODE
	748148W_
	748148D_
	748148A_
	748148Q_
	748148B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x440 >90	3
3000K	2x460 >90	5



169



311



535





695





BOX

Outdoor
Wall surface



3.0



LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80I55K 0.67kg

4.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80I55K 0.86kg



	CODE
	748268W_
	748268D_
	748268Q_
	748268B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	260 >90	3
3000K	280 >90	5

	CODE
	748248W_
	748248D_
	748248Q_
	748248B_

incl. adjustable flaps

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x325 >90	3
3000K	2x345 >90	5



169



311



535




695








SHOWROOM CHILLOUT AREA GRAZ | AUSTRIA



X-BEAM

Outdoor
Wall surface



OPTIONAL

snoot

1.0

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° 108° SDCM3 L80160K 1.22kg

3000K | CRI >80 | 1680lm

CODE	CODE
90019023	700374D4
	700374A4
	700374B4

snoot round

1.0 ROUND


LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° 108° SDCM3 L80160K 1.30kg

3000K | CRI >80 | 1680lm

CODE	CODE
90019031	700474A4
	700474Q4
	700474B4



specs on page 816





RETO

Outdoor
Wall surface

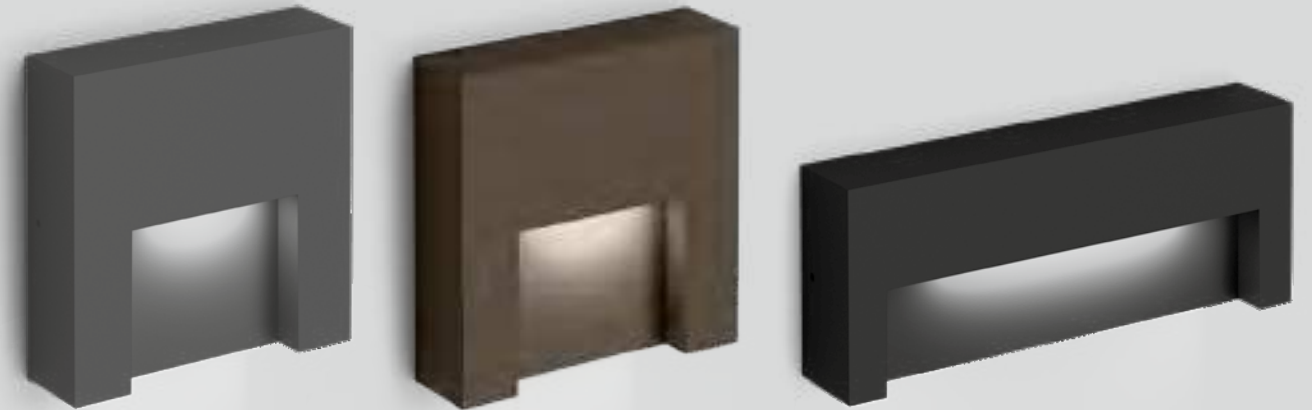


1.3

LED PCB 5W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|50K 0.62kg

3000K | CRI >90 | 140lm

	CODE
	7455A4A5
	7455A4Q5
	7455A4B5



2.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|50K 0.58kg


3000K | CRI >90 | 340lm

	CODE
	7456A4A5
	7456A4Q5
	7456A4B5



PALOS

Outdoor
Wall surface




1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.86kg

CODE	
	4161A4A_
	4161A4Q_
	4161A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4




2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 1.15kg

CODE	
	4162A4A_
	4162A4Q_
	4162A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4



3.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.75kg

CODE	
	4163A4A_
	4163A4Q_
	4163A4B_



LIGHT COLOUR	LUMEN CRI	CODE
2700K	710 >80	2
3000K	770 >80	4



PRIVATE RESIDENCE BELGIUM

BLAS

Outdoor
Wall surface



1.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass

IP65 SDCM3 L80|50K 1.00kg

3000K | CRI >90 | 950lm

	CODE
	736387W5
	736387B5


2.0

LED PCB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium
clear and frosted glass


IP65 SDCM3 L80|50K 1.30kg

3000K | CRI >90 | 950lm

	CODE
	736487W5
	736487B5



clear + frosted
glass



back



697






PRIVATE RESIDENCE AUSTRIA

TAPE

Outdoor
Wall surface




1.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80/60K 0.73kg

3000K | CRI >90 | 420lm



	CODE
	722174W5
	722174D5
	722174A5
	722174B5

back








PRIVATE RESIDENCE | ELLEMVIE - ART & INTERIEUR THE NETHERLANDS

SWAM

Outdoor
Wall surface

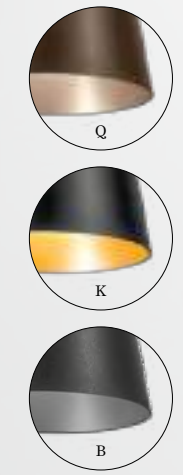

1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|60K 0.91kg

2700K | CRI >90 | 410lm

	CODE
	746278Q3
	746278K3
	746278B3

2.0

LED PCB 13W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80|60K 0.91kg

2700K | CRI >90 | 670lm

	CODE
	746378Q3
	746378K3
	746378B3

back

WEVER & DUCRÉ 746 – 747



777

RECESSED



CARD 0.1
751



CARD 0.2
751



BLINK
753



MAP
755



MAP ASYM
759



CHART
761




CHART ASYM
763



CARD

Outdoor
Floor recessed



0.1

LED PCB 1W | 350mA | 3V
aluminium | stainless steel | glass


IP67 IK07 Δ 16° SDCM3 L70|60K 0.05kg

22-24 L60

3000K | CRI >80 | 90lm

CODE

75014114



0.2

LED PCB 1W | 350mA | 3V
aluminium | stainless steel | glass

IP67 IK07 Δ 16° SDCM3 L70|60K 0.06kg

22-24 L60

3000K | CRI >80 | 90lm

CODE

75024114

ALWAYS USE

driver | IP66

CODE

3W | 350mA 90213101

more options and specs on page 807



ALWAYS USE

driver | IP66

CODE

3W | 350mA 90213101


more options and specs on page 807



PRIVATE RESIDENCE GREECE

BLINK

Outdoor
trimless | Floor recessed



1.0

LED COB 5W | 500mA | 9V
aluminium | glass

IP65 IK08 Δ 30° SDCM2 L80/S0K 0.34kg

47-49 \mathbb{I} L63

3000K | CRI >90 | 440lm

CODE

721161B5

1.0 TRIMLESS

LED COB 5W | 500mA | 9V
aluminium | glass

IP65 IK08 Δ 30° SDCM2 L80/S0K 0.32kg

3000K | CRI >90 | 440lm


CODE

721261B5

OPTIONAL

recessed ground housing | plastic

137 \mathbb{I} L110




132

ALWAYS USE

recessed ground housing | plastic

137 \mathbb{I} L110



132

ALWAYS USE

driver | 500mA

CODE

7W dim 90224301

7W IP67 90214301



more options and specs on page 808

CODE

90012201

CODE

90012201




back



MAP

Outdoor
Floor recessed



0.6


LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 Δ 43° SDCM3 L70|55K 0.38kg

\varnothing 38-40 \mathbb{H} 100

3000K | CRI >90 | 310lm

CODE
75116815



0.9

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 Δ 35° SDCM3 L70|55K 0.70kg

\varnothing 50-52 \mathbb{H} 135


3000K | CRI >90 | 660lm

CODE
75126815

OPTIONAL

recessed ground housing | plastic

\varnothing 137 \mathbb{H} 110




\varnothing 132

CODE
90012201

OPTIONAL

recessed ground housing | plastic

\varnothing 137 \mathbb{H} 130



\varnothing 132



CODE
90012202





MAP

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 Δ 44° SDCM3 L70|55K 1.01kg

72-74 1120

3000K | CRI >90 | 1010lm

CODE

75136815

1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 Δ 38° SDCM3 L70|55K 1.43kg

91-93 1185

3000K | CRI >90 | 1260lm


CODE

75146815

OPTIONAL

recessed ground housing | plastic

190 1158



185


CODE

90012203

OPTIONAL

recessed ground housing | plastic

220 1184



213

CODE

90012204




back



MAP ASYM

Outdoor
Floor recessed



1.2

LED COB 10W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector


IP67 IK08 SDCM3 L70|55K 1.06kg

72-74 160

3000K | CRI >90 | 720lm

CODE

7515A8I5



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM3 L70|55K 1.72kg

91-93 185

3000K | CRI >90 | 850lm


CODE

7516A8I5

OPTIONAL

recessed ground housing | plastic

190 158



185


CODE

90012203

OPTIONAL

recessed ground housing | plastic

220 184



213

CODE

90012204






PRIVATE RESIDENCE FRANCE



CHART

Outdoor
Floor recessed



0.6


LED COB 5W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 Δ 43° SDCM3 L70|55K 0.39kg

38-40 \mathbb{L} 118

3000K | CRI >90 | 310lm

CODE
752168I5



0.9


LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 Δ 35° SDCM3 L70|55K 0.70kg

50-52 \mathbb{L} 135

3000K | CRI >90 | 660lm

CODE
752268I5



1.2


LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK08 Δ 44° SDCM3 L70|55K 1.05kg

72-74 \mathbb{L} 175

3000K | CRI >90 | 1010lm

CODE
752368I5



1.6

LED COB 16W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass

IP67 IK09 Δ 38° SDCM3 L70|55K 1.45kg

91-93 \mathbb{L} 185


3000K | CRI >90 | 1260lm

CODE
752468I5

OPTIONAL

recessed ground housing | plastic

137 \mathbb{L} 110




CODE
90012201

OPTIONAL

recessed ground housing | plastic

137 \mathbb{L} 130




CODE
90012202

OPTIONAL

recessed ground housing | plastic

190 \mathbb{L} 158




CODE
90012203

OPTIONAL

recessed ground housing | plastic

220 \mathbb{L} 184




CODE
90012204

back



CHART ASYM

Outdoor
Floor recessed



1.2

LED COB 12W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector


IP67 IK08 SDCM3 L70|55K 1.10kg

72-74 160

3000K | CRI >90 | 560lm

CODE

7525A8I5



1.6

LED COB 15W | phase-cut dim
220-240VAC | 50-60Hz
aluminium | stainless steel | glass
asymmetric reflector

IP67 IK09 SDCM3 L70|55K 1.83kg

91-93 185

3000K | CRI >90 | 850lm


CODE

7526A8I5

OPTIONAL

recessed ground housing | plastic

190 158




CODE

90012203

OPTIONAL

recessed ground housing | plastic

220 184




CODE

90012204



back

PLUG & PLAY

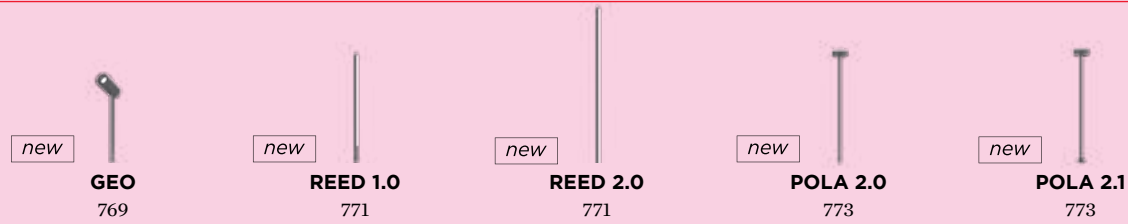

LUMINAIRES



PROJECTORS



BOLLARDS



PORTABLE LUMINAIRES




One driver is all you need

They accentuate the façade, put the garden into the right light, and ensure that paths remain clearly visible even in the dark – modern outdoor lights are real all-rounders and are also particularly easy to install with a 24V-Plug & Play Connector System. All you need is a simple socket and a suitable driver that can be used to easily connect several lights. Simply select your favourite lights and start planning.


Sie akzentuieren die Fassade, rücken den Garten ins rechte Licht und sorgen dafür, dass Wege auch im Dunkeln gut sichtbar bleiben – moderne Outdoor-Leuchten sind echte Alleskönner und lassen sich mit einem 24V-Plug & Play Connector-System auch besonders einfach installieren. Was man dazu braucht? Eine simple Steckdose und einen passenden Treiber, über den sich auch mehrere Leuchten problemlos anschließen lassen. Also einfach Lieblingsleuchten auswählen und losplanen.



weverducre.com/24v-plugplay



1 Choose your luminaires

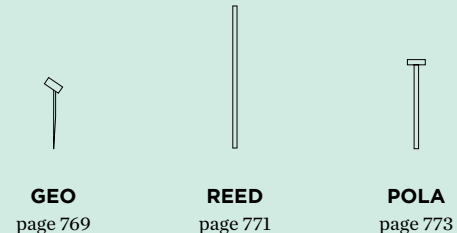

Two, three, four, or even more, the choice is yours! The number of lights and the sum of their individual wattages is the first thing you need to know to get started with your Plug & Play Connector System.


Good to know:
24V Plug & Play Connector System recommends adding 2 or more luminaires to the driver.

2 Define the distance between driver and luminaire

Adjacent or far away. The distance between the driver and the first light is very important as it determines the further options of your 24V Plug & Play Connector System lighting solution. You can find detailed information about your options at weverducre.com/24v-cable-length

Good to know:
Each driver is supplied with two 2.5m cables, one for each side.

3 Choose your driver and set up your luminaires

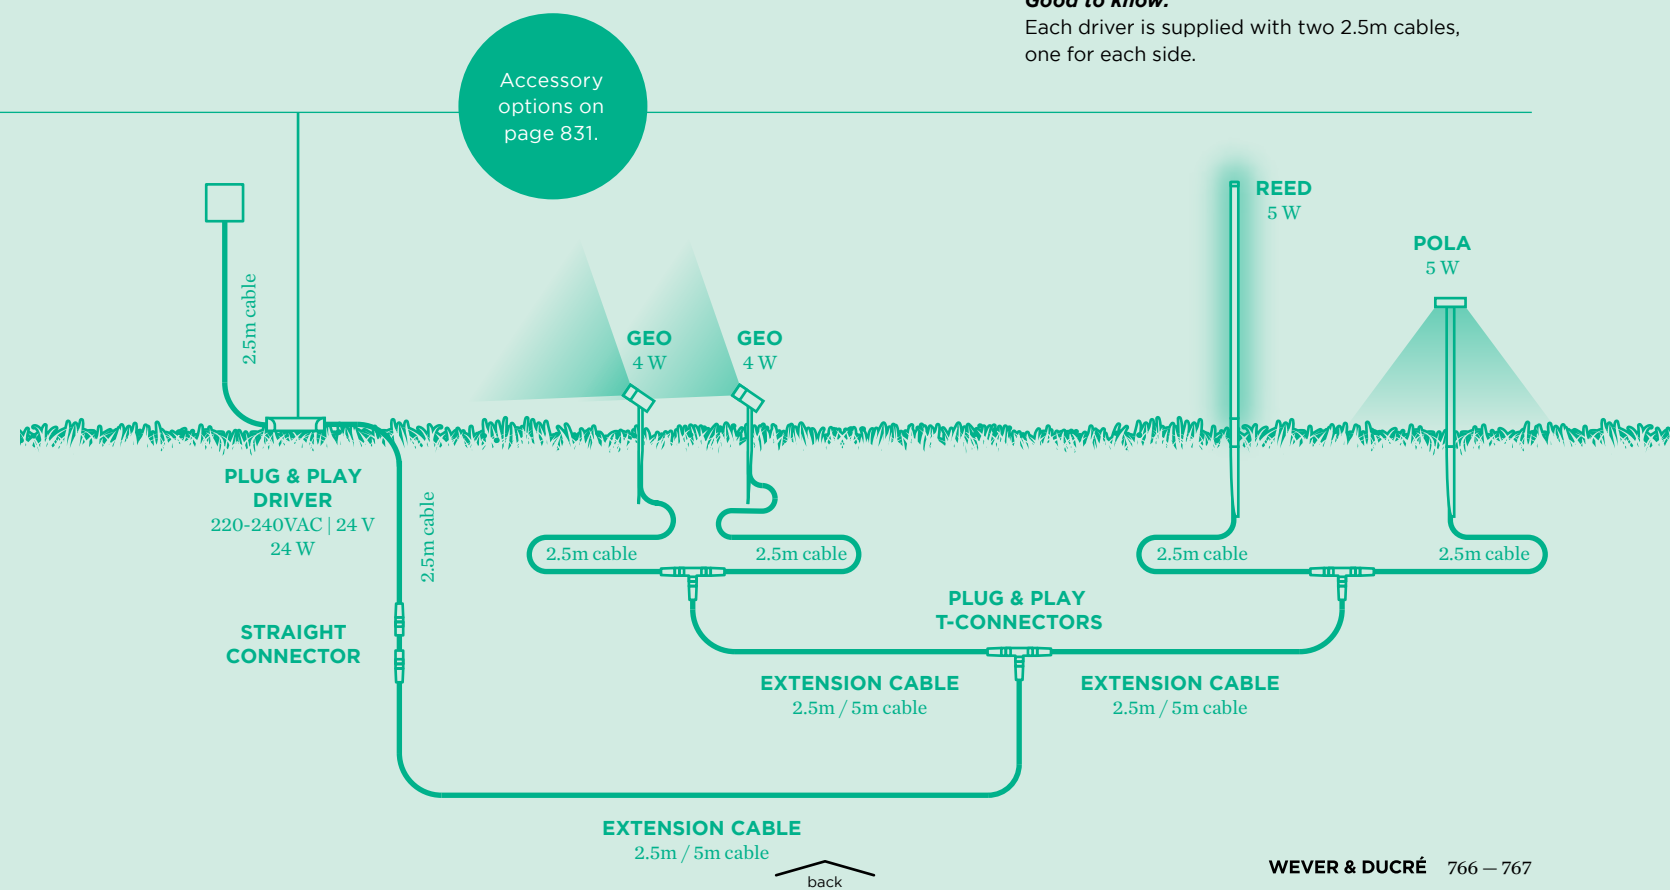




PRIVATE RESIDENCE GREECE

GEO

Outdoor
Floor surface

new



1.0

LED PCB 4W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F 0°-135° A30° SDCM3 L80I50K 0.29kg



2700K | CRI >90 | 250lm

CODE	CODE
90014504	767562A3
	767562Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

CODE	CODE
2.5m 90014502	24W 90018014
5m 90014503	60W 90018015



OPTIONAL

Plug & Play straight connector IP67
2x 24V female connector

CODE
90014504

Plug & Play t-connector IP67
3x 24V female connector

CODE
90014501

Plug & Play extension cable IP67
2x 24V male plug

CODE
2.5m 90014502
5m 90014503



back



REED

Outdoor
Floor surface

new

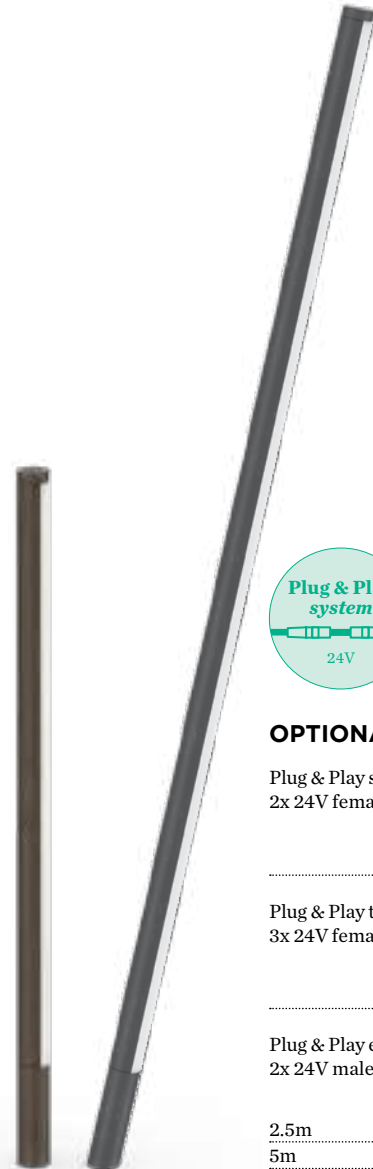

OPTIONAL

Plug & Play straight connector IP67
2x 24V female connector


CODE
90014504

Plug & Play t-connector IP67
3x 24V female connector

CODE
90014501

Plug & Play extension cable IP67
2x 24V male plug

	CODE
2.5m	90014502
5m	90014503



1.0

LED PCB 4W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F SDCM3 L80|50K 0.20kg


2700K | CRI >90 | 350lm

	CODE
	770182A3
	770182Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
24W	90018014
60W	90018015



2.0

LED PCB 5W | 24V | ground spike
aluminium | opal PC cover
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F SDCM3 L80|50K 0.30kg

2700K | CRI >90 | 450lm

	CODE
	770282A3
	770282Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug


	CODE
24W	90018014
60W	90018015



POLA

Outdoor
Floor surface

new



OPTIONAL

Plug & Play straight connector IP67
2x 24V female connector


CODE
90014504

Plug & Play t-connector IP67
3x 24V female connector

CODE
90014501

Plug & Play extension cable IP67
2x 24V male plug

	CODE
2.5m	90014502
5m	90014503



2.0

LED PCB 5W | 24V | ground spike
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F SDCM3 L80|100K 0.40kg


2700K | CRI >90 | 265lm

	CODE
	7381A2A3
	7381A2Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
24W	90018014
60W	90018015



2.1

LED PCB 5W | 24V | fixation plate
aluminium | glass
Plug & Play connector system
incl. 2.5m cable | male plug

IP65 H07R-F SDCM3 L80|100K 0.40kg

2700K | CRI >90 | 265lm

	CODE
	7382A2A3
	7382A2Q3

ALWAYS USE

Plug & Play driver | 220-240VAC | 24V
IP67 | incl. 2.5m cable with 240V plug
incl. 2.5 cable with 24V male plug

	CODE
24W	90018014
60W	90018015




PRIVATE RESIDENCE SPAIN



KIOSK

Outdoor
Floor surface



1.1

LED PCB 6W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 SDCM3 L80|50K 0.41kg

3000K | CRI >90 | 370lm

	CODE
	7072A4A5
	7072A4Q5

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0


	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019



1.2

LED PCB 12W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 SDCM3 L80|50K 0.53kg

3000K | CRI >90 | 2x370lm

	CODE
	7073A4A5
	7073A4Q5

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0


	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019



1.3

LED PCB 18W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

⊕ IP65 SDCM3 L80|50K 0.65kg

3000K | CRI >90 | 3x370lm

	CODE
	7074A4A5
	7074A4Q5

ALWAYS USE

pole | incl. ground spike

	CODE
400	910101_0
600	910102_0
800	910103_0

	CODE
	A
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019






PRIVATE RESIDENCE AUSTRIA

SWAM

Outdoor
Floor surface



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80I60K 0.97kg

2700K | CRI >90 | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

straight pole | incl. ground spike

	CODE
400	910090_0
600	910091_0
800	910092_0


	CODE
	B
	Q

order fixation separately

OPTIONAL

ground fixation plate

	CODE
	90019019



1.0

LED PCB 9W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM3 L80I60K 0.97kg

2700K | CRI >90 | 310lm

	CODE
	746178Q3
	746178K3
	746178B3

ALWAYS USE

curved pole | incl. ground spike

	CODE
400	910093_0
600	910094_0
800	910095_0

	CODE
	B
	Q

order fixation separately


OPTIONAL

ground fixation plate

	CODE
	90019019



back






HOTEL BRITANNIA | S-CONSULTANCY KNOCKE-HEIST | BELGIUM





TAPE

Outdoor
Floor surface



4.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80/60K 1.82kg


3000K | CRI >90 | 420lm

CODE
722274D5

OPTIONAL

ground spike

CODE
90013102



6.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80/60K 2.42kg


3000K | CRI >90 | 420lm

CODE
722374D5

OPTIONAL

ground spike

CODE
90013102



8.0

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80/60K 3.12kg


3000K | CRI >90 | 420lm


CODE
722474D5

OPTIONAL

ground spike


CODE
90013102





STIPO

Outdoor
Floor surface




1.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° Δ 38° SDCM3 L70|55K 0.59kg

3000K | CRI >90 | 450lm

	CODE
	737168A5
	737168Q5




2.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° Δ 38° SDCM3 L70|55K 0.56kg

3000K | CRI >90 | 500lm

	CODE
	737268A5
	737268Q5



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° Δ 38° SDCM3 L70|55K 0.53kg

3000K | CRI >90 | 450lm

	CODE
	737368A5
	737368Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q

order spike separately

OPTIONAL

ground spike

	CODE
	90013106

OPTIONAL

ground spike

	CODE
	90013106

OPTIONAL

ground spike

	CODE
	90013106



4.0

LED COB 7W | phase-cut dim
220-240VAC | 50/60Hz
aluminium

IP65 135° Δ 38° SDCM3 L70|55K 0.52kg

3000K | CRI >90 | 500lm

	CODE
	737468A5
	737468Q5

ALWAYS USE

pole

	CODE
200	910062_0
400	910064_0
600	910066_0

	CODE
	A
	Q


order spike separately

OPTIONAL

ground spike


	CODE
	90013106





STAKE | STAKE FOLD

Outdoor
Floor surface



1.0 STAKE

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0°-90° SDCM3 L80|60K 0.53kg

3000K | CRI >90 | 590lm

	CODE
	727174A5
	727174B5


OPTIONAL

ground spike

	CODE
	90013106

snoot

	CODE
	90019004



1.0 STAKE FOLD

LED COB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0°-90° SDCM3 L80|60K 0.79kg

3000K | CRI >90 | 590lm

	CODE
	727274A5
	727274B5


OPTIONAL

ground spike

	CODE
	90013107

snoot

	CODE
	90019004







PRIVATE RESIDENCE GREECE

X-BEAM

Outdoor
Floor surface



OPTIONAL

ground spike

CODE
90013115

snoot

CODE
90019023

snoot round

CODE
90019031

1.0

LED COB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° Δ 108° SDCM3 L80|60K 1.22kg

3000K | CRI >80 | 1680lm

CODE
700374D4
700374A4
700374B4



1.0 ROUND

LED PCB 25W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 0-110° Δ 108° SDCM3 L80|60K 1.30kg

3000K | CRI >80 | 1680lm

CODE
700474A4
700474Q4
700474B4



back



737







GATE

Outdoor
Floor surface

new



1.0

LED PCB 8W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 SDCM3 L80|50K 0.22kg

	CODE
	7581A4A_
	7581A4Q_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	360 >80	2
3000K	380 >80	4

ALWAYS USE

pole with fixation plate

	CODE
250	910121_0
450	910122_0
650	910123_0

	CODE
	A
	Q

2.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium | glass

IP65 SDCM3 L80|50K 0.22kg

	CODE
	7582A4A_
	7582A4Q_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x280 >80	2
3000K	2x300 >80	4

ALWAYS USE

pole with fixation plate

	CODE
250	910124_0
450	910125_0
650	910126_0

	CODE
	A
	Q



back






PRIVATE RESIDENCE BELGIUM

PALOS ROUND

Outdoor
Floor surface



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.70kg

CODE	
	4166A4A_
	4166A4Q_
	4166A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

ALWAYS USE

pole with fixation plate

CODE	
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

CODE	
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.70kg

CODE	
	4166A4A_
	4166A4Q_
	4166A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

ALWAYS USE

pole with concrete fixation

CODE	
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

CODE	
	A
	Q
	B




back



PALOS ROUND


Outdoor
Floor surface



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 1.16kg



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 1.16kg

CODE	
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4

ALWAYS USE

pole with fixation plate

CODE	
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

CODE	
	A
	Q
	B

CODE	
	4167A4A_
	4167A4Q_
	4167A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4

ALWAYS USE

pole with concrete fixation

CODE	
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

CODE	
	A
	Q
	B




back



URBANIZACIÓN SANTA ÀGUEDA | ALONSO + SOSA ARCHITECTS | RAFAEL GAVIRA Y EMILIO PELLEJERO LAS PALMAS | SPAIN

PALOS CARRÉ

Outdoor
Floor surface



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.65kg

CODE	
	4164A4A_
	4164A4Q_
	4164A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

ALWAYS USE

pole with fixation plate

CODE	
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

CODE	
	A
	Q
	B



1.0

LED PCB 11W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.65kg

CODE	
	4164A4A_
	4164A4Q_
	4164A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	605 >80	2
3000K	650 >80	4

ALWAYS USE

pole with concrete fixation

CODE	
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

CODE	
	A
	Q
	B




back





PALOS CARRÉ

Outdoor
Floor surface



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_


LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4

ALWAYS USE

pole with fixation plate

	CODE
170	910013_0
270	910014_0
470	910016_0
670	910018_0
870	910010_0

	CODE
	A
	Q
	B



2.0

LED PCB 21W | phase-cut dim
220-240VAC | 50-60Hz | incl. driver
aluminium

IP65 SDCM3 L80|60K 0.97kg

	CODE
	4165A4A_
	4165A4Q_
	4165A4B_

LIGHT COLOUR	LUMEN CRI	CODE
2700K	2x605 >80	2
3000K	2x650 >80	4

ALWAYS USE

pole with concrete fixation

	CODE
170	910073_0
270	910074_0
470	910076_0
670	910078_0
870	910070_0

	CODE
	A
	Q
	B






PRIVATE RESIDENCE BELGIUM

LINUS

Outdoor
Floor surface



3.0

LED COB 7W | phase-cut dim
220-240VAC | 50-60Hz
aluminium

IP65 SDCM2 L70|50K 0.69kg

3000K | CRI >90 | 230lm

	CODE
	726378D5
	726378A5
	726378Q5

ALWAYS USE


	CODE
pole	
150	910024_0
350	910026_0
550	910028_0

	CODE
	D
	A
	Q

OPTIONAL


ground spike	
	CODE
	90013103

ground fixation	
	CODE
	90013302






PRIVATE RESIDENCE | FIPE ARCHITECTS AUSTRIA

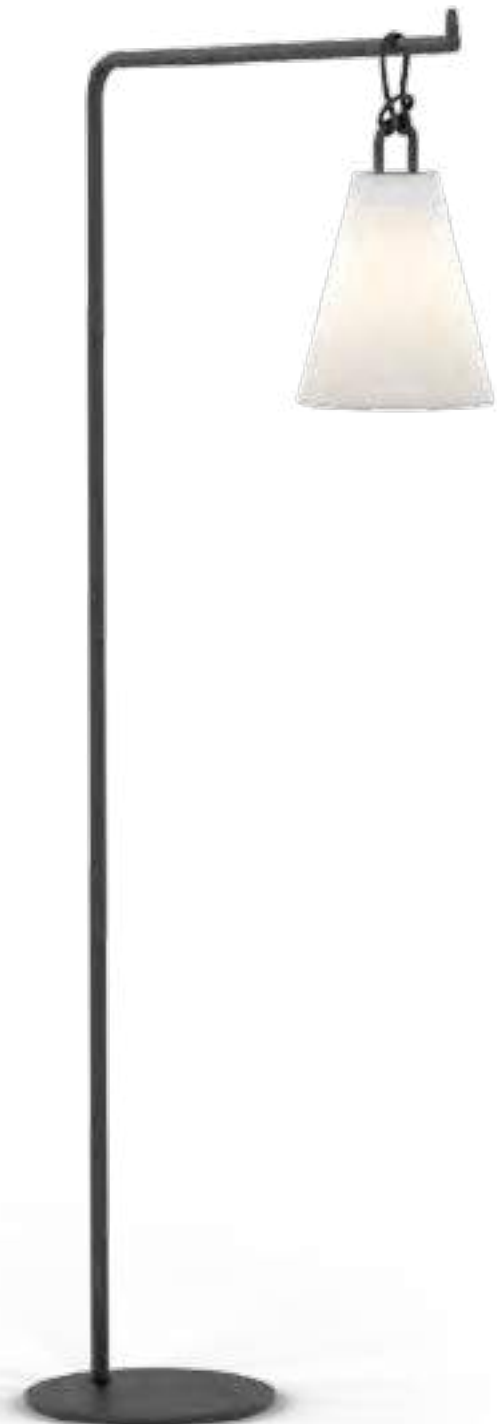

COSTA

Outdoor
Floor surface




1.0

LED channels 3W | 130lm
220-240VAC | 2200-4000K |
colour change via push button
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80/60K 1.00kg

handle colour

	CODE
	865186YE9
	865186OR9
	865186SB9
	865186OB9

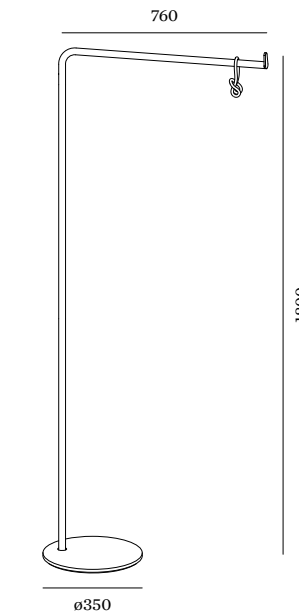

OPTIONAL


inox pole powder coated

	CODE	90057171
	CODE	90056001

OPTIONAL


1.0 rope

	CODE	90057171
	CODE	90057170






HOTEL YURBBAN BARCELONA | SPAIN

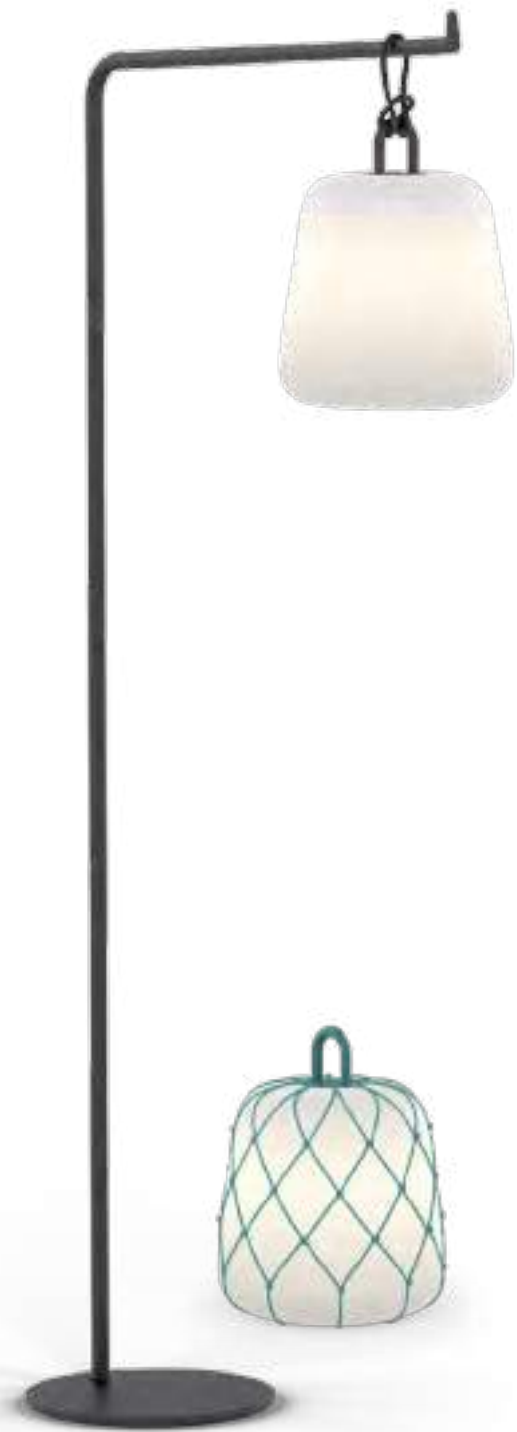

OPTIONAL
inox pole powder coated


CODE 90056001

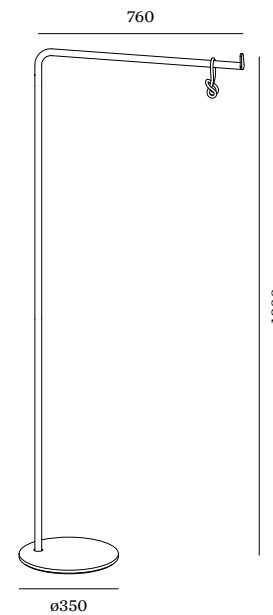

OPTIONAL

2.0 rope

	CODE
	90057192
	90057191
	90057193
	90057190



OPTIONAL


2.1 cage

	CODE
	90057182
	90057181
	90057183
	90057180

back

COSTA

Outdoor
Floor surface



2.0

LED channels 3W | 130lm
220-240VAC | 2200-4000K
colour change via push button
rechargeable li-ion battery
incl. charger | light for 8 hours
recharging time 5 hours
polyethylene | polypropylene

IP65 SDCM3 L80/60K 1.10kg

handle colour

	CODE
	865286YE9
	865286OR9
	865286SB9
	865286OB9



Accessories

Sometimes just one small item is missing before everything is perfect. How convenient that we have several of them. From the suitable driver to the flexible track system. That way, it will always be exactly as you imagined it.

DRIVER 250mA 5W DIM

5W | 250mA | 9-21V | phase-cut dim
220-240VAC | 50-60Hz

L/W/H 69x34x22

 IP20 0.04kg  

DEEP BIJOU 1.0 | **MATCH POINT**

1.0 trimless, 1.0, 1.0 IP44 | **DEEP**

POINT IP20 | **DEEP POINT IP44**

RONY POINT

DRIVER 250mA 10.5W DIM

10.5W | preset at 250mA | 26-42V
phase-cut dim | 220-240VAC

50-60Hz | 10-100%

L/W/H 122x41x23

 IP20 0.10kg  




DEEP BIJOU 2.0

DRIVER 250mA 13W DALI

13W | preset at 250mA | 2.5-52V |
DALI-2 | push dim | 220-240VAC

50-60Hz | 1-100%

L/W/H 144x33x21

 IP20 0.08kg  

DEEP POINT | **DEEP POINT IP44**

DEEP BIJOU 1.0, 2.0 | **MATCH**

POINT 1.0 trimless, 1.0, 1.0 IP44

RONY POINT

DRIVER 350mA 6W

6W | 350mA | 3-22V
90-264VAC | 50-60Hz

L/W/H 68x35x21

 IP20 0.04kg   

LITO | **ORIS** 0.7, 0.8, 1.3 | **STRIPE**

RETO indoor

DRIVER 350mA 13W DIM

13W | 350mA | 26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%

L/W/H 138x44x30

 IP20 0.11kg  

LED MODULES HO 905251W3

905251B3 | 902251W5 | 905251B5

905251B9 | 905251W9

PLANO PETIT 2.0 | **PIRRO PETIT**

6.0

DRIVER 350mA 14.7W DIM

14.7W | 350mA | 26-42V | phase-cut dim
220-240VAC | 50-60Hz

10-100%

L/W/H 122x41x23

 IP20 0.08kg




PIRRO PETIT 6.0

DRIVER 350mA 14W DALI

14W | preset at 350mA | 2.5-42V |
DALI-2 | push dim | 220-240VAC

50-60Hz | 1-100%

L/W/H 145x33x21

 IP20 0.08kg  

DEEP PETIT | **DEEP ADJUST**

PETIT 1.0, 1.0 trimless | **PLANO**

PETIT 1.0, 2.0, 3.0 | **STRANGE**

PETIT TRIMLESS 1.0, 2.0, 3.0 |

BLIEK PETIT 1.0 | **BLIEK PETIT**

TRIMLESS 1.0 | **LECA** | **CENO** 1.0

semi-recessed, 1.0, 1.1 | **MATCH** 1.0

trimless, 1.0 | **MATCH STICK** | **BLIEK**


ROUND PETIT 1.0 trimless, 1.0 |

LUNA ROUND/SQUARE

DRIVER 350mA 3W IP66

3W | 350mA | 3-12V
90-264VAC | 50-60Hz

L/W/H 52x30x23

 IP66 0.05kg   

ORIS 0.7, 0.8, 1.3, 2.0 | **CARD**

CODE
90226201

CODE
90226501

CODE
90246501

CODE
90213202

CODE
90223404

CODE
90223504




CODE
90243501

CODE
90213101

DRIVER 350mA 6W

6W | 350mA | 8.6-18V
100-240VAC | 50-60Hz

L/W/H 67x39x22

 IP20 0.04kg  

DEEP PETIT | **DEEP ADJUST**

PETIT 1.0, 1.0 trimless | **PLANO**

PETIT 1.0, 3.0 | **STRANGE PETIT**

TRIMLESS 1.0, 3.0 | **MATCH** 1.0

trimless, 1.0 | **MATCH STICK** | **LECA**

CENO 1.0 semi-recessed, 1.0, 1.1

BLIEK PETIT 1.0 trimless, 1.0 | **LUNA**

IP44 | **DEEP PETIT IP65**

DRIVER 350mA 30W

30W | 350mA | 43-86V
220-240VAC | 50-60Hz

L/W/H 127x43x30

 IP20 0.10kg  

DRIVER 350mA 7W DIM

7W | 350mA | 12-21V | phase-cut dim
220-240VAC | 50-60Hz

L/W/H 69x34x22

 IP20 0.04kg   

MATCH 1.0, trimless | **MATCH**

STICK | **LECA** | **CENO** 1.0 semi-

recessed, 1.0, 1.1 | **DEEP PETIT IP65**

DRIVER 350mA 10W DIM

10W | 350mA | 13-26V | phase-cut dim
220-240VAC | 50-60Hz

L/W/H 115x41x25

 IP20 0.08kg  

DEEP PETIT | **DEEP ADJUST**

PETIT 1.0, 1.0 trimless | **RONY**

POINT | **PLANO PETIT** 1.0, 3.0

PIRRO PETIT 4.0 | **STRANGE**

PETIT TRIMLESS 1.0, 3.0 | **MATCH**

1.0 trimless, 1.0 | **MATCH STICK**

LECA | **CENO** 1.0 semi-recessed, 1.0,

1.1 | **BLIEK PETIT** 1.0 trimless, 1.0

DEEP PETIT IP65 | **LUNA ROUND**

IP44 | **LUNA SQUARE IP44**

CODE
90213303

CODE
90213701

CODE
90223301

CODE
90223406

CODE
90213602

CODE
90223101



CODE
90218601

CODE
90228801

DRIVER | CONTROL GEAR


Accessories

DRIVER 500mA 6W

6W | 500mA | 3-12V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg C E  

DEEP BIJOU IP65 | THEMIS
STRANGE TRIMLESS wall | **LITO**

DRIVER 500mA 10W

10W | 500mA | 13-20V
220-240VAC | 50-60Hz
L/W/H 65x39x20
☐ IP20 0.04kg C E 

DEEP | DEEPER | DEEP ADJUST
1.0 | **DEEP ADJUST TRIMLESS**
DEEP ADJUST ASYM | DEEP
IP65 | DEEPER IP44 | BLIEK
ROUND | BLIEK SQUARE | RINI
SNEAK IP44 | RON 1.0 | RONY
STRANGE TRIMLESS 1.0 | PLANO
1.0 | **PLANO IP44 | TAIO IP65**
SNEAK 1.0 | SNEAK TRIMLESS 1.0

CODE

90214201

CODE


90214406

DRIVER 500mA 6.5W DIM

6.5W | preset at 500mA
7-13V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.07kg C E 

DEEP BIJOU IP65 | PIRRO 1.0

DRIVER 500mA 10W DIM

10W | 500mA | 12-21V | phase-cut dim
220-240VAC | 50-60Hz
L/W/H 115x41x25
☐ IP20 0.08kg C E 

DEEP | DEEPER | DEEP ADJUST
1.0 | **DEEP ADJUST TRIMLESS**
DEEP ADJUST ASYM | RONY
RON 1.0 | PLANO 1.0 | STRANGE
TRIMLESS 1.0 | SNEAK 1.0 | SNEAK
TRIMLESS 1.0 BLIEK ROUND
BLIEK SQUARE | PIRRO 2.0
DEEP IP65 | DEEPER IP44 | TAIO
IP65 | RINI SNEAK IP44 | PLANO
IP44 | PERLEZ IP44

DRIVER 500mA 20W DIM

20W | preset at 500mA
26-38V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
☐ IP20 0.01kg C E 

DEEP ADJUST 2.0 | PIRRO 4.0,6.0
PLANO 2.0 | RON 2.0 | STRANGE
TRIMLESS 2.0 | SNEAK 2.0
SNEAK TRIMLESS 2.0



CODE

90224403

CODE

90224602


DRIVER 500mA 10W 1-10V DIM

10W | 500mA | 10-20V | 1-10V dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 102x51x30
☐ IP20 0.06kg C E  

CODE

90234401

DRIVER 500mA 24W DALI


24W | preset at 500mA | 6-49V
DALI-2 | push dim | 220-240VAC
50-60Hz | 1-100%
L/W/H 143x43x30
☐ IP20 0.13kg C E 

DEEP | DEEPER | DEEP ADJUST
1.0, 2.0 | **DEEP ADJUST TRIMLESS**
DEEP ADJUST ASYM | RONY
RON 1.0, 2.0 | PLANO | STRANGE
TRIMLESS | SNEAK | SNEAK
TRIMLESS

CODE

90244701

DRIVER 500mA 7W IP67


7W | 500mA | 5-14.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.15kg C E 

DEEP BIJOU IP65 | ORIS 0.7, 0.8,
1.3, 2.0

CODE

90214301

DRIVER 500mA 24W IP68



24W | 500mA | 5-49V
99-264VAC | 50-60Hz
L/W/H 122x54x26
☐ IP68 0.25kg C E 

DEEP IP65 | DEEPER IP44
TAIO IP65

CODE


90214702

DRIVER 700mA 6W

6W | 700mA | 3-8.4V
90-264VAC | 50-60Hz
L/W/H 68x35x21
☐ IP20 0.04kg C E  

STRIPE | THEMIS | STRANGE
TRIMLESS wall | **ORIS 0.7, 0.8**

DRIVER 700mA 10W DIM

10W | preset at 700mA
8-14V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.08kg C E 


CODE

90215203

CODE


90225402

DRIVER 700mA 15W DIM

15W | preset at 700mA
12-20V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 122x41x23
☐ IP20 0.08kg C E 

PLANO PETIT 2.0 | STRANGE
PETIT TRIMLESS 2.0 | MATCH 2.0 |
CENO 2.0 | BLIEK PETIT 2.0

DRIVER 700mA 20W DIM

20W | preset at 700mA
15-28V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
☐ IP20 0.11kg C E 

CENO 3.0

CODE

90225502

CODE

90225604

CODE

90225701

DRIVER 700mA 30W DIM


30W | preset at 700mA
26-42V | phase-cut dim
220-240VAC | 50-60Hz | 10-100%
L/W/H 138x44x30
☐ IP20 0.14kg C E 

DEEP ADJUST FORT

CODE

90225702

DRIVER 700mA 28W DALI



28W | preset at 700mA | 6-40V
DALI-2 | push dim | 220-240VAC
50-60Hz | 1-100%
L/W/H 143x43x30
☐ IP20 0.13kg C E 

DEEP ADJUST FORT | MATCH 2.0
CENO 2.0,3.0 | BLIEK PETIT 2.0

CODE

90245704


DRIVER 700mA 7W IP67

7W | 700mA | 3-10.5V
90-295VAC | 47-63Hz
L/W/H 57x41x24
☐ IP67 0.07kg C E  

ORIS 0.7, 0.8, 1.3, 2.0


CODE

90215301




back

DRIVER 12V/10W

10W | 12V | phase-cut dim
220-240VAC | 50-60Hz | 3-10VA
L/W/H 102x51x30
☐ IP20 0.10kg C E 


DEEP MR16 | DEEPER MR16
DEEP ADJUST MR16 | DEEP
ADJUST TRIMLESS MR16 | DEEP
IP44 MR16 | DEEPER IP44 MR16
RINE SNEAK IP44 MR16 | PLANO
IP44 MR16

DRIVER 12V/25W

25W | 12V | phase-cut dim
220-240VAC | 50-60Hz | 8-25VA
L/W/H 145x51x30
☐ IP20 0.10kg C E 


DEEP MR16 | DEEPER MR16
DEEP ADJUST MR16 | DEEP
ADJUST TRIMLESS MR16 | DEEP
IP44 MR16 | DEEPER IP44 MR16
RINE SNEAK IP44 MR16 | PLANO
IP44 MR16

DRIVER 24V/25W

2.4-25W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 128x52x30
☐ IP20 0.11kg C E 



ILANE

DRIVER 24V/35W


35W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 142x43x30
☐ IP20 0.14kg C E 

ILANE

WIRE THROUGH CONNECTOR BOX

3 pole
L/W/H 105x58x30
☐ IP20  min.66 0.06kg C E 

WIRE THROUGH CONNECTOR BOX

3 pole + DALI
L/W/H 105x58x30
☐ IP20  min.66 0.07kg C E 

CODE

90221401

CODE

90221701

CODE

90222701

CODE

90212801


CODE

90059145

CODE


90059146

DRIVER 24V/50W

12-50W | 24V | phase-cut dim | trailing
edge only | 220-240VAC | 50-60Hz
L/W/H 184x61x32
☐ IP20 0.24kg C E 


ILANE

DRIVER 24V/100W

100W | 24V | PWM dim
220-240VAC | 50-60Hz
L/W/H 295x43x30
☐ IP20 0.23kg C E 


ILANE

DRIVER 24V/100W DALI

100W | 24V | DALI
220-240VAC | 50-60Hz
L/W/H 295x43x30
☐ IP20 0.25kg C E 

ILANE

DRIVER 24V/35W IP67

35W | 24V
100-277VAC | 50-60Hz
L/W/H 175x31x43
☐ IP67 0.56kg C E 

RETO outdoor

CODE

90222901

CODE

90212902

CODE

90242901

CODE

90212802


CODE

90059125

CODE


90059126

DRIVER 24V/100W IP67

100W | 24V
100-277VAC | 50-60Hz
L/W/H 178x68x39
☐ IP67 0.83kg C E 


RETO outdoor

DRIVER 48V/100W

100W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
☐ IP20 0.18kg C E 


STREX SYSTEM

DRIVER 48V/150W

150W | 48V
220-240VAC | 50-60Hz
L/W/H 350x30x18
☐ IP20 0.28kg C E 

STREX SYSTEM

DRIVER 48V/250W

250W | 48V
220-240VAC | 50-60Hz
L/W/H 400x40x22
☐ IP20 0.50kg C E 

STREX SYSTEM

DALI TO PHASE-CUT DIMMING MODULE





for converting a DALI signal
to phase-cut dim
LED | 10-300W | 230V
L/W/H 120x30x22
☐ IP20 0.05kg C E

DIMMER DIN RAIL

max. 200W LED | 230V
phase-cut dim
L/W/H 17x55x90
IP30 0.09kg C E

DIMMER FOR SWITCH

max. 200W LED | 230V
phase-cut dim
L/W/H 48x17.5x46
IP30 0.09kg C E



CODE

90212903

CODE

90218901

CODE

90218902

CODE

90218903

CODE

90270901

CODE

90019018

CODE

90019017

LED MODULE HO

12W | 350mA | 35Vf
1800-3000K | CRI >90 | 1050lm
compatibility on request
IP20 0.06kg CE A 26°



CODE

905251W9

905251B9

LED MODULE HO 2700K

12W | 350mA | 35Vf
2700K | CRI >90 | 1340lm
compatibility on request
IP20 0.06kg CE A 26°



CODE

905251W3

905251B3

LED MODULE HO 3000K

12W | 350mA | 35Vf
3000K | CRI >90 | 1410lm
compatibility on request
IP20 0.06kg CE A 26°



CODE

905251W5

905251B5

LED MODULE HO 4000K

12W | 350mA | 35Vf
4000K | CRI >90 | 1420lm
compatibility on request
IP20 0.06kg CE A 26°




CODE

905251W7

905251B7

LED MODULE CABLE

extension cable between LED module and driver



CODE

1m 90019200

2m 90019201

3m 90019202

PAR16 LED 2700K

6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
2700K | CRI >90 | 460lm
IP20 0.08kg CE A 35°



CODE

901228W3

PAR16 LED 2700K

6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 437lm |
IP20 0.08kg CE A 35°



CODE

901228B3

PAR16 LED 3000K

6.5W | GU10 | phase-cut dim
175-250VAC | 50-60Hz
3000K | CRI >90 | 500lm
IP20 0.08kg CE A 35°



CODE

901228W5

PAR16 LED 3000K

6.5W | GU10 | phase-cut dim
220-240VAC | 50-60Hz
3000K | CRI >90 | 457lm
IP20 0.08kg CE A 35°



CODE

901228B5

PAR16 LED 2700K

4.3W | GU10
220-240VAC | 50-60Hz
2700K | CRI >80 | 350lm
IP20 0.06kg CE A 36°



CODE

905227S2

PAR16 LED 3000K

4.3W | GU10
220-240VAC | 50-60Hz
3000K | CRI >80 | 350lm
IP20 0.06kg CE A 36°



CODE

905227S4

METAL SPRING CLIP

alternative front lamp fixation spring for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | DEEP ASYM
DEEP 2.0 | PLANO | STRANGE
ceiling | **SPINEO | SOLID**



CODE

90019700

SPRING CLIP

lamp fixation | push-in system for ø 50 lamp rings
MR16 | LED | PAR16 | max. 12W
DEEP ADJUST | DEEP ASYM
DEEP 2.0 | PLANO | STRANGE
ceiling | **SPINEO | SOLID**

CODE

900198W0


900198S0

900198G0

900198M0

900198Q0



900198B0



back

QT14 LED 2700K

2.6W | G9 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >80 | 300lm
DRO 1.0
IP20 0.03kg €€




CODE

clear 9010G802

QT14 LED 3000K

3W | G9 | 220-240VAC | 50Hz
3000K | CRI >80 | 300lm
RAY wall | **BOX** wall
IP20 0.03kg €€




CODE

clear 9019G703

QT14 LED 3000K

3.1W | G9 | phase-cut dim
220-240VAC | 50-60Hz
3000K | CRI >80 | 280lm
DRO 1.0
IP20 0.03kg €€





CODE

clear 9010G804

C35 LED 2700K

5.5W | E14 | phase-cut dim | 20-100%
220-240VAC | 50-60Hz
2700K | CRI >90 | 450lm
DRO 2.0
IP20 0.03kg €€




CODE

opal 9003C103

A60 LED 2700K

9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 800lm
DRO 3.0 | **ROOMOR** suspended
SHIEK | **BISHOP**
IP20 0.04kg €€




CODE

opal 9003E152

A65 LED 2700K

14.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1378lm
DRO 4.0
IP20 0.04kg €€




CODE

opal 9003E153

G95 LED 2700K

11.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 1100lm
BISHOP
IP20 0.11kg €€




CODE

opal 9003E154

G95 LED 2200K

5.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 380lm
RUVI | **BISHOP**
IP20 0.07kg €€



CODE

gold tinted 9003E111

G95 LED 2700K

5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 483lm
TRACE SUSPENDED 2.1
IP20 0.07kg €€



CODE

clear 9003E160

ST64 LED 2200K DIM

5.9W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 433lm
IP20 0.05kg €€




CODE

gold tinted 9003E110

G125 LED 2200K

6.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 450lm
IP20 0.11kg €€





CODE

gold tinted 9003E112

A60 LED 2700K

5.5W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 409lm
MIRRO 1.0
IP20 0.04kg €€




CODE

gold mirror 9003E139

silver mirror 9003E140

G95 LED 2200K

5.1W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >95 | 371lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg €€




CODE

gold mirror 9003E156

silver mirror 9003E157

G95 LED 2700K

5.6W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 464lm
MIRRO 2.0, 3.0 | **RUVI**
IP20 0.07kg €€




CODE

gold mirror 9003E142

silver mirror 9003E157

T30-225 LED 2200K

5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 382lm
WIRO 1.8, 3.8 | wall | **CONE**
DIAMOND | **GLOBE 4.0**
IP20 0.06kg €€



CODE

gold tinted 9003E129

T30-225 LED 2700K

5.3W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 425lm
WIRO 1.8, 3.8, 6.1, 6.5 | wall
CONE | **GLOBE 4.0**
IP20 0.06kg €€



CODE

gold tinted 9003E136

T30-300 LED 2200K

7.2W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2200K | CRI >90 | 585lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg €€



CODE

gold tinted 9003E130


T30-300 LED 2700K

7.4W | E27 | phase-cut dim
220-240VAC | 50-60Hz
2700K | CRI >90 | 613lm
WIRO 6.1, 6.5 | **DIAMOND**
GLOBE 1.0, 2.0, 5.0
IP20 0.08kg €€



CODE

gold tinted 9003E135



back

ACCESSORIES

Accessories

HONEYCOMB LOUVER
BLIEK PETIT | CENO | LECA
PIRRO



ø29

CODE

90051131

HONEYCOMB LOUVER
CENO FORT



ø61

CODE

90051132

ODREY
inner cover for 1.6 | 1.7



ø55

42

CODE

911420W0

911420G0

911420B0

CORK
bottle 1 | clear glass




ø75

174

CODE

90019013

CORK
bottle 2 | clear glass with closing cap




ø87

323

CODE

90019014

FINLIN COVER PLATE ADAPTER
for concrete housings




100

3

CODE

900194B0

FINLIN
wall/base spacer for overlapping
luminaires



26

18


45

10

CODE

900195B0

FINLIN ROUND
wall/base spacer for overlapping
luminaires



30

23


52

10

CODE

900196B0

BOX | RAY
flaps for adjustable beam angle
white | for BOX/RAY QT14 only



88

66

75

CODE

900401W0

STAKE
snoot



30


75

39

CODE

90019004

X-BEAM
snoot



45


138

138

CODE

90019023

X-BEAM
snoot round



45


ø166

CODE

90019031

DEEP ADJUST PETIT TRIMLESS | BLIEK PETIT TRIMLESS

aluminium plasterkit
⌀ 78-80 | 11.80 | 12.5, 15, 20, 25



Ø73


126

29

CODE

90017210

DEEP ADJUST TRIMLESS
aluminium plasterkit
⌀ 105-110 | 12.5, 15, 20, 25



Ø105


157

29

CODE

90017209

STRANGE PETIT TRIMLESS 1.0
aluminium plasterkit
⊠ 64x64 | 7-32



62


62

42

CODE

90017202

STRANGE PETIT TRIMLESS 2.0
aluminium plasterkit
⊠ 64x117 | 7-32



113


62

42

CODE

90017205

STRANGE PETIT TRIMLESS 3.0
aluminium plasterkit
⊠ 64x169 | 7-32



165


62

42

CODE

90017208

STRANGE TRIMLESS 1.0 SNEAK TRIMLESS 1.0
aluminium plasterkit
⊠ 86x86 | 7-32



81


81

42

CODE

90017120

STRANGE TRIMLESS 2.0 SNEAK TRIMLESS 2.0
aluminium plasterkit
⊠ 156x86 | 7-32



151

81

42

CODE

90017121

LITO
plasterkit




120

120

∞

CODE

90017119



back


PLASTERKITS

Accessories

RECESSED HOUSING


Accessories

PLANO 1.0
plasterkit



CODE
90017104

PLANO 2.0
plasterkit




CODE
90017105

LITO
always use in combination with
plasterkit
122x90 11.45




CODE
90012027

THEMIS 1.7
always use in combination with
plasterkit
272x160 11.85




CODE
90012032

THEMIS 2.7
always use in combination with
plasterkit
372x160 11.85




CODE
90012033

STRIPE 0.4 | 0.7
recessed housing incl. plasterkit
75x75 11.65




CODE
90012037

STRIPE 2.2
recessed housing incl. plasterkit
251x76 11.65




CODE
90012038

THEMIS 1.7
plasterkit




CODE
90017111

THEMIS 2.7
plasterkit




CODE
90017112

ORIS 0.7 | RETO 2.0
concrete housing
192x58 11.60




CODE
90012044

ORIS 0.8 | RETO 0.8
concrete housing
70x70 11.65




CODE
90012046

ORIS 1.3 | RETO 1.3
concrete housing
122x122 11.60




CODE
90012040

ORIS 2.0
concrete housing
123x191 11.60




CODE
90012042

ORIS 0.7 | RETO 2.0
recessed housing incl. plasterkit
191x58 11.75




CODE
90012039

ORIS 0.8 | RETO 0.8
recessed housing incl. plasterkit
70x70 11.80




CODE
90012047

ORIS 1.3 | RETO 1.3
recessed housing incl. plasterkit
122x122 11.75




CODE
90012041

ORIS 2.0
recessed housing incl. plasterkit
123x191 11.75




CODE
90012043

MAP 0.6 | CHART 0.6
BLINK | TRIMLESS
ground housing
137 11.10




CODE
90012201

MAP 0.9 | CHART 0.9
ground housing
137 11.30




CODE
90012202

MAP 1.2 | CHART 1.2
MAP ASYM 1.2 | CHART
ASYM 1.2
ground housing
190 11.58




CODE
90012203

MAP 1.6 | CHART 1.6
MAP ASYM 1.6 | CHART
ASYM 1.6
ground housing
220 11.84



CODE
90012204



ILANE


Accessories

STREX SYSTEM

Accessories

DALI SELV DEVICE


for 48V system | max. 300W | 48VDC
L/W/H 213x37x25



CODE
90019193

ILANE BLACK DIFFUSER

only for 1.0




CODE

2m 911902B1
3m 911903B1

ILANE BLACK DIFFUSER

only for 3.0




CODE

2m 911912B1
3m 911913B1

RECESSED

track | custom cuts | 48V | 15A | DALI




CODE

	< 1m	90014187CC
	< 1m	90014188CC
	< 2m	90014189CC
	< 2m	90014190CC
	< 3m	90014191CC
	< 3m	90014192CC

CC = for lengths specifications please add four digits in mm

SURFACE

track | custom cuts | 48V | 15A | DALI



CODE


	< 1m	90014181CC
	< 1m	90014182CC
	< 2m	90014183CC
	< 2m	90014383CC
	< 2m	90014384CC
	< 2m	90014184CC

	< 3m	90014185CC
	< 3m	90014385CC
	< 3m	90014386CC
	< 3m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSPENDED

track | custom cuts | 48V | 15A | DALI



CODE


	< 1m	90014181CC
	< 1m	90014182CC
	< 2m	90014183CC
	< 2m	90014383CC
	< 2m	90014384CC
	< 2m	90014184CC

	< 3m	90014185CC
	< 3m	90014385CC
	< 3m	90014386CC
	< 3m	90014186CC

CC = for lengths specifications please add four digits in mm

SUSP. INDIRECT LIGHT

track | custom cuts | 48V | 15A | DALI
with indirect light




CODE

	< 2m	900140W_CC
	< 2m	900140B_CC
	< 3m	900141W_CC
	< 3m	900141B_CC

LIGHT COLOUR LUMEN|CRI CODE
3000K | 14W/m 950/m | >90 5
CC = for lengths specifications please add four digits in mm

ILANE MINI CONNECTOR

strip to strip - continuous




CODE

IP20 90014272

ILANE MINI CONNECTOR

strip to wire




CODE

IP20 90014268

ILANE MINI CONNECTOR

strip to strip



CODE

IP20 90014269

1-PHASE TRACK

Accessories

TRACK ADAPTER 1.0


no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 10kg



CODE	
90014044	90014043


TRACK ADAPTER 2.0

no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 3kg



CODE	
90014277	90014278


ADJUSTABLE CORNER



CODE	
90014042	90014041

COVERPLATE I/L/T/X


only use with recessed tracks



CODE	
90014126	90014127


COVERPLATE END FEEDS

only use with recessed tracks




CODE	
90014124	90014125

X-FEED




CODE	
90014049	90014050

T-FEED 1.0




CODE	
90014010	90014011

T-FEED 2.0




CODE	
90014012	90014013

T-FEED 3.0




CODE	
90014014	90014015

T-FEED 4.0




CODE	
90014016	90014017

T-FEED 1.0




CODE	
90014228	90014229

T-FEED 2.0




CODE	
90014230	90014231

T-FEED 3.0



CODE	
90014232	90014233

T-FEED 4.0




CODE	
90014234	90014235

3-PHASE TRACK

Accessories

CUTTING TOOL


for cutting the inner copper cables of
3-phase track and 48V track
CE TÜV



CODE	
90014165	

TRACK ADAPTER


no space for driver
for suspended luminaires without
steel wire | incl. strain relief
max. weight 5kg



CODE	
90014279	90014280


HOOK

max. weight 5kg




CODE	
90014284	90014285

FLEXIBLE CONNECTOR



CODE	
90014288	90014289

X-FEED




CODE	
90014248	90014249

SUSPENSION OPTIONS

Accessories

SOLLI COCOON 3.0

acoustic element
aluminium | PET felt material




CODE

	238500MF0
	238500LF0
	238500OF0

HOOK

for cable 4.25-5.5mm diameter | for single and multi suspension | also for textile cable




CODE

	90052079
	90052080

HOOK

standard multi suspension hook for ø5 plugs




CODE

	90052025
	90052024

HOOK

optional multi suspension hook for ø6 plugs




CODE

	90052066
	90052065

SHIEK 4.0

cable ring for 3 luminaires




CODE

	90059123
	90059121

STRAIN RELIEF

for suspended luminaire power cable fixation in base




CODE

	90052064
--	----------

CABLE WALL/CEILING BRACKET

for cable 4.25-5.5mm diameter



CODE


	90019197
	90019198

WIRO SUSPENDED

Accessories

WIRO

cable wall bracket only for WIRO textile cable




CODE

	90052062
--	----------

CABLE PLUG AND PLAY

E27 LED 4-25W | connector set for one shade | black textile cable | incl. cable plug with dimmer | 2 cable brackets included




CODE

	8.5m	90015165
--	------	----------

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included




CODE

	2.6m	90052050
--	------	----------

DECENTER SET 1.0

A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 1 shade
round ceiling base | black textile cable
1 base + 1 end stop included




CODE

	6m	90052051
--	----	----------

DECENTER SET 2.0

2x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 2 shades
round ceiling base | black textile cable
1 multibase + 2 end stops included




CODE

	2.6m	90052055
	6m	90052056

DECENTER SET 3.0

3x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 3 shades
round ceiling base | black textile cable
1 multibase + 3 end stops included




CODE

	2.6m	90052060
	6m	90052063


DECENTER SET 4.0

4x A60 max. 60W | E27
220-240VAC | 50-60Hz
suspension set for 4 shades
round ceiling base | black textile cable
1 multibase + 4 end stops included




CODE

	2.6m	90052067
	6m	90052078




back

KIOSK POLE 400
straight pole | incl. ground spike




CODE	
400	910101A0
400	910101Q0

KIOSK POLE 600
straight pole | incl. ground spike




CODE	
600	910102A0
600	910102Q0

KIOSK POLE 800
straight pole | incl. ground spike




CODE	
800	910103A0
800	910103Q0

SWAM POLE 400
straight pole | incl. ground spike




CODE	
	910090Q0
	910090B0

SWAM POLE 600
straight pole | incl. ground spike




CODE	
	910091Q0
	910091B0

SWAM POLE 800
straight pole | incl. ground spike




CODE	
	910092Q0
	910092B0

STIPO POLE 200
with fixation plate | 3.0, 4.0




CODE	
	910062A0
	910062Q0

STIPO POLE 400
with fixation plate | 3.0, 4.0




CODE	
	910064A0
	910064Q0

STIPO POLE 600
with fixation plate | 3.0, 4.0




CODE	
	910066A0
	910066Q0

SWAM POLE 400
curved pole | incl. ground spike




CODE	
	910093Q0
	910093B0

SWAM POLE 600
curved pole | incl. ground spike



CODE	
	910094Q0
	910094B0

SWAM POLE 800
curved pole | incl. ground spike




CODE	
	910095Q0
	910095B0

KIOSK | SWAM
fixation plate




CODE	
	90019019

STIPO | STAKE 1.0
ground spike




CODE	
	90013106

STAKE FOLD
ground spike




CODE	
	90013107

X-BEAM
ground spike



CODE	
	90013115

TAPE
ground spike




CODE	
	90013102

POLE | GROUND FIXATION


Accessories

POLE 170
with fixation plate
PALOS ROUND | PALOS CARRÉ




CODE	
	910013A0
	910013Q0
	910013B0

POLE 170
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ



CODE	
	910073A0
	910073Q0
	910073B0

GATE 1.0 POLE 250
pole with fixation plate




CODE	
	250 910121A0
	250 910121Q0

GATE 1.0 POLE 450
pole with fixation plate




CODE	
	450 910122A0
	450 910122Q0

GATE 1.0 POLE 650
pole with fixation plate




CODE	
	650 910123A0
	650 910123Q0

POLE 270
with fixation plate
PALOS ROUND | PALOS CARRÉ




CODE	
	910014A0
	910014Q0
	910014B0

POLE 270
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




CODE	
	910074A0
	910074Q0
	910074B0

POLE 470
with fixation plate
PALOS ROUND | PALOS CARRÉ




CODE	
	910016A0
	910016Q0
	910016B0

POLE 470
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




CODE	
	910076A0
	910076Q0
	910076B0

GATE 2.0 POLE 250
pole with fixation plate




CODE	
	250 910124A0
	250 910124Q0

GATE 2.0 POLE 450
pole with fixation plate




CODE	
	450 910125A0
	450 910125Q0

GATE 2.0 POLE 650
pole with fixation plate




CODE	
	650 910126A0
	650 910126Q0

POLE 670
with fixation plate
PALOS ROUND | PALOS CARRÉ




CODE	
	910018A0
	910018Q0
	910018B0

POLE 670
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ




CODE	
	910078A0
	910078Q0
	910078B0

POLE 870
with fixation plate
PALOS ROUND | PALOS CARRÉ




CODE	
	910010A0
	910010Q0
	910010B0

POLE 870
with concrete ground fixation
PALOS ROUND | PALOS CARRÉ



CODE	
	910070A0
	910070Q0
	910070B0



back


POLE | GROUND FIXATION

Accessories

GEO | REED | POLA


Accessories



LINUS POLE 150
with fixation plate




	CODE
	910024D0
	910024A0
	910024Q0


LINUS POLE 350
with fixation plate




	CODE
	910026D0
	910026A0
	910026Q0

LINUS POLE 550
with fixation plate




	CODE
	910028D0
	910028A0
	910028Q0

LINUS
ground spike




	CODE
	90013103

LINUS
concrete ground fixation




	CODE
	90013302

PLUG & PLAY DRIVER 24V/24W IP67
24W | 24V
220-240VAC | 47-63Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
L/W/H 118x35x26
IP67 CE




	CODE
	90018014

PLUG & PLAY DRIVER 24V/60W IP67
60W | 24V
220-240VAC | 47-63Hz
incl. 2.5m cable with 240V plug
incl. 2.5m cable with 24V male plug
L/W/H 163x43x32
IP67 CE




	CODE
	90018015

PLUG & PLAY EXTENSION CABLE
2x 24V male plug
IP67 H07RN-F CE




	CODE
2.5m	90014502
5m	90014503

PLUG & PLAY STRAIGHT CONNECTOR
2x 24V female connector
IP67 H07RN-F CE



	CODE
	90014504












PLUG & PLAY T-CONNECTOR
3x 24V female connector
IP67 CE



	CODE
	90014504

Icons and standards

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
	Cutout Round	Ausschnitt rund	Ronde inbouwopening	Découpe ronde	Corte circular	Taglio tondo
	Cutout Square	Ausschnitt eckig	Rechthoekige inbouwopening	Découpe rectangulaire	Corte rectangular	Taglio quadro
	Recessed Depth	Einbautiefe	Inbouwdiepte	Profondeur d'encastrement	Profundidad de empotramiento	Profondità dell'incasso
	Low Recessed Depth	Geringe Einbautiefe	Lage inbouwdiepte	Encastré Profondeur faible	Reducida profundidad de empotramiento	Profondità dell'incasso ridotta
	Thickness	Stärke	Dikte	Épaisseur	Espesor	Spessore
	Rotatable vertically horizontally	Drehbar vertikal horizontal	Draaibaar verticaal horizontaal	Orientable verticalement horizontalement	Orientable en vertical horizontal	Orientabile in verticale orizzontale
	Beam Angle	Abstrahlwinkel	Reflectorhoek	Faisceau	Ángulo de apertura	Fascio luminoso
	Class 1 Fixture	Leuchte der Schutzklasse 1	Toestel klasse 1	Appareil classe 1	Aparato de clase 1	Lampada classe 1
	Class 2 Fixture	Leuchte der Schutzklasse 2	Toestel klasse 2	Appareil classe 2	Aparato de clase 2	Lampada classe 2
	Class 3 Fixture	Leuchte der Schutzklasse 3	Toestel klasse 3	Appareil classe 3	Aparato de clase 3	Lampada classe 3
	IP rating	IP Bewertung	IP rating	Indice de protection	Grado IP	Grado di protezione IP
	Frontal IP rating	Frontale IP Bewertung	Frontale IP-classificatie	Évaluation IP frontale	Grado IP en parte frontal	Grado di protezione IP frontale
	IK rating	Schlagfestigkeit	IK rating	IK rating	Grado IK	IK rating
	Screen-compatible workplace light	Bildschirmtaugliche Arbeitsplatzleuchte	Werkplekverlichting is compatibel met beeldscherm	Éclairage compatible pour écran d'ordinateur	Iluminación para puestos de trabajo compatible con pantallas	Adatta per ambienti di lavoro uffici
	IC rated: may be covered with insulation material	IC Rated: kann mit Isoliermaterial abgedeckt werden	IC classificatie; kan worden bedekt met isolatiemateriaal	Classé IC: peut être recouvert d'un matériau isolant	Clasificación IC: puede cubrirse con material aislante	Protezione IC. Può essere coperto con materiale isolante
	LED Lifetime: Lumen output is minimum 80% after 50.000 hours	LED-Lebensdauer: Die Lichtausbeute nach 50.000 Stunden beträgt mindestens 80 %	Led-levensduur: de lichtopbrengst na 50.000 uur is minimaal 80%	Durée de vie des LED: l'efficacité lumineuse au bout de 50 000 heures s'élève à 80 % minimum	Vida útil de los LED: la eficiencia luminosa tras 50.000 horas es de al menos el 80 %	Durata dei LED: l'efficienza luminosa è pari ad almeno l'80% dopo 50.000 ore di funzionamento
	Standard Deviation Colour Matching	Standardabweichung des Farbgleichs	Standaarddeviatie van kleurafstemming	Écart-type de la correspondance des couleurs	Desviación estándar de la coincidencia de colores	Deviazione standard del bilanciamento del colore

ICON	ENGLISH	GERMAN	DUTCH	FRENCH	SPANISH	ITALIAN
	CE conform	CE-konform	CE-conform	Conformité CE	Conformidad CE	Conformità CE
	ENEC Certificate	ENEC Zertifikat	ENEC Certificaat	Certificat ENEC	Certificado ENEC	Certificato ENEC
	UL Certificate	UL Zertifikat	UL Certificaat	Certificat UL	Certificado UL	Certificato UL
	Colour Temperature	Farbtemperatur	Kleurtemperatuur	Température de couleur	Temperatura de color	Temperatura colore
	Part not included	Teil nicht inkludiert	Niet inbegrepen	Pièce non comprise	Parte no incluida	Articolo non incluso
	Up/Down	Aufwärts/abwärts strahlend	Verlichting up of down	Éclairage haut ou bas	Emisión superior/ inferior	Luce monoemissione sopra/sotto
	Up and Down	Direkt und indirekt abstrahlend	Verlichting up en down	Éclairage haut et bas	Emisión superior e inferior	Luce biemissione sopra/sotto
	Energy labelling regulation	Verordnung über die Energiekennzeichnung	Energie-etiketterings-verordening	Règlement sur l'étiquetage énergétique	Reglamento sobre el etiquetado energético	Regolamento sull'etichettatura energetica
	Light source replaceable by end user	Lichtquelle durch Endverbraucher austauschbar	Lichtbron door eindgebruiker te vervangen	Source lumineuse remplaçable par l'utilisateur final	Fuente luminosa sustituable por el usuario	Sorgente luminosa sostituibile dall'utente finale
	Light source not replaceable	Lichtquelle nicht austauschbar	Lichtbron niet te vervangen	Source lumineuse non remplaçable	Fuente luminosa no sustituable	Sorgente luminosa non sostituibile
	Control gear replaceable by end user	Betriebsgerät durch Endverbraucher austauschbar	Driver door eindgebruiker te vervangen	Dispositif de commande remplaçable par l'utilisateur final	Mecanismo de control sustituable por el usuario	Dispositivo di controllo sostituibile dall'utente finale
	Control gear not replaceable	Betriebsgerät nicht austauschbar	Driver niet te vervangen	Dispositif de commande non remplaçable	Mecanismo de control no sustituable	Dispositivo di controllo non sostituibile
	Light source replaceable by authorized professional	Lichtquelle durch autorisierte Fachleute austauschbar	Lichtbron door erkende vakmensen te vervangen	Source lumineuse remplaçable par un professionnel agréé	Fuente luminosa sustituable por un técnico autorizado	Sorgente luminosa sostituibile da tecnici specializzati
	Control gear replaceable by authorized professional	Betriebsgerät durch autorisierte Fachleute austauschbar	Driver door erkende vakmensen te vervangen	Dispositif de commande remplaçable par un professionnel agréé	Mecanismo de controls sustituable por un técnico autorizado	Dispositivo di controllo sostituibile da tecnici specializzati
	Check product availability on weverducre.com	Informationen zur Verfügbarkeit der Produkte finden Sie auf weverducre.com	Controleer de productbeschikbaarheid op weverducre.com	Vérifier la disponibilité des produits sur weverducre.com	Compruebe la disponibilidad de los productos en weverducre.com	Le informazioni relative alla disponibilità dei prodotti sono consultabili su weverducre.com

Contact

REPRESENTATIVE OFFICES

UAE

Office No. 704, HDS Business Center
Cluster M
Jumeirah Lakes Towers, DMCC
PO Box 336603 Dubai
United Arab Emirates
Phone +971 4 436 23 47
office.me@weverducre.com

NETHERLANDS

Design Post Amsterdam
Cruquiusweg 111L
1019, AG Amsterdam
Phone +31 20 229 6001
info.nl@weverducre.com

NORWAY

Drammensveien 288
0283 Oslo
Phone +47 24 07 61 11
office.no@weverducre.com

SWITZERLAND

Sonnmatthof 3
6023 Rothenburg
Phone +41 41 361 60 60
office.ch@weverducre.com

INDIA

1524, Astralis, Supernova, Sector-94
201301, Noida, Uttar Pradesh
Phone +91 85 3013 0555
office.in@weverducre.com

HEAD OFFICE + SHOWROOM

WEVER & DUCRÉ BV

Spinnerijstraat 99/21
8500 Kortrijk
Belgium
Phone +32 56 492 800
office@weverducre.com
weverducre.com

SHOWROOMS

HONG KONG

RM. 1413, Block A, Sea View Estate
2 Watson Road North Point | Hong Kong
Phone +852 211 069 24
Fax +852 310 640 96
office.hk@weverducre.com
office.cn@weverducre.com

AUSTRIA

Gleisdorfer Gasse 15
8010 Graz
Phone +43 316 317 085 91
office.at@weverducre.com

Marxergasse 1B
1030 Vienna
Phone +43 1 526 47 84
office.at@weverducre.com

BELGIUM

Gare Maritime
Picardstraat 7, bus 304
1000 Brussels
Phone +32 56 492 800
office@weverducre.com

FINLAND

Sörnäistenkatu 1
00580 Helsinki
Phone +358 50 506 71 82
office.fi@weverducre.com

FRANCE

36, Rue Juliette Récamier
69006 Lyon
Phone +33 4 72 811 199
office.fr@weverducre.com

ITALY

Via Monte Popera 4/2
30027 San Donà di Piave - Venezia
Phone +39 0421 177 83 88
office.it@weverducre.com

GERMANY

Europa-Allee 18
60327 Frankfurt am Main
Phone +49 692 10295 90
office.de@weverducre.com

Schanzenstraße 36, Geb. 234B
51063 Cologne
Phone +49 221 130649 60
office.de@weverducre.com

Maybachstraße 10
70469 Stuttgart
Phone +49 711 806075 90
office.de@weverducre.com

SPAIN

Plaça Duc de Medinaceli 5
08002 Barcelona
Phone +34 93 5112 189
office.es@weverducre.com

UK


London, EC2A 3HH
Phone +44 203 174 01 77
info.uk@weverducre.com

POLAND

Diamond Business Park
Posag 7 Panien Street no 1
02-495 Warsaw
Phone +48 730 330 358
office.pl@weverducre.com

1st edition, March 2024

All prices are non-binding recommended prices excluding VAT, lamps (bulbs) are not included. The prices and terms of payment stated in our order confirmation shall apply. To all prices and all extra expenses, we add the legally applicable value added taxes. Should our costs increase by the time of delivery, the prices can be recalculated on a pro rata basis. The prices stated shall apply net ex works. Information on availability as well as delivery terms and dates are provided as a point of reference only and are not binding. Prices are valid till the publication of a new price list. We expressly reserve the right to make changes in price, measurements and design. The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product neither for any misprints and/or typing errors. We reserve the right to make alterations or modifications to our products at any time. All mentioned RAL codes are indicative and approximative. We shall not be held liable for any discrepancies which may occur. All mentioned lumen, beam angles, lifetime and SDCM values refer to white luminaires (in terms of finishing, covers or housings) in 3000K. Further values on request. The general terms and conditions of Wever & Ducré BV shall apply to all purchases and orders. The applicable version of the general terms and conditions can be viewed at weverducre.com/en/downloads.

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some (original) images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with a 

ARTWORK

GRAPHIC DESIGN

PRINT PRODUCTION

ILLUSTRATION

TEXT

LITHOGRAPHY

PROJECT MANAGEMENT

PRINTING

PHOTOGRAPHY

Zoie Lam, Hong Kong, China

Carola Friedrich, Carina Erlach

Carola Friedrich, René Zavadilík

Carina Erlach, Lukas Hoehenwarter

Tanja Petschnig

Volker Waldhauser

Carola Friedrich, Victoria Prath

Drukarnia Perfekt S.A., Warsaw, Poland

- Apresvino - (456-457), Alvaro Valdecantos (652, 794), @nina Struve for VRAI interior architecture (418), @nomadic_den (24, 126, 444), @stella (8, 11, 12, 14, 15, 18, 19, 21, 26, 27), Aikon-Producties-bvba (170), Aleksandr Dal Cero (190-191), Alexander Maria Lohmann (188), Andrea Badrutt Fotografie (286), Andrei Valeriu Radulescu (178), Anja Zalezina (488), Annelies Degroote (206), Architekturfotografie Oliver Hallwirth (490), Arnold Ory (60), Barbara Corsico (480), Ben Kwanten (24), Benni Janzen (476-477), Bert Demasure (376), Biderbost Photo (24), Bob Reijnders (120, 318), Capture Photography (118), Catherine Roider (24, 356, 424), Chang Sung Wah (1), Charlotte Kap (164), Chris Snook (92), Christian Brandstätter (706), Christian Jungwirth (40), Christian Repnik (800), Christoph Steinbauer (336, 502, 678, 684, 744), COLORNET-WORK® (20), Corinna Unterkofler/Joachim Grubelnik (736, 782), Dani Rovira Fotografia (802), Daniel Stauch (306), Davide Perbellini (266), Denise Zwijnen Photography (24, 222), Edgar Navarre (536), Elia Kuhn Photographie (72), Erich Sinzinger, 2019 (78, 776), Erik Đuriš (582-583), Evgenij Avramenko (540), Flare Department (24, 34), Gerald Van Rafelghem (750), Hanne Joosen Fotografie (180, 182), Hannelore Veelaert (610), In-Between Architects Limited (620), Ingo Rasp Photography (500), ISTHME Architecture & Urbanisme (76), Jan Kan (646), Jaro van Meerten - The Art of Living magazine (102, 354), Joachim Grothus/Herford/Germany (218), Jurrit van der Waal - The Art of Living magazine (534), Karsten Knocke (664), Kim Donggyu (390), Kris Dekeijser (24, 28, 38, 41, 42, 56, 62, 64, 66, 70, 80, 86, 96, 98, 100, 106, 122, 130, 136, 140, 144, 148, 150, 152, 158, 168, 172, 176, 184, 186, 192, 196, 202, 216, 246, 260, 272, 276, 282, 284, 288, 302, 308, 310, 320, 332, 334-335, 342, 350, 365-366, 392-393, 396, 408, 412, 420, 422, 426, 428, 436, 438, 440-441, 442, 448-449, 452-453, 468, 470, 472-473, 474, 478, 482, 486, 492, 506, 508, 532, 550, 560, 572, 576, 578-579, 580, 616, 636, 654, 656, 670, 672, 682, 686, 688, 694, 698, 702, 708, 716, 718, 728, 738, 742, 752, 754, 758, 760, 768, 778-779, 784, 786, 790, 798), Kris Dimitriadis/Kurt Dekeyzer studio PSG (552) Kurt Kuball (586, 692, 712, 730), Lennart Wiedemuth (460) Luc Roymans (466), Lukas Jahn (704) Margriet Hoekstra (194, 746), Mark Drotsky Architekturfotografie (618-619), Martin Grobe (558, 564-565) Matteo Michelino (24, 450), MattiaAquila (174), Maxi Conesa (240), Melvin Wong Weije (722), Miloš Martinović (9, 45, 134, 608), Miquel Llonch (11), Miriam Raneburger (696), Namsun Lee (208-209), Neil Sharp (504), nunofoto.com (720), Paloma Pacheco Turnes (24, 406, 602-603), Patricia Goijens (446), Paul Karalius (734), Paul Ott (10, 494-495), Paula Beetlestone (726), Petri Immonen (210), Philip Kottlorz Fotografie (274, 340, 566), Pilar Shoots (228-229), Pro Urban AG (430), Rupert Asanger (462), Salvatore Guido (22, 23, 37, 44, 112, 146, 204, 212, 214, 226, 234, 236, 238-239, 262, 264, 268, 270, 280, 304, 312, 314, 316, 328, 338, 352, 360, 378-379, 382, 398, 400, 412, 432, 434, 498, 514, 516, 518, 520, 524, 542, 554, 556, 562, 568, 570, 588, 590, 592, 594-595, 596, 598, 606, 612, 626, 638, 648, 650, 660, 662), SCHWARZ-LICHT / fotografie + kommunikation (404), Sergey Bezuglov (104), Sergio Camplone (128, 464), Søren Kristensen (142), Space content Studio (574-575), Stijn Poelstra (544, 600), Studio Ciao (394), Studio Erick Saillel (84), Studio Gataric Fotografie (640), Sue Baer (416), Supereal.LU (242, 244-245), Tom Ferguson Photography (454), Tom Lierman photography (322) Trien Byttebier, Uliana Grishina Interior and Architectural Photographer @uliana.grishinaa (604), Victor Sajara Photography (774), Walters Media (546), Zvonimir Mihaljek (714)

Index by name

1-PHASE TRACKS	331
3-PHASE TRACKS	349
BENTO	555
BISHOP	455
BLAS CEILING SURFACE	697
BLAS WALL SURFACE	743
BLIEK PETIT CEILING RECESSED	123
BLIEK PETIT CEILING SURFACE	235
BLIEK ROUND	127
BLIEK SQUARE	129
BLINK	753

BOX

BOX CEILING SURFACE	169
BOX CEILING SURFACE EXTERIOR	695
BOX MINI CEILING SURFACE	165
BOX MINI WALL SURFACE	533
BOX ON STREX	311
BOX WALL SURFACE	535
BOX WALL SURFACE EXTERIOR	733

CARD	751
------	-----

CENO

CENO CEILING RECESSED	119
CENO CEILING SURFACE	227
CENO FORT ON 3-PHASE TRACK	353
CENO ON STREX	303
CENO WALL SURFACE	513

CENTRAL	551
CENTRAL EXTERIOR	727
CHART	761
CHART ASYM	763
CITY IP44	159

CLEA

CLEA CEILING SURFACE	271
CLEA CEILING SUSPENDED	483
CLEA MULTI	483
CLEA WALL SURFACE	571

CONE	403
CORK	405
COSTA	801
DARF CEILING SUSPENDED	391
DARF WALL SURFACE	559

DEEP

DEEP	65
DEEP ADJUST	71
DEEP ADJUST ASYM	77
DEEP ADJUST FORT	79
DEEP ADJUST PETIT	69
DEEP ADJUST PETIT TRIMLESS	69
DEEP ADJUST TRIMLESS	75
DEEP BIJOU	61
DEEP BIJOU IP65	137
DEEP BIJOU IP65 EXTERIOR	671
DEEPER	67
DEEPER IP44	143
DEEP IP44 IP65	141
DEEP IP65 EXTERIOR	675
DEEP PETIT	63
DEEP PETIT IP65	139
DEEP PETIT IP65 EXTERIOR	673
DEEP POINT	59
DEEP POINT IP44	135

DINOR

DINOR	493
-------	-----

DOCUS

DOCUS CEILING SURFACE	175
DOCUS MINI CEILING SURFACE	173
DOCUS MINI WALL SURFACE	539
DOCUS ON STREX	313

DOMINO

DRO

DRO CEILING SURFACE	263
DRO CEILING SUSPENDED	413
DRO FLOOR SURFACE	661
DRO ON 1-PHASE TRACK	341
DRO TABLE	649
DRO TABLE FLOOR SURFACE	647
DRO WALL SURFACE	557

ELLO CEILING SUSPENDED	395
ELLO SYSTEM	362

FIL

FIL CEILING SUSPENDED	383
FIL SPIN CEILING SURFACE	251
FIL SPIN WALL SURFACE	615

FINELLE CEILING SUSPENDED	381
---------------------------	-----

FINLIN

FINLIN ROUND	613
FINLIN SURFACE	277
FINLIN SUSPENDED	385
FINLIN WALL	609
FINLIN FLOOR SURFACE	657

GATE FLOOR SURFACE EXTERIOR	789
GEO FLOOR SURFACE EXTERIOR	769
GIGANT	397

HEXO

HEXO CEILING SURFACE	181
HEXO CEILING SUSPENDED	471
HEXO MINI CEILING SURFACE	179
HEXO MINI WALL SURFACE	541
HEXO MULTI	471
HEXO ON 1-PHASE TRACK	343
HEXO ON 3-PHASE TRACK	355
HEXO ON STREX	315

ILANE	367
INTRA	679

J.J.W.

J.J.W. CEILING SURFACE	273
J.J.W. CEILING SUSPENDED	437
J.J.W. WALL SURFACE	573

KIOSK WALL SURFACE EXTERIOR	725
KIOSK FLOOR SURFACE EXTERIOR	775

KUJO CEILING SUSPENDED	387
LECA CEILING RECESSED	109
LECA CEILING SURFACE	221
LEENS	553
LINUS	799
LITO	501
LUNA ROUND IP44	151
LUNA SQUARE IP44	151
MAP	755
MAP ASYM	759

MATCH

MATCH CEILING RECESSED	113
MATCH CEILING SURFACE	223
MATCH CEILING SUSPENDED	407
MATCH POINT	57
MATCH POINT IP44	57
MATCH SNOOZE	623
MATCH STICK	117
MATCH SURFACE ON STREX	307
MATCH SUSPENDED ON STREX	321
MATCH WALL	515
MATCH FLOOR SURFACE	659

MATCH CEILING RECESSED	113
MATCH CEILING SURFACE	223
MATCH CEILING SUSPENDED	407
MATCH POINT	57
MATCH POINT IP44	57
MATCH SNOOZE	623
MATCH STICK	117
MATCH SURFACE ON STREX	307
MATCH SUSPENDED ON STREX	321
MATCH WALL	515
MATCH FLOOR SURFACE	659

MICK

MICK CEILING SURFACE	237
MICK ON STREX	309
MICK SNOOZE	625
MICK WALL SURFACE	627

MILES	601
MIRBA IP44	641

Index by name

MIRBI

MIRBI IP44 CEILING RECESSED	157
MIRBI IP44 CEILING SURFACE	283
MIRBI LONG IP44	643

MIRRO

MIRRO CEILING SURFACE	267
MIRRO CEILING SUSPENDED	431
MIRRO FLOOR SURFACE	663
MIRRO TABLE	651
MIRRO WALL SURFACE	581
MIRRO SOFT CEILING SURFACE	269
MIRRO SOFT CEILING SUSPENDED	433
MIRRO SOFT WALL SURFACE	585

NET	377
-----	-----

ODREY

ODREY CEILING SUSPENDED	461
ODREY MULTI	461
ODREY ON 1-PHASE TRACK	345
ODREY ON STREX	323
ODREY WALL SURFACE	525

ORIS	509
ORIS EXTERIOR	707
PALOS WALL SURFACE EXTERIOR	741
PALOS CARRÉ FLOOR SURFACE EXTERIOR	795
PALOS ROUND FLOOR SURFACE EXTERIOR	791

Index by name

PERLEZ

PERLEZ IP44 CEILING RECESSED	155
PERLEZ IP44 CEILING SURFACE	279
PERLEZ SPIN	255
PERLEZ GRID	259
PERLEZ IP44 WALL SURFACE	635

PIRRO

PIRRO CEILING RECESSED	93
PIRRO ON 1-PHASE TRACK	339
PIRRO OPAL	211
PIRRO PETIT CEILING RECESSED	91
PIRRO PETIT CEILING SURFACE	203
PIRRO SPOT CEILING SURFACE	205
PIRRO SYSTEM	361

PLANO PETIT CEILING RECESSED	97
PLANO CEILING RECESSED	99
PLANO IP44 CEILING RECESSED	153
PLANO PETIT CEILING SURFACE	213
PLANO CEILING SURFACE	215
POLA FLOOR SURFACE EXTERIOR	773

RAY

RAY CEILING SURFACE	189
RAY CEILING SURFACE EXTERIOR	689
RAY CEILING SUSPENDED	469
RAY MINI CEILING SURFACE	185
RAY MINI WALL SURFACE	543
RAY MULTI	469
RAY ON 1-PHASE TRACK	343
RAY ON 3-PHASE TRACK	355
RAY ON STREX	317
RAY WALL SURFACE	545
RAY WALL SURFACE EXTERIOR	721

REED FLOOR SURFACE EXTERIOR	771
RETO WALL RECESSED	499
RETO WALL RECESSED EXTERIOR	703
RETO WALL SURFACE EXTERIOR	739
REVER DINING	655
RINI SNEAK IP44	149
ROB EXTERIOR	699
ROB IP44	285
ROBY IP44	287
RONY	85
RONY POINT	83
RON	87

ROOMOR

ROOMOR SUSPENDED	445
ROOMOR FLOOR SURFACE	665
ROOMOR OFFICE CABLE SUSPENDED	451
ROOMOR OFFICE CEILING SURFACE	275
ROOMOR OFFICE ON TRACK	357
ROOMOR TABLE	653
ROOMOR WALL SURFACE	561

RUVI CEILING RECESSED	131
RUVI IP44 WALL SURFACE	639

SARA

SARA ON 1-PHASE TRACK	333
SARA ON BASE	241
SARA SNOOZE	621

SCAVA	631
SHIEK	487
SHIEK MULTI	487

SIRRO	217
SNEAK	105
SNEAK TRIMLESS	107
SOLID BIJOU	193
SOLID	197
SOLID PETIT	195
SOLLI ON STREX	329
SOLLI	409
SOLLI COCOON	411
SPINEO	81
SQUBE ON BASE	243
SQUBE ON 1-PHASE TRACK	337
SQUBE ON 3-PHASE TRACK	351
STAKE	785
STAKE FOLD	785
STIPO EXTERIOR	783
STRANGE CEILING RECESSED	103
STRANGE PETIT TRIMLESS	101
STRANGE TRIMLESS WALL RECESSED	505
STREX MODULE DOT	319
STREX MODULE OPAL	319
STREX SYSTEM 48V	294
STRIPE	503
SWAM FLOOR SURFACE	777
SWAM WALL SURFACE	747

TAIO

TAIO CEILING RECESSED EXTERIOR	677
TAIO CEILING SURFACE EXTERIOR	687
TAIO IP65 CEILING RECESSED	147
TAIO IP65 CEILING SURFACE	281
TAIO WALL SURFACE EXTERIOR	719

TAPE FLOOR SURFACE	781
TAPE WALL SURFACE	745
TAPIS	591
TAPIS SOFT	597
THEMIS	507
TOWNA IP44	289

Index by name

TRACE

TRACE CEILING SURFACE	201
TRACE CEILING SUSPENDED	399
TRACE CHANDELIER	373
TRACE SPIN	253
TRACE GRID	257
TRACE SLIM	521
TRACE WALL	517

TRAIN

TRAIN	549
TRAIN CEILING SURFACE EXTERIOR	691
TRAIN WALL SURFACE EXTERIOR	723

TRAM CEILING SURFACE EXTERIOR	683
TRAM WALL SURFACE EXTERIOR	713
TUBE CARRÉ CEILING SURFACE EXTERIOR	693
TUBE CARRÉ WALL SURFACE EXTERIOR	729
TUBE CEILING SURFACE EXTERIOR	685
TUBE WALL SURFACE EXTERIOR	715
VENN CEILING SURFACE	261
VENN WALL SURFACE	617
WETRO	475
WETRO MULTI	475

WIRO

WIRO CEILING SURFACE	265
WIRO CEILING SUSPENDED	417
WIRO CONE	417
WIRO DIAMOND	423
WIRO GLOBE	427
WIRO WALL SURFACE	569

X-BEAM WALL SURFACE	737
X-BEAM FLOOR PROJECTOR	787

IT'S A MATERIAL WORLD

Colours and materials



For specific information on colour and finishes please refer to weverducre.com/materials

Depending on the product and application, the materialization may differ. For more informations on materials, finishes, structures, RAL and NCS colour codes, please check our product page on the website. RAL and NCS colour codes are always approximate and can be checked by the customer based on samples.

Outdoor

METAL

	W	White
	D	Grey
	A	Anthracite Grey
	Q	Bronze
	G	Gold
	B	Black
	K	Black and Gold

	I	Inox 304 Stainless steel electro polished
--	----------	---

POLYPROPYLENE

	YE	White and Colza Yellow
	OR	White and Traffic Orange
	SB	White and Water Blue
	OB	White and Black

Indoor

RECYCLED PET FELT

	WF	White
	MF	Marble Grey
	LF	Limestone
	OF	Oxide Red
	IF	Indigo Blue
	AF	Anthracite
	F	Grey

ALUMINIUM COMPOSITE MATERIAL

	GB	Black and Light Gold
	NB	Black and Black Chrome
	LB	Black and Glossy Aluminium

MARBLE

	MB	Black
	MW	White

GLASS HANDBLOWN

	TS	Smoked Striped
	TW	Taupe White
	DW	Dark Taupe White
	TD	Smoked Diamond
	FD	Frosted Diamond Opal
	P	Copper Plated
	B	Smoked
	W	White Opal

PLASTER

	GW	Give Warmth
	ST	Stay Together
	RA	Raw material for custom paint
	FJ	Feel Jade

METAL

	E	White and Black
	J	White and Gold
	WM	White and Champagne
	GB	Gold and Black
	H	Champagne and Black
	K	Black and Gold
	CH	Black and Champagne
	BQ	Black and Bronze
	Z	Black and Copper
	BL	Black and Aluminium
	GW	Cement Grey and White
	RR	Coral Red and White

OTHERS

	W	White LLDPE
	D	Grey Texture Composite material

METAL

	W	White
	S	Silver
	L	Aluminium
	G	Gold
	M	Champagne
	Q	Bronze
	P	Copper
	V	Rust
	B	Black
	A	Anodised Aluminium
	LS	Live Simple
	SG	Silk Grey
	FJ	Feel Jade
	CC	Come Closer



4
5
8
7
6